
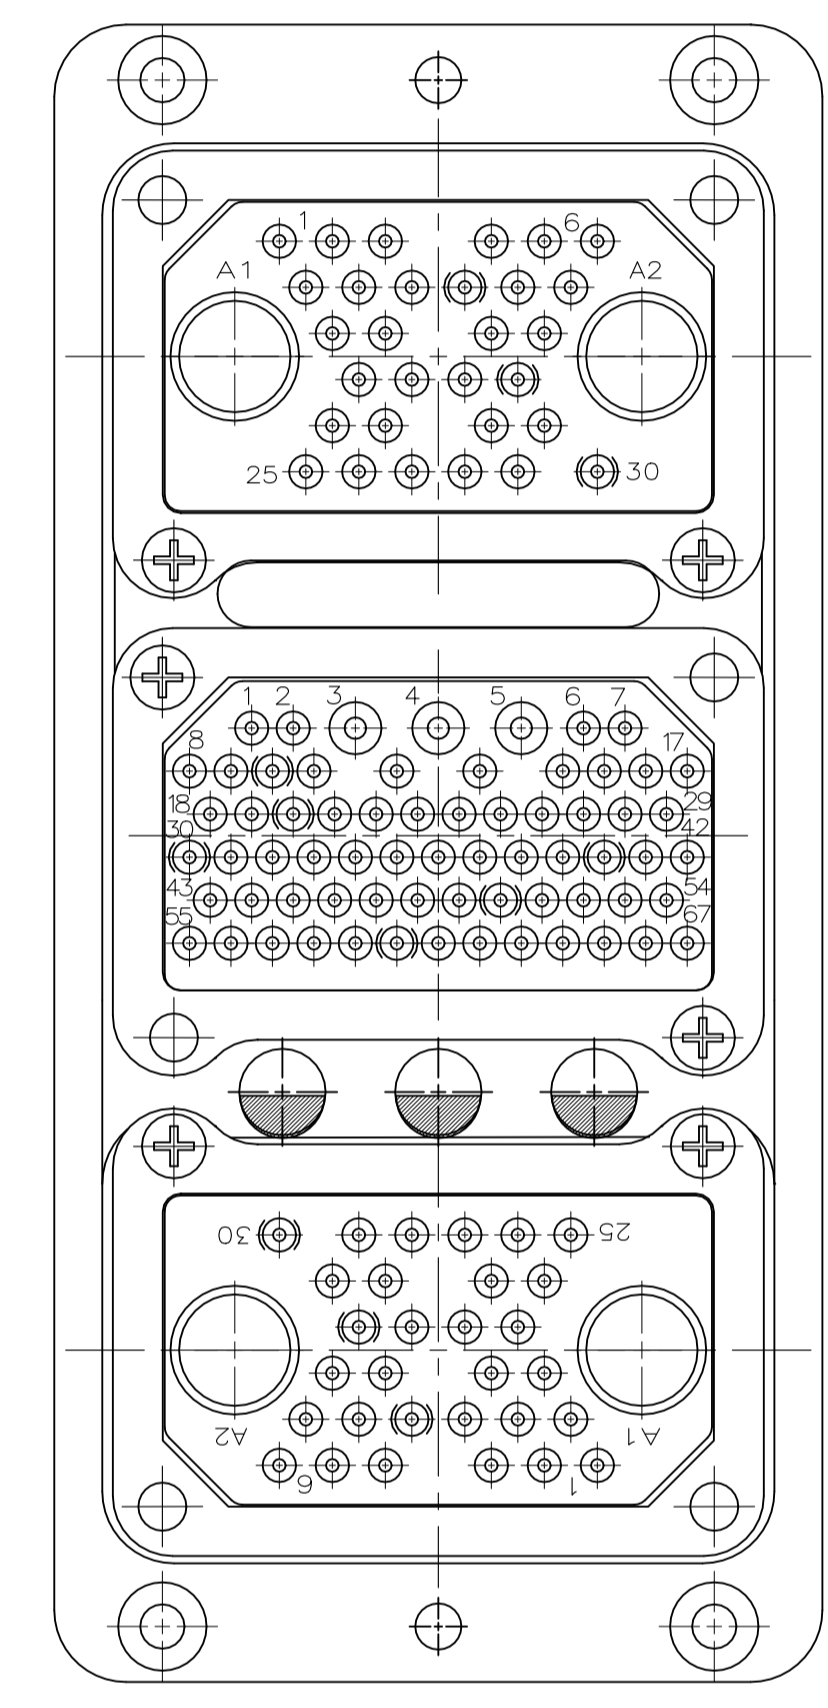
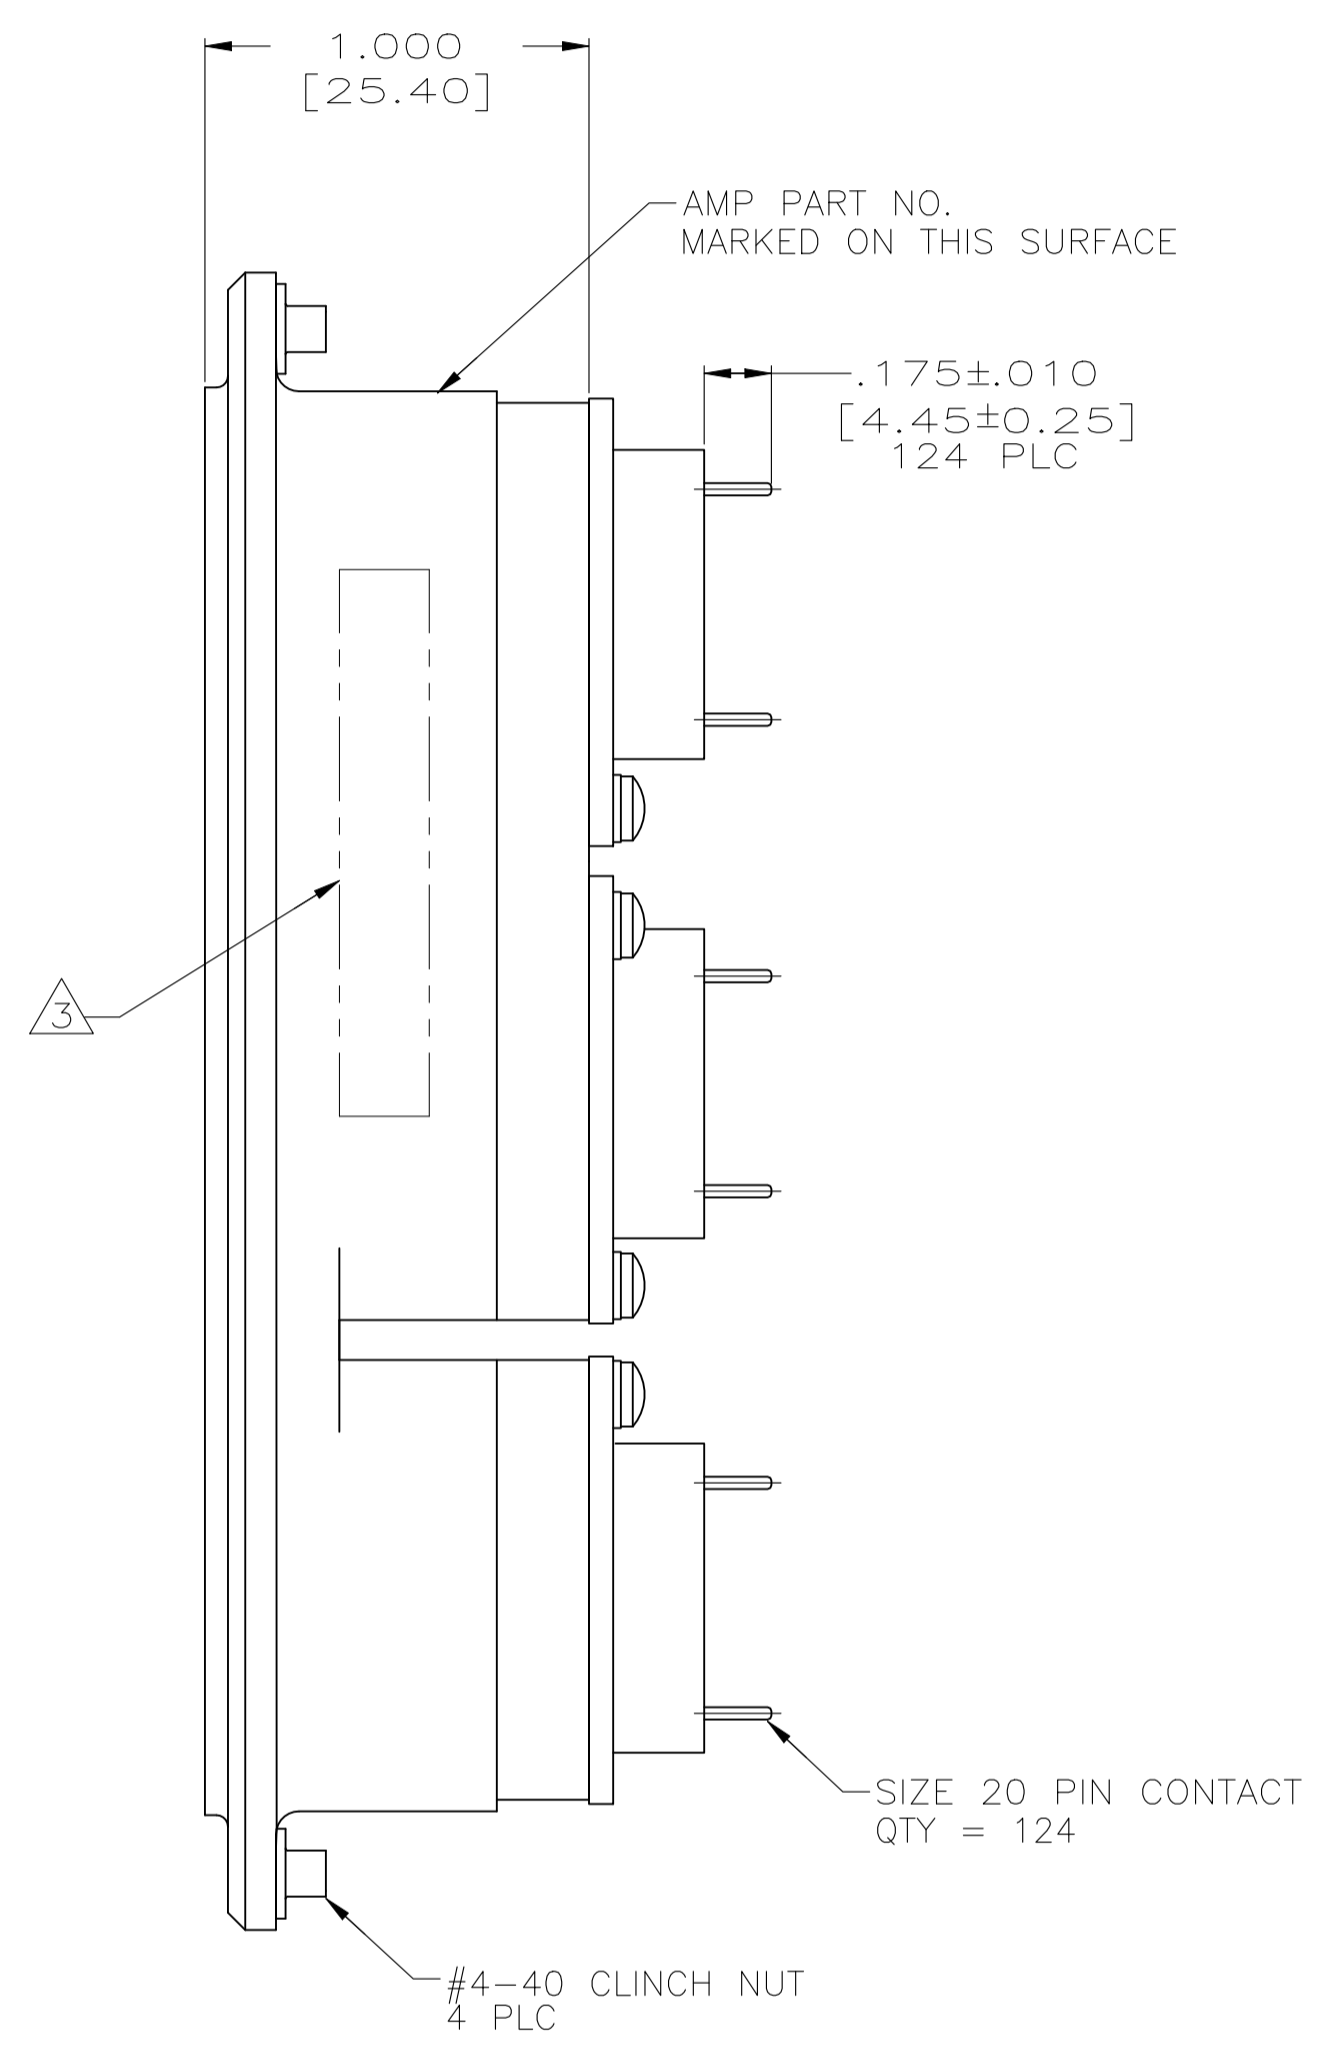


REVISIONS				
P	LTR	DESCRIPTION	DATE	APPV
A		REV PER ECO 20-007007	2-12-20	CT RL

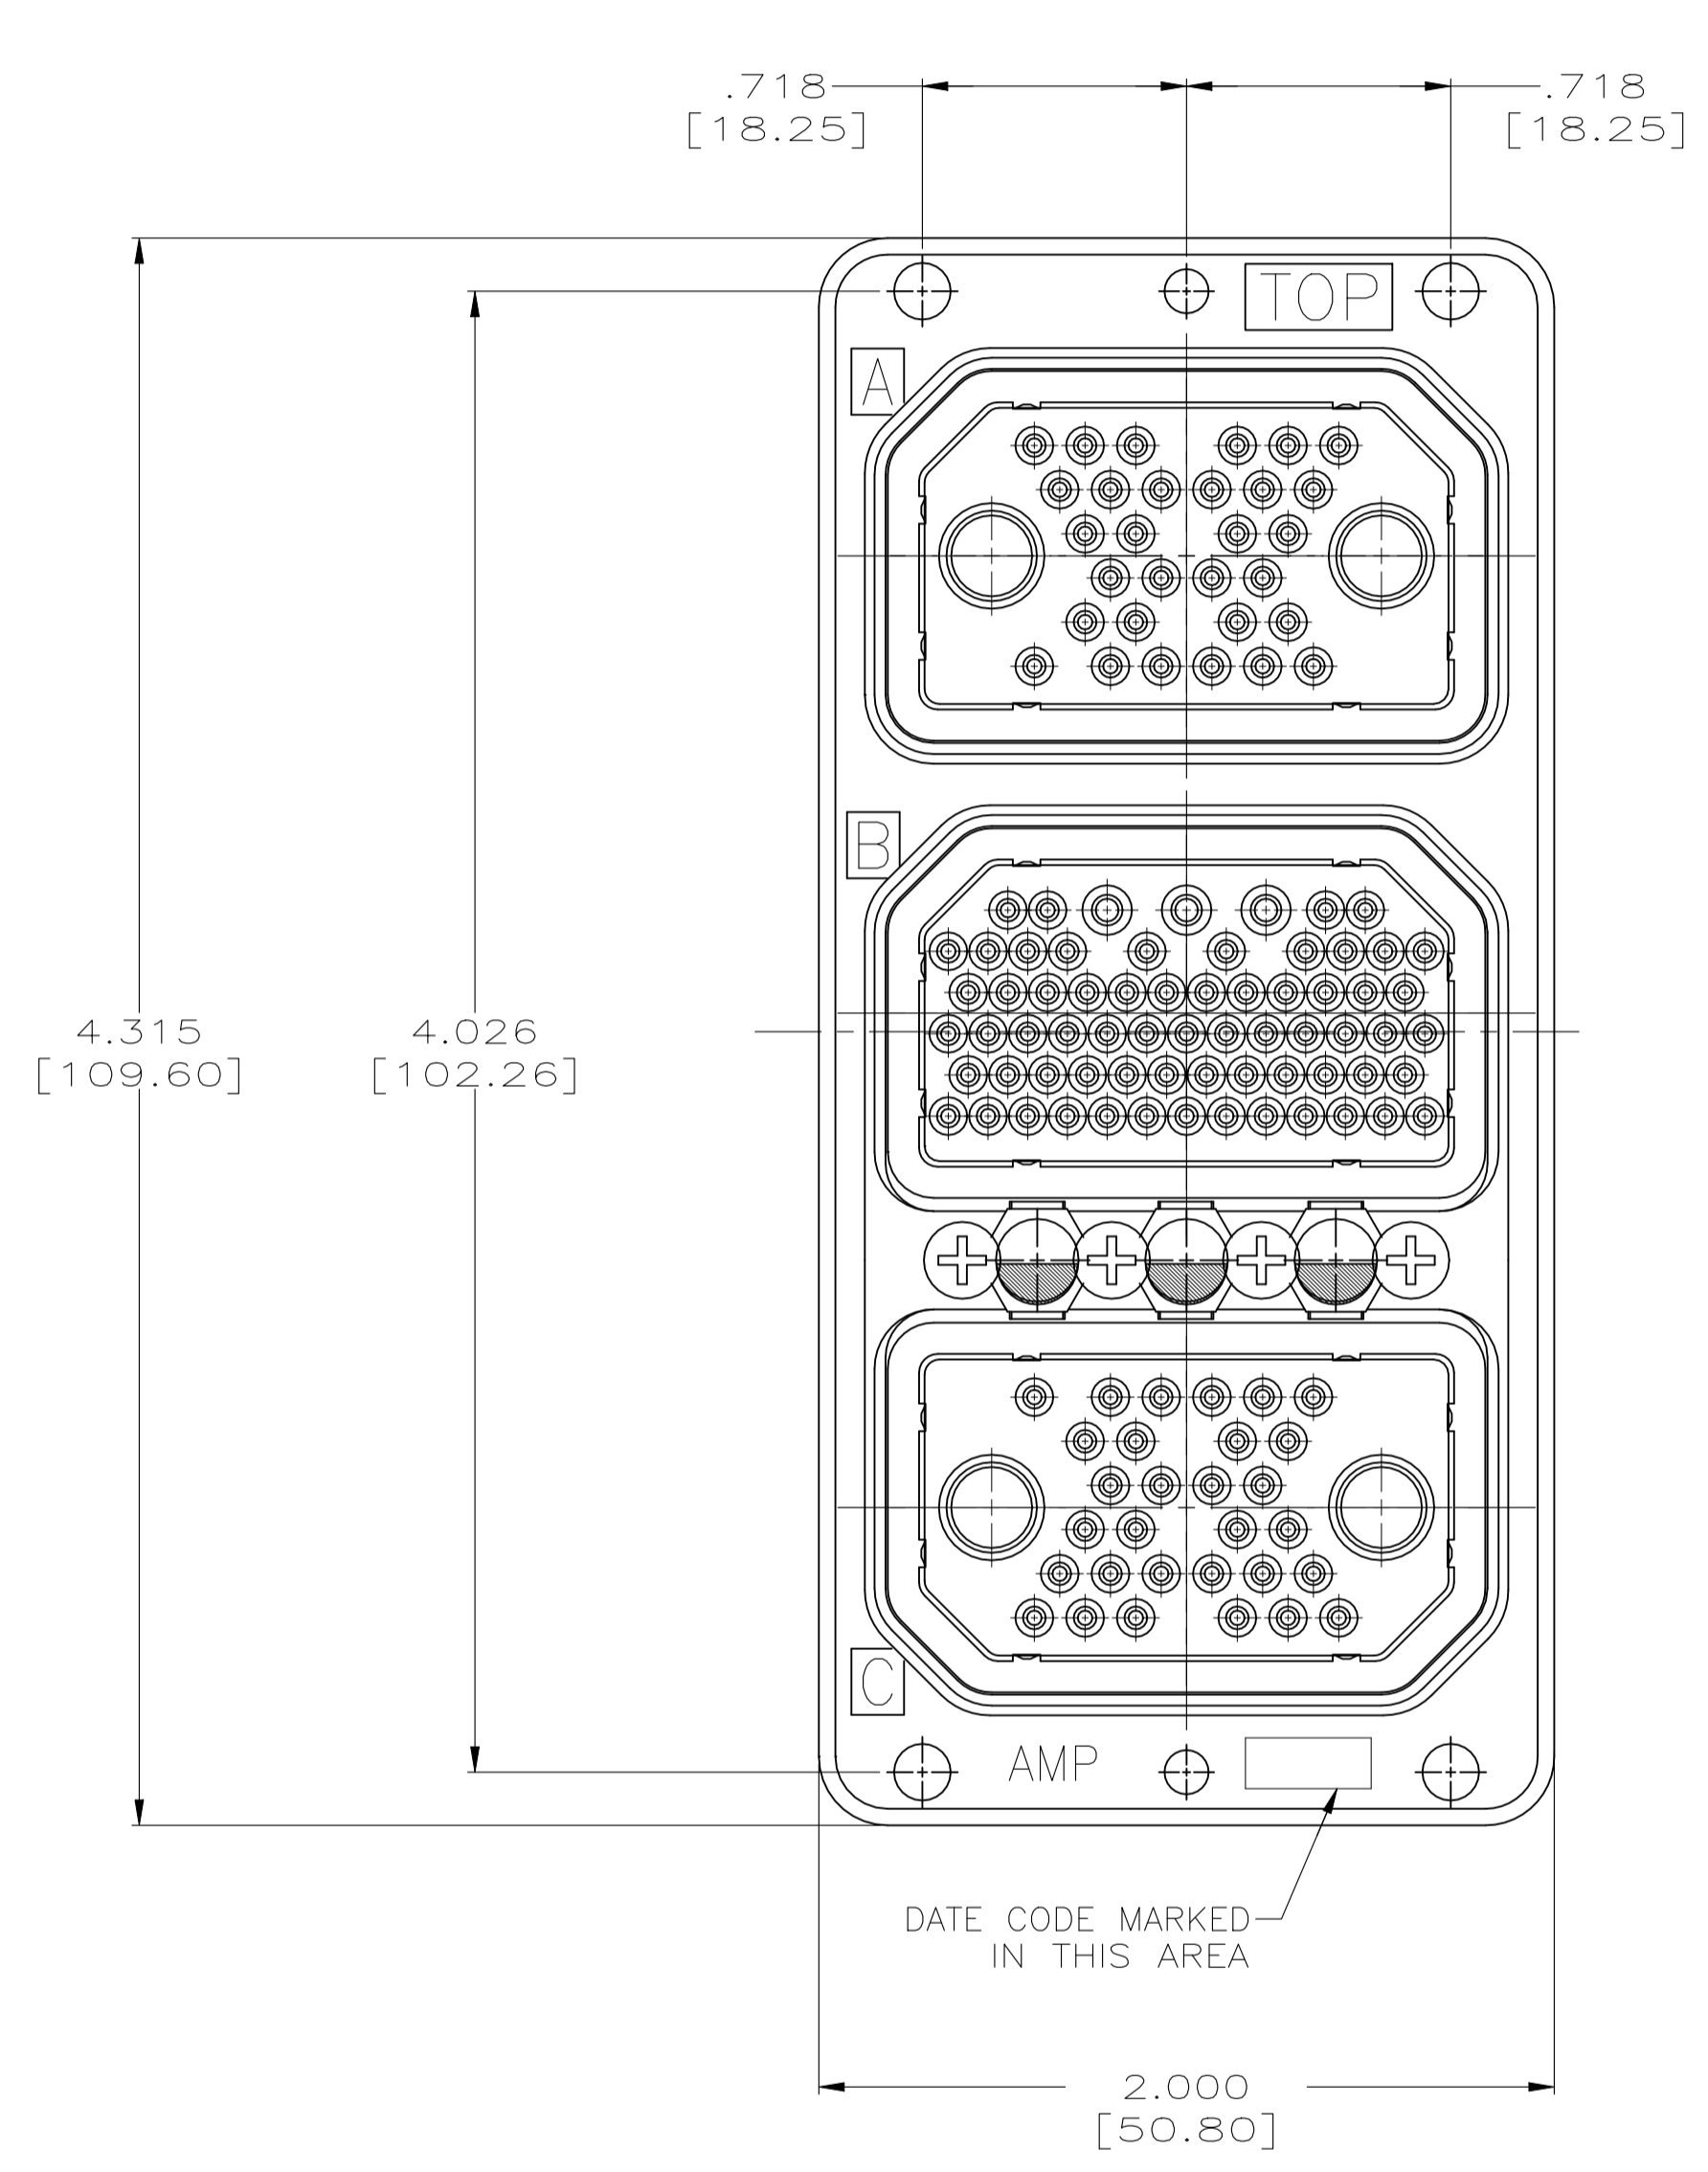

- △ MATERIAL AND FINISH:
 SHELL: DIE CAST ALUMINUM PER FED. SPEC QQ-A-591 OR ASTM B211 6061-T6/6511 OR ASTM B209 2024-T4/T351
 STANDARD FINISH: CADMIUM PLATE PER QQ-P-416, TYPE I, CLASS 2 YELLOW CHROMATE CONVERSION.
 INSERT RETENTION PLATE: ALUMINUM ALLOY, BLUE ANODIZE PER MIL-A-8625.
 SCREWS AND WASHERS: STAINLESS STEEL, PASSIVATED.
 POLARIZING POSTS: STAINLESS STEEL, PASSIVATED.
 POLARIZING NUTS: BRASS, CADMIUM PLATED.
2. KEYING IS SET IN POSITION "01".
- △ 921121-1, REV B AND DATE CODE XXYY, (WHERE XX = WEEK, YY = YEAR) MARKED IN APPROX AREA SHOWN WITH .047 [1.19] MIN HIGH CHARACTERS.

615040	1484650-1
AIRSHOW	PART NO.
PART NO. REF	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG: C.C.THOMAS 7-30-03	TE Connectivity	
DIMENSIONS: INCHES		CHK: D.FABY 4-26-06	NAME: RECEPTACLE ASSY.SRINC 404.SPECIAL RM3R32C2P67P32C2P-0101)200)	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPV: D.FABY 4-28-06	PRODUCT SPEC	
0 PLC	± .010	APPLICATION SPEC		
1 PLC	± .010	SIZE: A1		
2 PLC	± .010	CAGE CODE: 00779		
3 PLC	± .010	DRAWING NO: 1484650		
4 PLC	± .010	WEIGHT: 0.000000		
ANGLES	± .010	CUSTOMER DRAWING		
MATERIAL: ALUMINUM		SCALE: 2:1		
FINISH: ANODIZED		SHEET: 1 of 1		
		REV: A		