


Data sheet | Item number: 750-489

4-channel analog input; RTD/TC/Strain Gauge; 16 bits; Diagnostics;

Intrinsically safe

www.wago.com/750-489

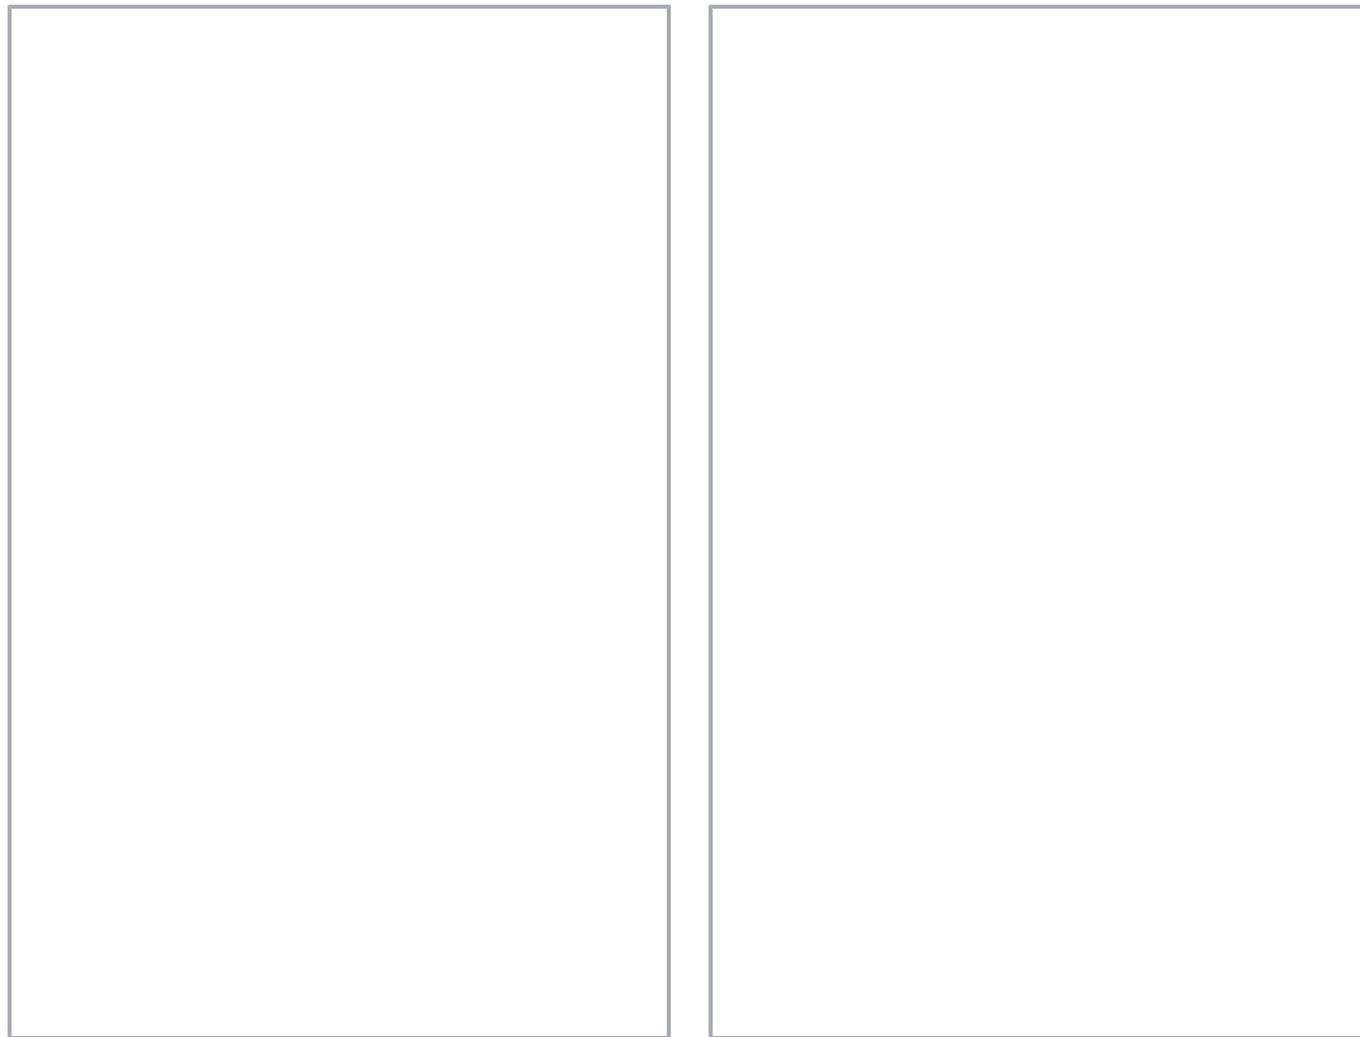

Subject to changes. Please also observe the further product documentation!


WAGO GmbH & Co. KG
Hansastraße 27

32423 Minden

Phone: +49 571 887-0 | Fax: +49 571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

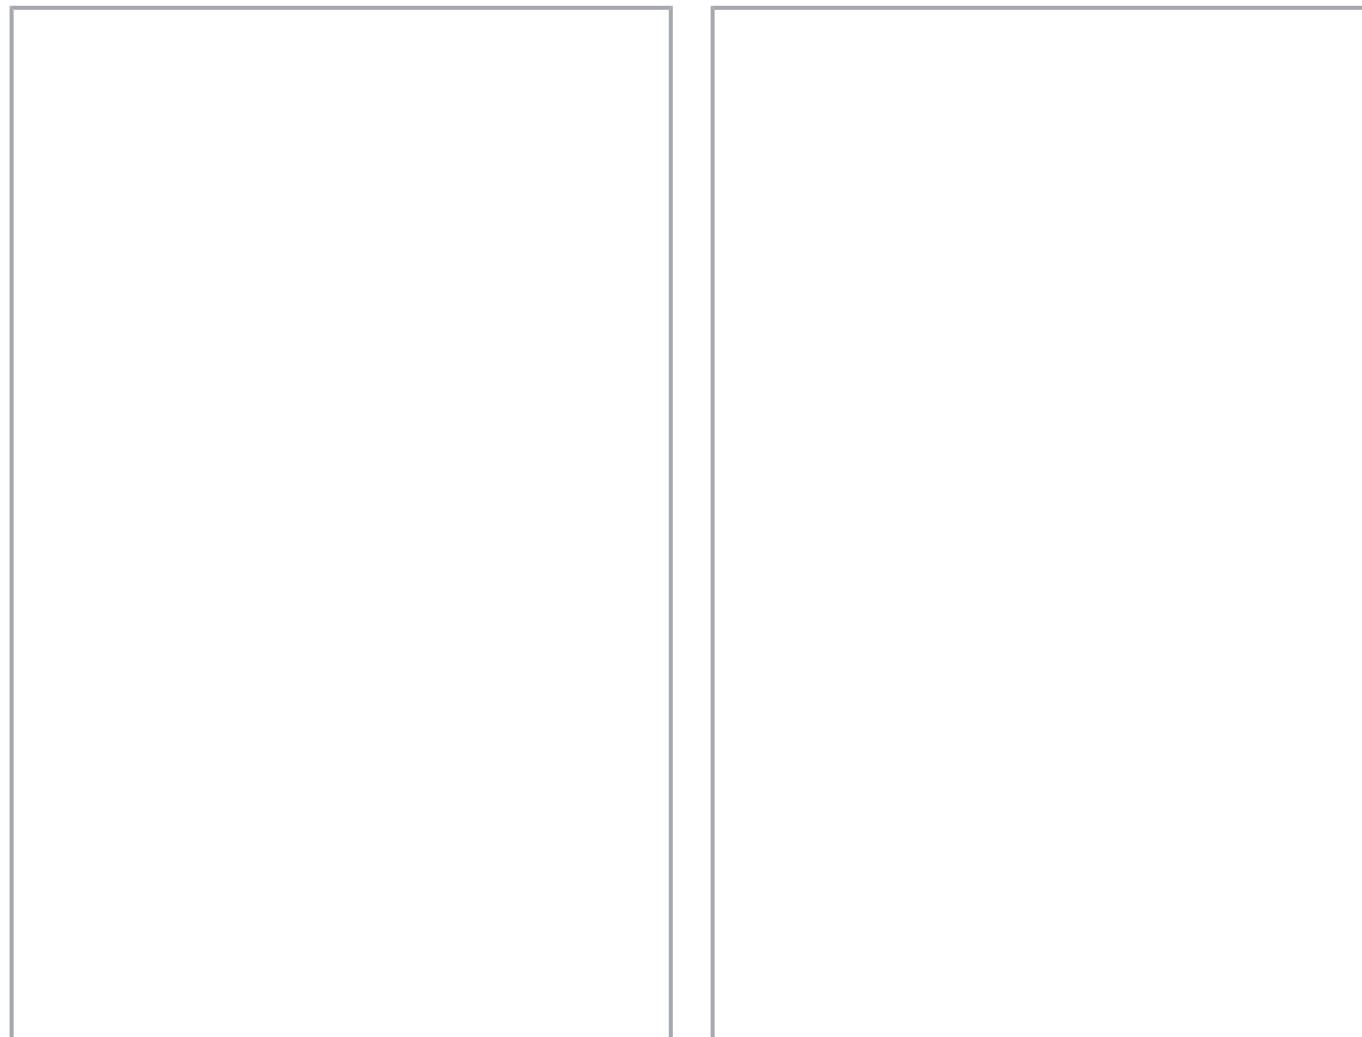

Item description

This analog input module directly connects resistance thermometers, thermocouples, millivolt sensors, resistors, resistor bridges (strain gauges), potentiometers and PTC thermistors operating in the hazardous environments of Zones 0 and 1. Cold junction compensation for the respective channel is incorporated into the module.

The WAGO I/O System 750 must be installed either in Zone 2 or in a non-hazardous area.

The 24 V supply is derived from the module's power jumper contacts.

The shield directly connects to the DIN-rail.

The parameters are set via the GSD file, *e!COCKPIT* or *WAGO-I/O-CHECK*.

Indicators:

- Green LED (availability ON/OFF)
- Red LED (underflow, overflow, measurement range overflow/underflow)

Subject to changes. Please also observe the further product documentation!

Field and system levels are electrically isolated.

A functional galvanic isolation is provided between the channels.

Data Notes

Note

The analog input module must only be operated via 24 VDC Ex i!

General information (e.g., installation regulations) on explosion protection is available in the WAGO I/O System 750 manuals!

Technical data

Number of analog inputs	4
Total number of channels (module)	4
Signal type	Potentiometer positions Thermocouple Resistive temperature device Resistors mV encoder
Signal type (configurable)	Yes
Sensor connection	4 x (2-wire); RTD/R; 3-wire; 4-wire
Measurement range	Resistive temperature devices: Pt100, Pt200, Pt500, Pt1000, Ni100, Ni120, Ni200, Ni500, Ni1000, Ni1000-TK5000; Resistors: 250 Ω, 500 Ω, 1 kΩ, 2 kΩ, 4 kΩ, PTC; Potentiometer setting: 0 ... 100 %; Thermocouples: Type B (+250 ... +1,820 °C); Type C (0 ... +2,315 °C); Type E (-200 ... +1,000 °C); Type J (-210 ... +1,200 °C); Type K (-200 ... +1,372 °C); Type N (-200 ... +1,300 °C); Type R, S (-50 ... +1,768 °C); Type T (-200 ... +400 °C); mV sensors: ±30 mV; ±60 mV; ±120 mV; ±250 mV; ±500 mV; ±1,000 mV; ±2,000 mV; Thermistor: PTC; Resistor bridges (strain gauges): U _{ref} : 2.4 V; Ud: ±15 mV, ±30 mV, ±60 mV
Resolution (over entire range)	0.1 K of full scale value; 0.01 K of full scale value (restricted to -50 °C ... +150 °C)
Conversion time	≥10 ms/2 wires (per channel)*; ≥20 ms/3 wires, 4 wires (per channel) *; *for RTD/R; TC/U conversion time depends on module setting
Measurement error (25 °C)	In delivery state: ±0.2 % of the upper-range value (value achieved during calibration in operating environment 0 ≤ TA ≤ 55 °C); After user calibration: ±0.05 % of the upper-range value (only valid in the thermally stable operating state)

Subject to changes. Please also observe the further product documentation!

Temperature coefficient	±0.001 %/K of the upper-range value
Cold junction compensation	integrated
Intrinsic safety Ex i	Yes
Data width	4 x 16-bit data; 4 x 8-bit control/status (optional)
Configuration options	WAGO-I/O-CHECK CODESYS Library e!COCKPIT
Supply voltage (system)	5 VDC; via data contacts
Current consumption (5 V system supply)	60 mA
Supply voltage (field)	24 VDC; (Ex i power supply: U_O = max. 27.3 V); via power jumper contacts (power supply via blade contact; transmission via spring contact)
Current consumption, field supply (module with no external load)	120 mA
Power loss P_I	1.6 W
Isolation	Per EN/IEC 60079-11: 300 VAC system/supply; per EN/UL 61010-2-201: 1200 VDC system/supply/channel
Number of incoming power jumper contacts	2
Number of outgoing power jumper contacts	2
Indicators	LED (A, C, E, G) green: Function AI 1 ... AI 4; LED (B, D, F, H) red: Error AI 1 ... AI 4
Marking	ATEX/IECEx: II 3 (1) G Ex ec [ia Ga] IIC T4 Gc; II (1) D [Ex ia Da] IIIC; I (M1) [Ex ia Ma] I

Explosion protection

Ex standard	EN IEC 60079-0, -7, -11
Safety-relevant data (circuit)	$U_o = 4 \text{ V}$; $I_o = 13.46 \text{ mA}$; $P_o = 13.46 \text{ mW}$; linear characteristic curve
Reactances Ex ia IIC	$L_o = 0.19 \text{ H}$; $C_o = 100 \mu\text{F}$
Reactances Ex ia IIB	$L_o = 0.78 \text{ H}$; $C_o = 1000 \mu\text{F}$
Reactances Ex ia IIA	$L_o = 1.57 \text{ H}$; $C_o = 1000 \mu\text{F}$
Reactances Ex ia I	$L_o = 2.57 \text{ H}$; $C_o = 1000 \mu\text{F}$
Reactances (note)	Reactances, if the internal inductance L_i or capacitance C_i (without cable) of the connected device is $\leq 1\%$ of the specified values.

Connection data

Connection technology: inputs/outputs	16 x CAGE CLAMP®
Connection type 1	Inputs/outputs

Subject to changes. Please also observe the further product documentation!

Solid conductor	0.08 ... 2.5 mm ² / 28 ... 14 AWG
Fine-stranded conductor	0.08 ... 2.5 mm ² / 28 ... 14 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data

Width	24 mm / 0.945 inches
Height	100 mm / 3.937 inches
Depth	67.8 mm / 2.669 inches
Depth from upper-edge of DIN-rail	60.6 mm / 2.386 inches

Mechanical data

Mounting type	DIN-35 rail
---------------	-------------

Material data

Housing material	Polycarbonate; polyamide 6.6
Fire load	2.036 MJ
Weight	99.3 g
Conformity marking	CE

Environmental requirements

Ambient temperature (operation)	0 ... +55 °C
Ambient temperature (storage)	-25 ... +85 °C
Protection type	IP20
Pollution degree	2 per IEC 61131-2
Operating altitude	0 ... 2000 m / 0 ... 6562 ft
Mounting position	horizontal (standing/lying); vertical
Relative humidity (without condensation)	95 %
Vibration resistance	4g per IEC 60068-2-6
Shock resistance	15g per IEC 60068-2-27
EMC immunity to interference	per EN 61000-6-2, marine applications
EMC emission of interference	per EN 61000-6-3, marine applications
Exposure to pollutants	per IEC 60068-2-42 and IEC 60068-2-43

Commercial data

ETIM 8.0	EC001596
ETIM 7.0	EC001596

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastraße 27

32423 Minden

Phone: +49 571 887-0 | Fax: +49 571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

Recupel Type	
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	DE
Customs tariff number	85389099990

Environmental Product Compliance

CAS-No.	1303-86-2 1317-36-8 7439-92-1
REACH Candidate List Substance	Diboron trioxide Lead Lead monoxide
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	2e967755-29fa-4c20-883b-b9085830cedb
SCIP notification number (Belgium)	2b743fd2-d462-4b6d-b4a1-7992ed6bca5f
SCIP notification number (Bulgaria)	cd3136c4-5842-493a-a6c7-aaccbae35441
SCIP notification number (Czech Republic)	06e947da-9a5e-4f16-86d6-d6c3a2a72497
SCIP notification number (Denmark)	7f96b952-ca60-43e7-b2df-fb463a8cb615
SCIP notification number (Finland)	2d55b01b-e34c-4619-a37c-47e3d79f3158
SCIP notification number (France)	a325a1e0-ba65-4396-a8ab-1b4499385f8f
SCIP notification number (Germany)	85e3688e-39a6-447b-aa87-ad08b282a833
SCIP notification number (Hungary)	5df6d0ea-10d7-4caf-85f2-5569529bf243
SCIP notification number (Italy)	2616f35b-5661-4756-8961-a4f345a9e642
SCIP notification number (Netherlands)	f4f4df14-9da6-4e9c-b012-e425bf3a5b61
SCIP notification number (Poland)	97af6679-bfe0-4362-bcc4-b2ff7c57ccfb
SCIP notification number (Romania)	5d2755b8-7838-4e0c-9775-0a99aa0c54a9
SCIP notification number (Sweden)	f00e1d03-d337-4ba2-94ea-69972672f649

Commercial data

Customs tariff number	
-----------------------	--

Approvals / Certificates

General approvals

Certificate

Subject to changes. Please also observe the further product documentation!

Logo	Approval	Additional Approval Text	name
	EAC Brjansker Zertifizierungsstelle	TP TC 020/2011	EAC RU C- DE.AM02. B.00087 /19
	EAC Brjansker Zertifizierungsstelle	TP TC 012/2011	EAC RU C- DE.AD07. B.03957- 21 (2Exe [iaGa] IIC GCX, [Ex iaDa]IIIC X, [ExiaMa] IX)
	KC National Radio Research Agency	Article 58-2, Clause 3	MSIP- REM-W43- AIM750
	UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 61010-2-201	E175199
	UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	-	E175199

Declarations of conformity and manufacturer's declarations

Logo	Approval	Additional Approval Text	Certificate name
	EU-Ex-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Approvals for marine applications

Logo	Approval	Additional Approval Text	Certificate name
	DNV DNV GL SE	DNV-CG-0339,Aug.2021	TAA0000194
	KR Korean Register of Shipping	-	KR HMB05880- AC001

Approvals for hazardous areas

Logo	Approval	Additional Approval Text	Certificate name
	ATEX TUEV Nord Cert GmbH	EN 60079-0	TUEV_12_ATEX_106032X (Ex ec[iaGa] IIC T4 Gc, [Ex iaDa] IIIC, [Ex iaMa] I)
	CCC CNEX	CNCA-C23-01	2020312310000211 (Ex ec[iaGa] IIC T4 Gc, [Ex

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastra. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

iaDa] IIIC, [Ex iaMa] I)

INMETRO	-	iaDa] IIIC, [Ex iaMa] I)
TÜV Rheinland do Brasil Ltda.		
KTL	KOSHA Article 34, IEC60079-0	21-KA4BO-0605X
TUEV Nord	IEC 60079	IECEx TUN 12.0039X (Ex ec[iaGa] IIC T4 Gc, [Ex iaDa] IIIC, [Ex iaMa] I)
TUEV Nord Cert GmbH		
UL	UL 121201	E198726 Sec.1
Underwriters Laboratories Inc. (HAZARDOUS LOCATIONS)		

Optional accessories

Supply module

Supply module		

Item no.: 750-625/000-001
Power Supply; 24 VDC; Intrinsically safe www.wago.com/750-625/000-001

Item no.: 750-606 Power Supply; 24 VDC; Diagnostics; Intrinsically safe	www.wago.com/750-606
---	--

Carrier rail

Mounting accessories		
Item no.: 210-197 Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored	www.wago.com/210-197	
Item no.: 210-198 Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored	www.wago.com/210-198	
Item no.: 210-504 Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715; silver-colored	www.wago.com/210-504	
Item no.: 210-505 Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715; silver-colored	www.wago.com/210-505	
Item no.: 210-506 Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715; silver-colored	www.wago.com/210-506	
Item no.: 210-508 Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715; silver-colored	www.wago.com/210-508	
Item no.: 210-113 Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored	www.wago.com/210-113	

Subject to changes. Please also observe the further product documentation!

Item no.: 210-118 www.wago.com/210-118
 Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

Item no.: 210-112 www.wago.com/210-112
 Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm"; www.wago.com/210-112
 silver-colored

Item no.: 210-114 www.wago.com/210-114
 Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored

Item no.: 210-115 www.wago.com/210-115
 Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm"; www.wago.com/210-115
 silver-colored

Item no.: 210-196 www.wago.com/210-196
 Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored

Shield termination

Shield clamping saddles

Item no.: 790-116 www.wago.com/790-116
 Shield clamping saddle; 19 mm wide; diameter of compatible conductor; 7 ... 16 mm

Item no.: 790-124 www.wago.com/790-124
 Shield clamping saddle; 27 mm wide; diameter of compatible conductor; 6 ... 24 mm

Item no.: 790-108 www.wago.com/790-108
 Shield clamping saddle; 11 mm wide; diameter of compatible conductor; 3 ... 8 mm

Item no.: 790-140 www.wago.com/790-140
 Shield clamping saddle; diameter of compatible conductor

Item no.: 790-216 www.wago.com/790-216
 Shield clamping saddle; 21.8 mm wide; 6 ... 16 mm

Item no.: 790-220 www.wago.com/790-220
 Shield clamping saddle; 30 mm wide; 6 ... 20 mm

Item no.: 790-208 www.wago.com/790-208
 Shield clamping saddle; 12.4 mm wide; 3 ... 8 mm

Marking accessories

Marker carrier

Item no.: 750-103 www.wago.com/750-103
 Group marker carrier

Marker

Item no.: 2009-145/000-006 www.wago.com/2009-145
 Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue [/000-006](http://www.wago.com/2009-145)

Item no.: 2009-145 www.wago.com/2009-145
 Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

Subject to changes. Please also observe the further product documentation!

Item no.: 2009-145/000-002

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

www.wago.com/2009-145/000-002

Item no.: 2009-145/000-007

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray

www.wago.com/2009-145/000-007

Item no.: 2009-145/000-005

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red

www.wago.com/2009-145/000-005

Item no.: 2009-145/000-012

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange

www.wago.com/2009-145/000-012

Item no.: 2009-145/000-023

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green

www.wago.com/2009-145/000-023

Item no.: 2009-145/000-024

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet

www.wago.com/2009-145/000-024

Item no.: 248-501/000-006

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue

www.wago.com/248-501/000-006

Item no.: 248-501/000-007

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray

www.wago.com/248-501/000-007

Item no.: 248-501/000-002

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow

www.wago.com/248-501/000-002

Item no.: 248-501/000-012

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange

www.wago.com/248-501/000-012

Item no.: 248-501

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white

www.wago.com/248-501

Item no.: 248-501/000-017

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green

www.wago.com/248-501/000-017

Item no.: 248-501/000-005

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red

www.wago.com/248-501/000-005

Subject to changes. Please also observe the further product documentation!

Item no.: 248-501/000-024

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet

www.wago.com/248-501/000-024

Item no.: 248-501/000-023

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green

www.wago.com/248-501/000-023

Group marker carrier

Item no.: 750-107

Group marker carrier

www.wago.com/750-107

Downloads

Documentation

Data sheet

750-489, 4AI RTD/TC/Strain Gauge Ex i

pdf
206.8 kB

[Download](#)

Manual

System Manual WAGO I/O System 750/753

V 3.3.3

pdf
8.7 MB

[Download](#)

Decentralized Automation Technology

2023 年8月29 日

Product Manual 4AI RTD/TC/Strain Gauge Ex i

V 1.2.0

pdf
6.6 MB

[Download](#)

4-Channel Analog Input; RTD/TC/Strain Gauge; Intrinsically safe

2021 年9月13 日

Bid Text

750-489

docx
17.6 kB

[Download](#)

doc - Datei

750-489

xml
9.2 kB

[Download](#)

X81 - Datei

Instruction Leaflet

CCC Ex (Additional information)

2023 年4月26 日

pdf
147.4 kB

[Download](#)

WAGO-I/O-SYSTEM 750-*** Ex i

System Description

Overview on WAGO-I/O-SYSTEM 750 approvals

pdf
223.5 kB

[Download](#)

Ex i Overview

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastra. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

pdf
233.9 kB

[Download](#)

750/753 Series I/O-System – General Product Information

pdf
976.2 kB

[Download](#)

Additional Information

Disposal and Recycling

V 1.1.0

pdf

Electrical and electronic equipment, Batteries, Packaging

2022 年8月18日

2.2 MB

[Download](#)

CAD/CAE-Data

CAD data

2D/3D Models 750-489

URL

[Download](#)

CAE data

ZUKEN Portal 750-489

URL

[Download](#)

EPLAN Data Portal 750-489

URL

[Download](#)

Installation Notes

Product family

WAGO I/O System 750/753

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastra. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.