
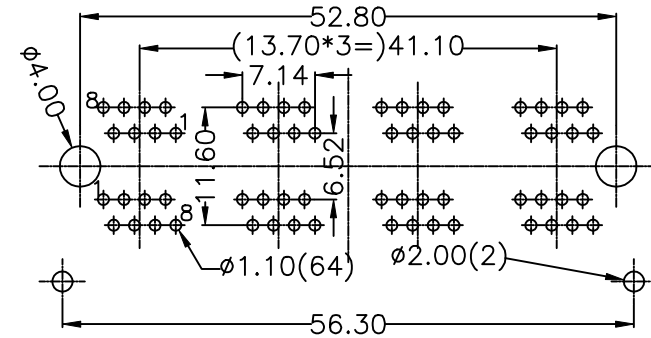
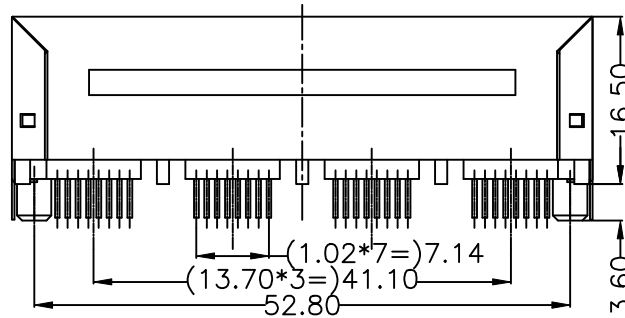
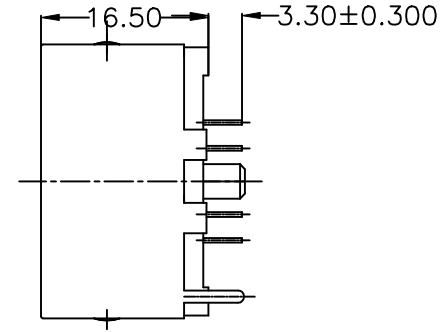


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
△		NOTES MODIFY	Among 10/22/04	

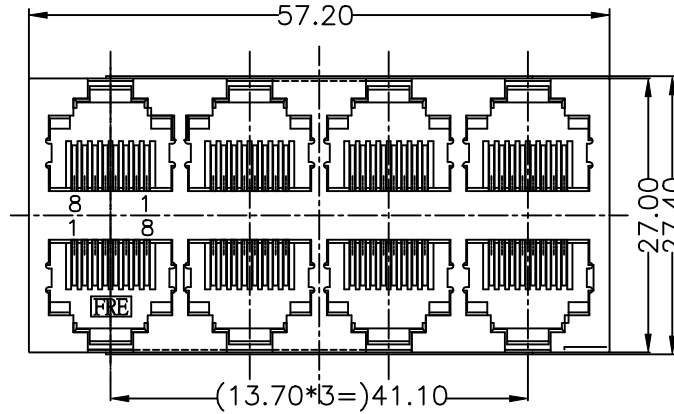

**NOTES:**

**ELECTRICAL:**

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

**MECHANICAL:**

1. HOUSING MATERIAL : PBT+30%
2. CONTACT MATERIAL : PHOSPHOR BRONZE  $\phi$ .46mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

**ENVIRONMENTAL:**

1. STORAGE : -40°C TO +85°C.
2. OPERATION: -40°C TO +85°C.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER: E5288-YXCBOX

1- 3U"	2- 6U"
3- 15U"	4- 30U"
5- 50U"	
N- W/O LOGO	
C- W/ FRE LOGO	

DETACHED LISTS	MM (INCH)	DFTO CZH	DATE 1/31/02'	FULL RISE ELECTRONIC CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
	MM	MFO	DATE	TITLE 2X4 TOP ENTRY PCB JACK	
	.0 ±0.20 ±	APPL	DATE		
.00 ±0.15 ±	MATERIAL :	DRAWING NO. GE523013		SIZE A3	REV 1
.000 ±0.075 ±	ANGLES ±	QTY :	/PART NO. SEE NOTE		
THIRD ANGLE PROJECTION	FINISH :	SCALE : 2:1	DO NOT SCALE DRAWING		SHEET X OF Y