

Ŧ	G	нт. П	m	0



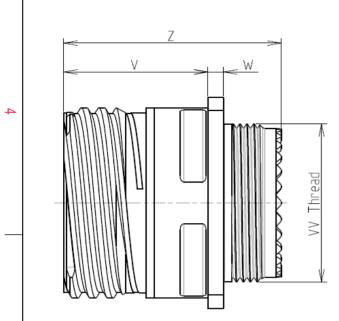

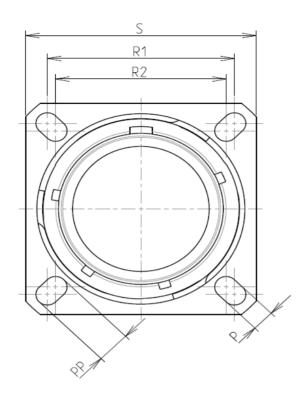

LAYOUT SHOWN AS

Keying Shown as example

Connector dimension

Nominal

ORIENTATION : E

CONTACT LAYOUT : 11-01

CONTACT TYPE : SOCKET(500 Matings)

Е

Dim

CHARACTERISTICS

ယ

-Standard : Based on MIL-DTL-38999 Series III

CONTACT TYPE : Standard Crimp Contact

SHELL SIZE : 11

PLATING : S = Nickel


Н

	-Stanuaru - Daseu on r			
\triangleleft		: Stainless Steel	Р	3.25±0.2
Γ			PP	4.93±0.2
	-Shell Plating	: Nickel	R1	20.62
	-Insulator	: Thermoplastic	R2	18.26
	-Contacts	: Copper Alloy	S	26.2±0.3
			V	20.83+0/-1.25
	-Seals & Grommet	: Silicon Elastomer	W	2.1/2.5
N	-Contact Plating	: Gold over copper Alloy 0.8µm minimum	Z	31.5 Max
	-Durability	: 500 Mating cycles	VV THREAD	M15x1-6g
	-Delivered without So			
	-Temperature Range	: -65°C to +200°C		
	-Salt Spray	: 500 hours		
_	-Mass	: 30.87 g ± 10%		
	BASIC SERIES:	8D 0 - 11 S 01 S E	L	
				Delivered W/O Contacto
-	SHELL TYPE : Square			Delivered W/O Contacts

G

F

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

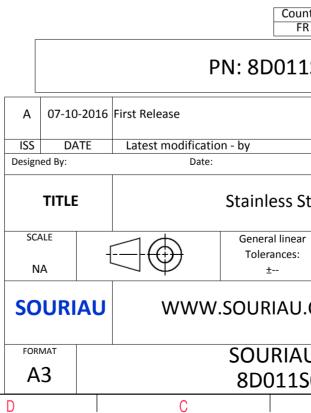

Β		A		_
				4
AS EXAMPLE				3
any non-conformit which does not co or of the Parties or k adation, technical n untry Jurisd R 1SO1SEL	mply with by a third part			2
	CUSTOMER		MOD N°	
Steel Receptacle 8D series				
ar	NPRDS / 85	PROJECT 59		1
This document is the property of SOURIAU it must not be reproduced or communicated without permission				
U DRG N° S01SEL-C			SHEET 1/2	
B		А		J

	T	۵	г п	m	D	0
		Contact Layout				Panel Cuto
4		01			Å	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc	1#12 11-01 X Y	-		₩ ₩	ØT.
ω	A	0 0]			Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for an due to a use of the Products w the Specifications issued by either o (professional recommenda
N						Count FR PN: 8D011
_					A 07-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
_					SCALE NA	Stainless St General linear Tolerances: ±
					FORMAT	J WWW.SOURIAU.G
					A3	8D011S
	Н	G	l F	E	D	C

