




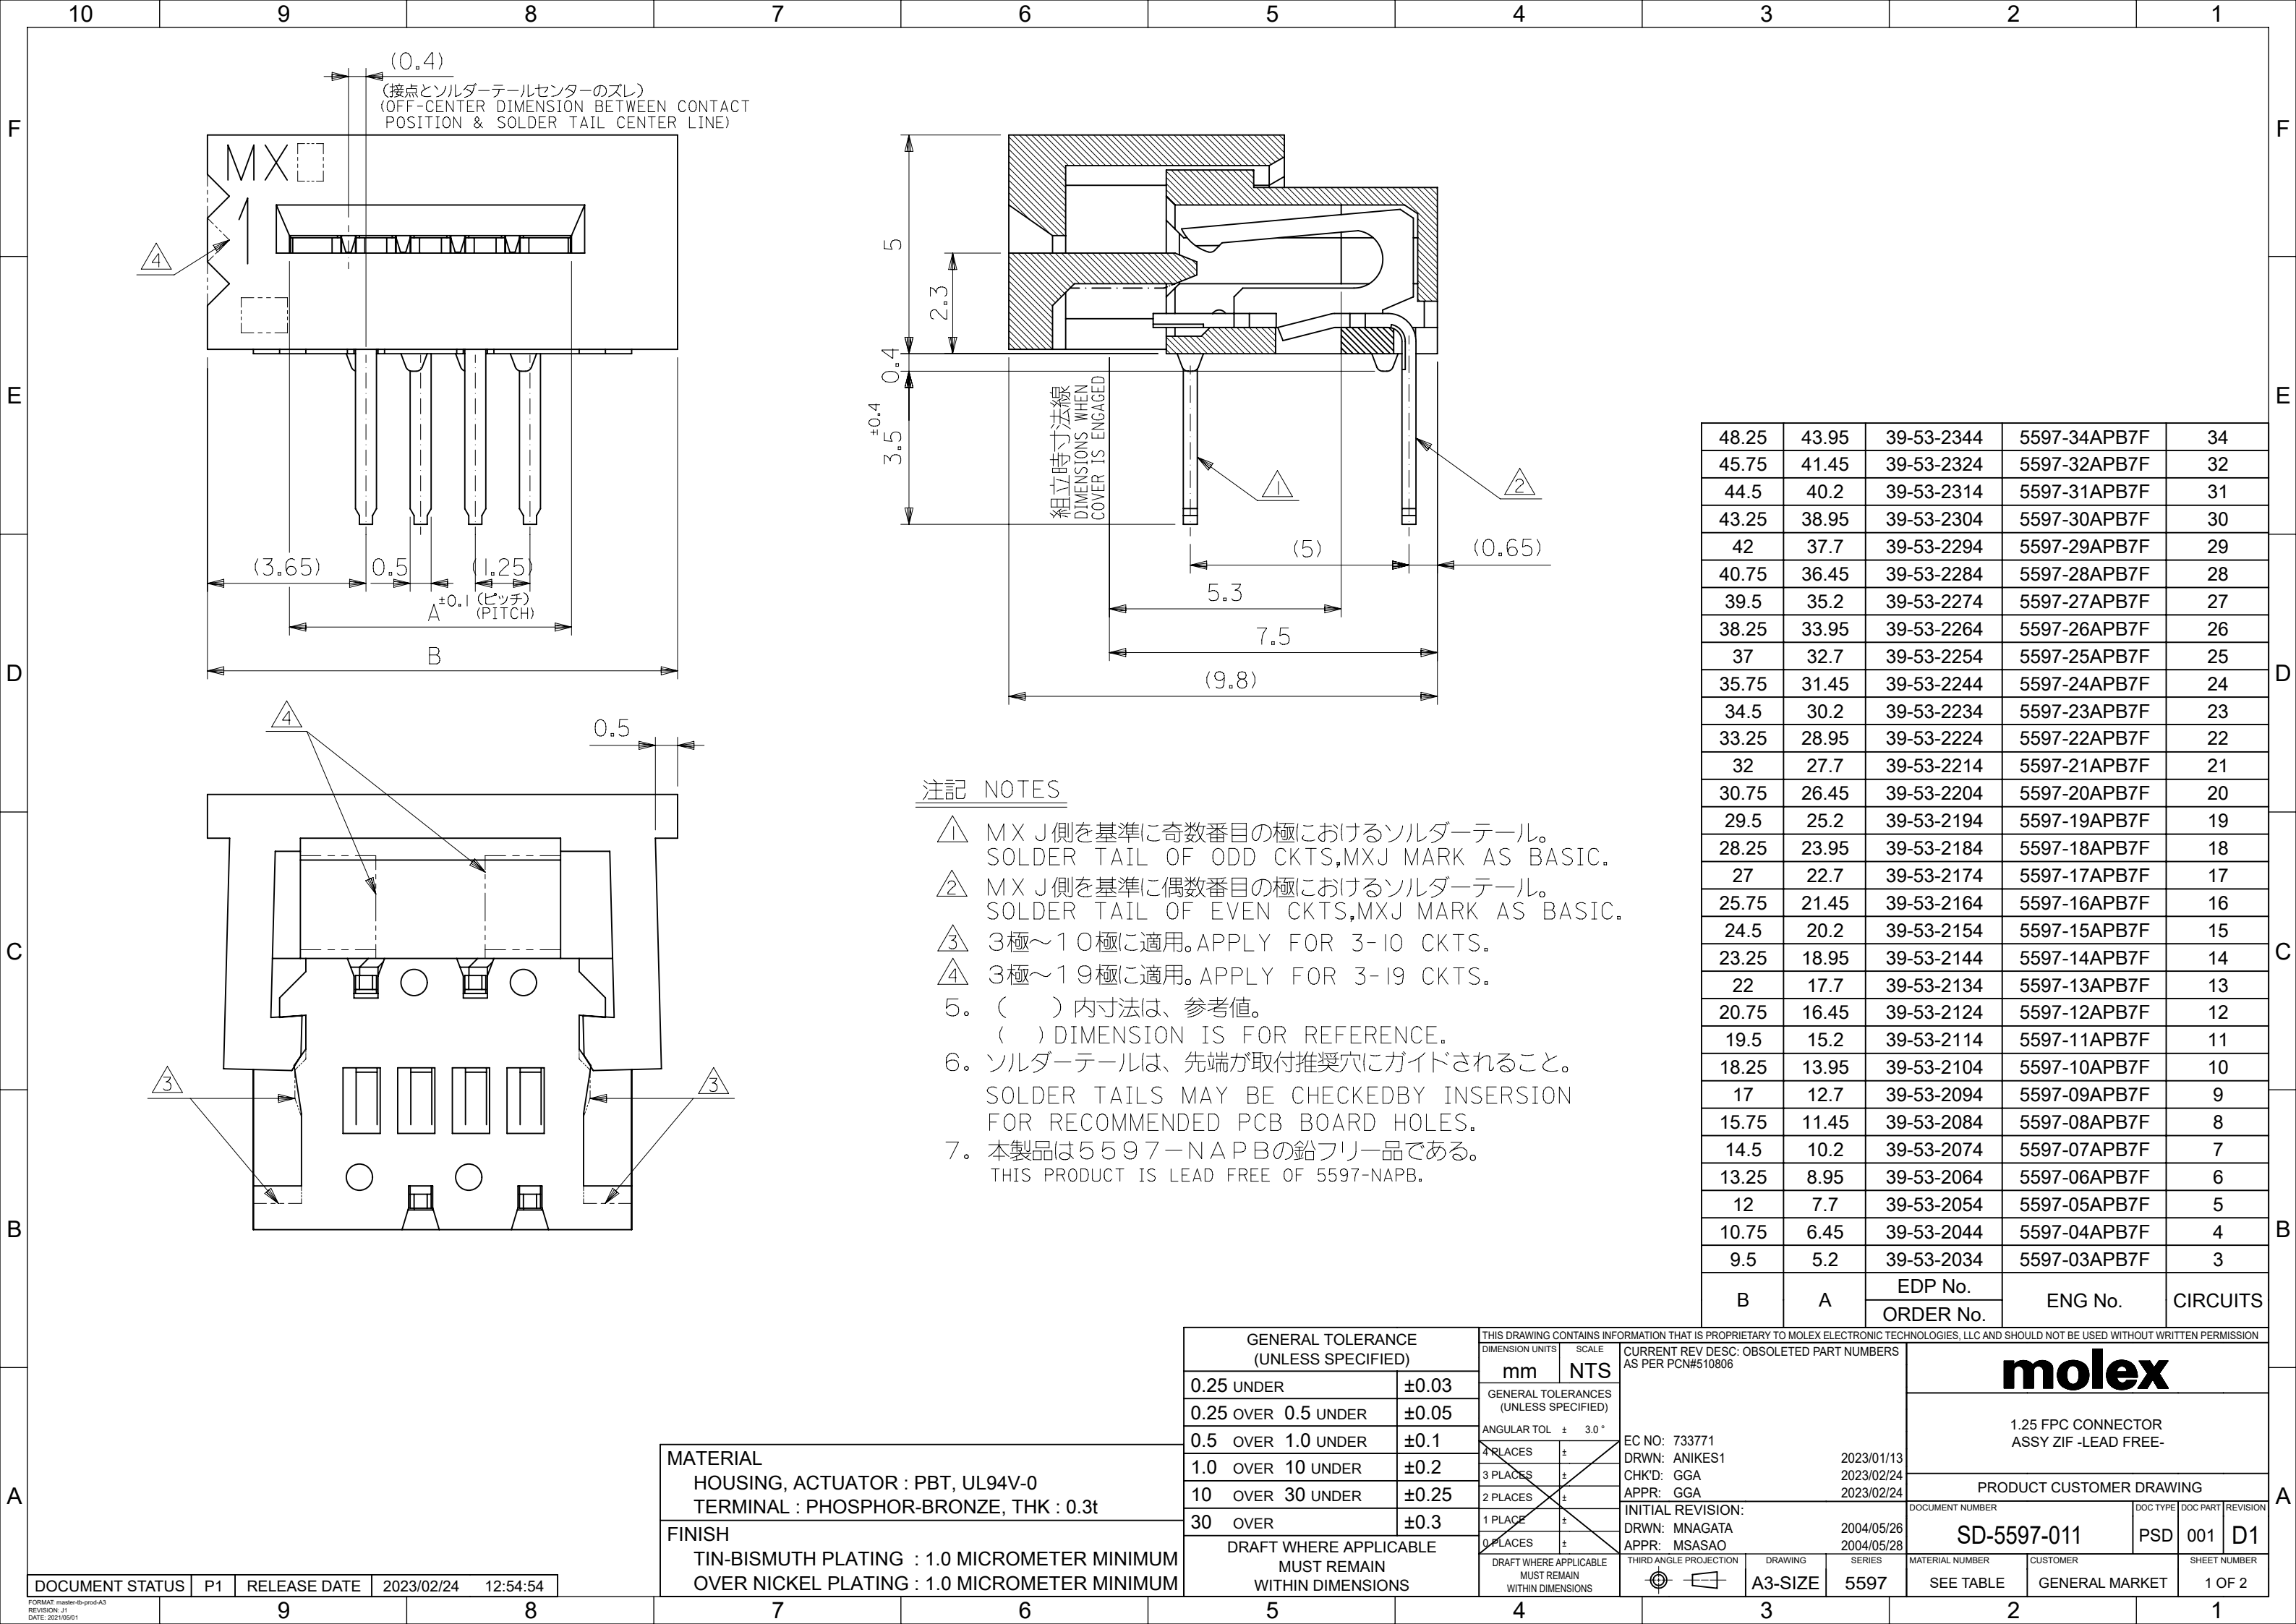

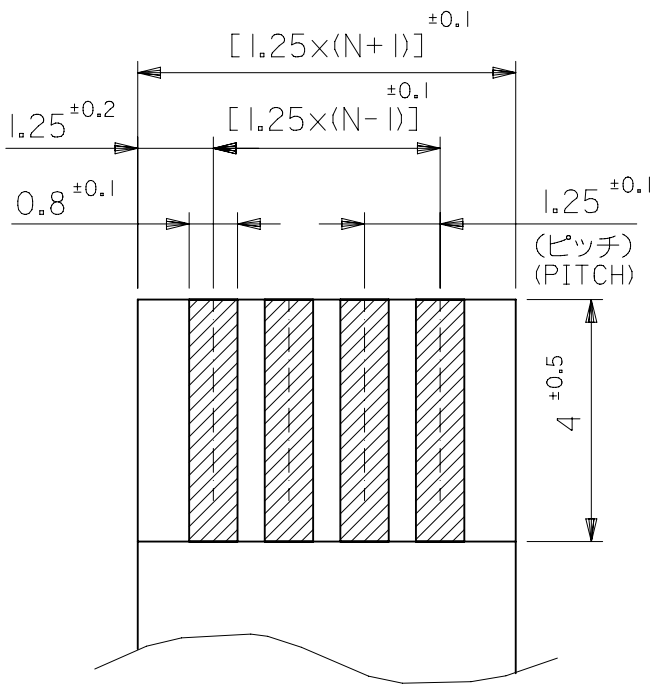

適合FPC/FFC推奨寸法
RECOMMENDED FPC/FFC
厚さ THK : 0.3 ±0.05

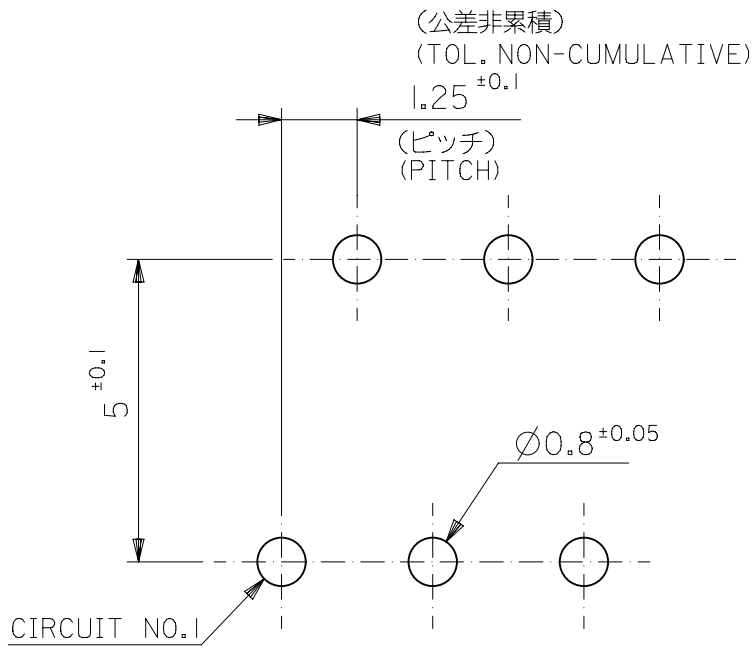

FPC/FFCについて:

打抜き方向は導体側から補強板側を推奨いたします。
導体部については軟銅箔35マイクロメートルまたは50マイクロメートルを推奨いたします。

ABOUT FPC/FFC
RECOMMENDED PUNCHER DIRECTION : FROM CONDUCTOR SIDE TO STIFFENER FILM SIDE.
RECOMMENDED CONDUCTOR SPEC :
THICKNESS OF SOFT COPPER FOIL : 35 MICROMETER OR 50 MICROMETER.

FPCについて:

補強フィルム材質はポリイミドを推奨します。
接着剤は熱硬化接着剤を推奨します。

ABOUT FPC
RECOMMENDED MATERIAL :
STIFFENER FILM : POLYIMIDE
BONDING AGENT : THERMOSETTING BONDING AGENT

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
DIMENSION UNITS		SCALE	CURRENT REV DESC: OBSOLETE PART NUMBERS AS PER PCN#510806				molex 1.25 FPC CONNECTOR ASSY ZIF -LEAD FREE-				
mm		NTS									
GENERAL TOLERANCES (UNLESS SPECIFIED)			EC NO: 733771 DRWN: ANIKES1 CHK'D: GGA APPR: GGA 2023/01/13 2023/02/24 2023/02/24 PRODUCT CUSTOMER DRAWING								
ANGULAR TOL ± 3.0°											
4 PLACES		±									
3 PLACES		±									
2 PLACES		±									
1 PLACE		±	INITIAL REVISION: DRWN: MNAGATA APPR: MSASAO 2004/05/26 2004/05/28				DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
0 PLACES		±					SD-5597-011		PSD	001	D1
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER		CUSTOMER		SHEET NUMBER
					A3-SIZE	5597	SEE TABLE		GENERAL MARKET		2 OF 2