


Datasheet revision 1.0

www.Proto-Advantage.com

## SOIC-16 to DIP-16 SMT Adapter (150 mil / 200 mil body)

| DIMENSIONS |      |      |      |        |       |      |
|------------|------|------|------|--------|-------|------|
| REF.       | mm   |      |      | inches |       |      |
|            | MIN. | TYP. | MAX. | MIN.   | TYP.  | MAX. |
| Α          |      | 2.90 |      |        |       |      |
| В          |      | 2.50 |      |        |       |      |
| С          |      | 0.60 |      |        |       |      |
| D          |      | 0.67 |      |        |       |      |
| Е          |      | 1.27 |      |        |       |      |
| F          |      |      |      |        | 0.300 |      |
| G          |      |      |      |        | 0.100 |      |
| Н          |      |      |      |        | 0.025 |      |


**Top View (SMT Footprint)** 

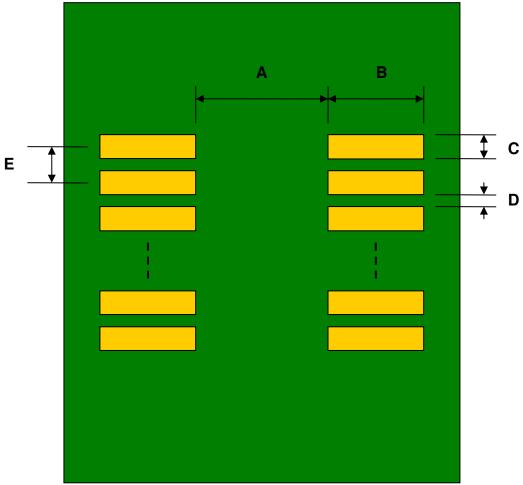

(Representative drawing only - not to scale)




## **Bottom View (DIP Pins)**

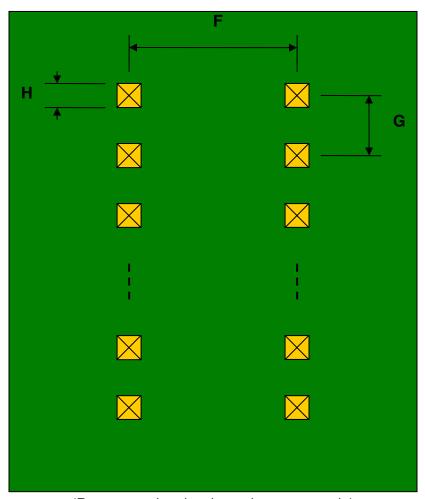

(Representative drawing only - not to scale)

## Side View (DIP Pins)

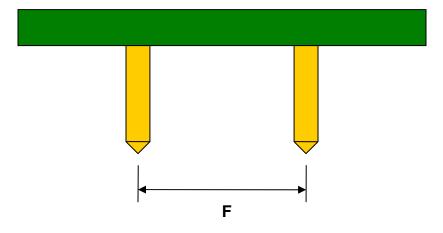

(Representative drawing only - not to scale)

