

NOTES

- ターミナル及びネイル平坦度は 0.1 MAX.
TERMINAL AND NAIL COPLANARITY TO BE 0.1 MAX.
-

| カード装着状態 CARD INSERTION STATE | プロテクトスイッチ PROTECT SWITCH | | ディテクトスイッチ DETECT SWITCH |
|---------------------------------|-----------------------------|--------------------------|----------------------------|
| | 書き込み禁止状態 READ-ONLY | 書き込み可能状態 WRITE ENABLE | |
| カード未装着 CARD UNINSERTION | クローズ CLOSE | クローズ CLOSE | クローズ CLOSE |
| カード装着 CARD INSERTION | クローズ CLOSE | オープン OPEN | オープン OPEN |

| | |
|--|---|
| 54768-0901 | 9 |
| 製品番号 MATERIAL NO. | 極数 CIRCUIT |
| DIMENSIONS: | |
| <input type="checkbox"/> mm <input type="checkbox"/> INCH | <input type="checkbox"/> SHT <input type="checkbox"/> REV |
| <input checked="" type="checkbox"/> mm ONLY <input type="checkbox"/> INCH ONLY | |
| REVISE ON CAD ONLY | |

| | | | | | | | | | | | | | | | | | | |
|----------------------------------|----------------------------------|----------------------------------|----------------------------------|---|----------|----------------------|-------------------|---|----------------|--|---------------------------|---|-----------------------------|-------------------|--------|--|--|--|
| EC NO. DRWN: CHK: APPR: | EC NO. DRWN: CHK: APPR: | EC NO. DRWN: CHK: APPR: | EC NO. DRWN: CHK: APPR: | EC No. J02001-0646 DRWN: S. MARUYAMA 000/11/02 CHK: M. SASAO 000/11/02 APPR: H. KESUGI 000/11/02 | RELEASED | MATERIAL 材料 | 表記参照 SEE CHART | GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差 | SCALE 2 - 1 | DESIGN UNITS <input checked="" type="checkbox"/> mm <input type="checkbox"/> INCH | THIRD ANGLE PROJECTION | TITLE: SD MEMORY CARD CONN. EJECT MECHANISM FOR PUSH/PUSH ASS'Y (REVERSE TYPE) | MATERIAL NO. DRAWING NO. | SHEET NO. SIZE | | | | |
| | | | | 0 | REV | FINISH 仕上げ | 表記参照 SEE CHART | 10 UNDER 未満 | +0.2 | DRAWN BY & DATE S. Maruyama 2000/05/31 | | MOLEX INCORPORATED | 54768006.S01 | SD-54768-006 | 1 OF 2 | | | |
| | | | | | | WIRE RANGE 通所線線範囲 | | 10 OVER 以上 | +0.25 | CHECKED BY & DATE H. Sano 2000/05/31 | | | | | | | | |
| | | | | | | INS. RANGE 被覆外径 | | 30 OVER 以上 | +0.3 | APPROVED BY & DATE S. Maruyama 2000/05/31 | | | | | | | | |
| | | | | | | | | ANGLE 角度 | +3° | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION. | | | | | | | | |

DWG. NO. SD-54768-006

F


D

V

C

B

DO NOT SCALE DRAWING

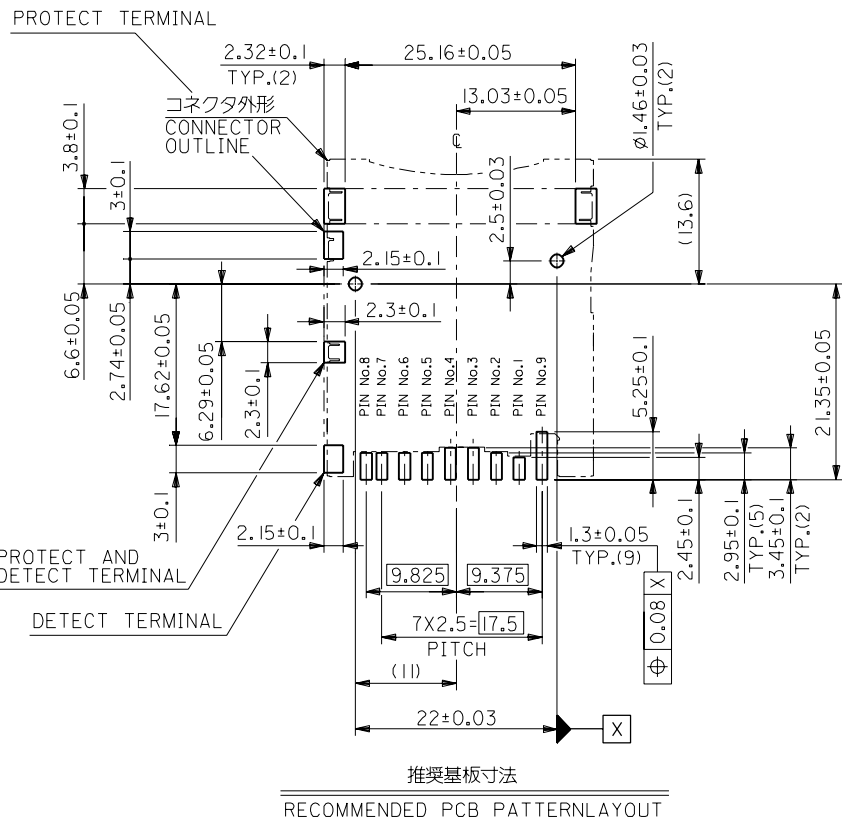

推奨基板寸法
RECOMMENDED PCB PATTERN LAYOUT

| | | | | |
|-----|---|-----|--|----------------------------------|
| ⑩ | ネイル NAIL | 2 | 銅合金 COPPER ALLOY | 半田メッキ Sn-Pb PLATING |
| ⑨ | ディテクトターミナル DETECT TERMINAL | 1 | 銅合金 COPPER ALLOY | 接点部:金メッキ SELECTIVE Au PLATING |
| ⑧ | プロテクト & ディテクトターミナル PROTECT AND DETECT TERMINAL | 1 | 銅合金 COPPER ALLOY | 接点部:金メッキ SELECTIVE Au PLATING |
| ⑦ | プロテクトターミナル PROTECT TERMINAL | 1 | 銅合金 COPPER ALLOY | 接点部:金メッキ SELECTIVE Au PLATING |
| ⑥ | スプリング SPRING | 1 | ピアノ線 SWP | — |
| ⑤ | ピン PIN | 1 | ステンレス鋼 STAINLESS STEEL | — |
| ④ | 金属カバー METAL COVER | 1 | ステンレス鋼 STAINLESS STEEL | — |
| ③ | ターミナル TERMINAL | 9 | 銅合金 COPPER ALLOY | 接点部:金メッキ SELECTIVE Au PLATING |
| ② | スライダーカム SLIDER CAM | 1 | 耐熱樹脂, UL94V-0 色:黒 HEAT RESISTANCE POLYMER UL94V-0, BLACK | — |
| ① | ハウジング HOUSING | 1 | 耐熱樹脂, UL94V-0 色:黒 HEAT RESISTANCE POLYMER UL94V-0, BLACK | — |
| NO. | PARTS | QTY | MATERIAL | FINISHE |

F

E

D

C

B

A

| | | | |
|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| EC NO. DRAWN: CHK: APPR: | EC NO. DRAWN: CHK: APPR: | EC NO. DRAWN: CHK: APPR: | EC NO. DRAWN: CHK: APPR: |
|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|

RELEASED
EC NO. J02001-0646
DRAWN: S. MARUYAMA 000/1/02
CHK: M. SASAO 000/1/02
APPR: H. IKESUGI 000/1/02

| | |
|----------------------|-------------------|
| MATERIAL 材料 | 表記参照 SEE CHART |
| FINISH 仕上げ | 表記参照 SEE CHART |
| WIRE RANGE 適用線径範囲 | — |
| INS. RANGE 被覆外径 | — |

| | | | | |
|---|--|--|--|---------------------------|
| GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差 | SCALE 2 - 1 <input checked="" type="checkbox"/> mm <input type="checkbox"/> INCH | DESIGN UNITS <input checked="" type="checkbox"/> mm <input type="checkbox"/> INCH | THIRD ANGLE PROJECTION <input type="checkbox"/> mm <input type="checkbox"/> INCH <input checked="" type="checkbox"/> mm ONLY | SHT REV |
| 10 UNDER 未満 | +0.2 | DRAWN BY & DATE S. Maruyama 2000/05/31 | TITLE: SD MEMORY CARD CONN. EJECT MECHANISM FOR PUSH/PUSH ASS'Y (REVERSE TYPE) | REVISE ON CAD ONLY |
| 10 OVER 以上 30 UNDER 未満 | +0.25 | CHECKED BY & DATE H. Sasao 2000/05/31 | MOLEX INCORPORATED | |
| 30 OVER 以上 | +0.3 | APPROVED BY & DATE S. Maruyama 2000/05/31 | CAD FILENAME 54768006.S02 | MATERIAL NO. SEE CHART |
| ANGLE 角度 | +3° | | DRAWING NO. SD-54768-006 | SHEET NO. 2 |

| | | |
|--|--|-----------|
| THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION. | | SIZE B |
|--|--|-----------|

54768006.S02