



MMBZ5221BW~MMBZ5262BW

SURFACE MOUNT SILICON ZENER DIODES

VOLTAGE 2.4 to 51 Volts **POWER** 200 mWatts


SOT-323 Unit : inch(mm)

FEATURES

- Planar Die construction
- 200mW Power Dissipation
- Zener Voltages from 2.4V~51V
- Ideally Suited for Automated Assembly Processes
- In compliance with EU RoHS 2002/95/EC directives

MECHANICAL DATA

- Case: SOT-323, Plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- Apprx. Weight: 0.0001 ounces, 0.005 grams

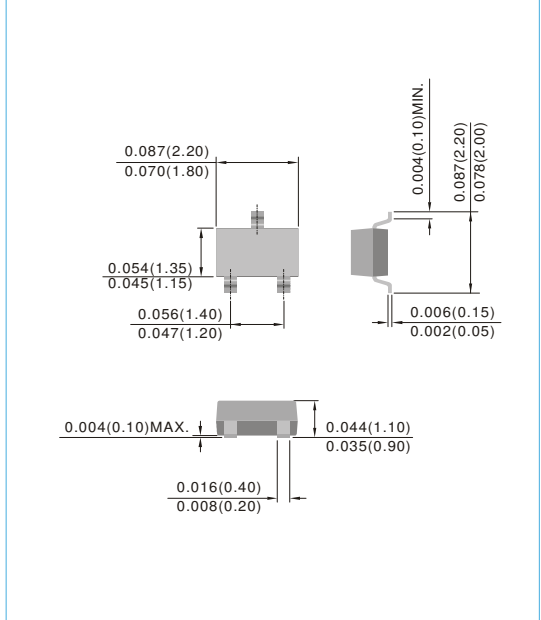


MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

| PARAMETER | SYMBOL | VALUE | UNITS |
|--|--------|-------------|------------------|
| Power Dissipation @ $T_A=25^\circ\text{C}$ (Note 1) | P_D | 200 | mW |
| Operating Junction Temperature and Storage Temperature Range | T_J | -55 to +150 | $^\circ\text{C}$ |

NOTES:

1. Mounted on 100cm²(1mm thick) copper areas.





MMBZ5221BW~MMBZ5262BW

| Part Number | Nominal Zener Voltage | | | Max. Zener Impedance | | | | Max Reverse Leakage Current | | Marking Code |
|-------------------------|----------------------------------|--------|--------|-----------------------------------|------|-----------------------------------|------|---------------------------------|------|--------------|
| | V _Z @ I _{ZT} | | | Z _{TT} @ I _{ZT} | | Z _{ZK} @ I _{ZK} | | I _R @ V _R | | |
| | Nom. V | Min. V | Max. V | Ω | mA | Ω | mA | μA | V | |
| 200 mWatts Zener Diodes | | | | | | | | | | |
| MMBZ5221BW | 2.4 | 2.28 | 2.52 | 30 | 20.0 | 1200 | 0.25 | 100 | 1.0 | C1 |
| MMBZ5222BW | 2.5 | 2.38 | 2.63 | 30 | 20.0 | 1250 | 0.25 | 100 | 1.0 | C2 |
| MMBZ5223BW | 2.7 | 2.57 | 2.84 | 30 | 20.0 | 1300 | 0.25 | 75 | 1.0 | C3 |
| MMBZ5224BW | 2.8 | 2.66 | 2.94 | 30 | 20 | 1400 | 0.25 | 75 | 1.0 | C4 |
| MMBZ5225BW | 3.0 | 2.85 | 3.15 | 30 | 20.0 | 1600 | 0.25 | 50 | 1.0 | C5 |
| MMBZ5226BW | 3.3 | 3.14 | 3.47 | 28 | 20.0 | 1600 | 0.25 | 25 | 1.0 | D1 |
| MMBZ5227BW | 3.6 | 3.42 | 3.78 | 24 | 20.0 | 1700 | 0.25 | 15 | 1.0 | D2 |
| MMBZ5228BW | 3.9 | 3.71 | 4.10 | 23 | 20.0 | 1900 | 0.25 | 10 | 1.0 | D3 |
| MMBZ5229BW | 4.3 | 4.09 | 4.52 | 22 | 20.0 | 2000 | 0.25 | 5.0 | 1.0 | D4 |
| MMBZ5230BW | 4.7 | 4.47 | 4.94 | 19 | 20.0 | 1900 | 0.25 | 5.0 | 2.0 | D5 |
| MMBZ5231BW | 5.1 | 4.85 | 5.36 | 17 | 20.0 | 1600 | 0.25 | 5.0 | 2.0 | E1 |
| MMBZ5232BW | 5.6 | 5.32 | 5.88 | 11 | 20.0 | 1600 | 0.25 | 5.0 | 3.0 | E2 |
| MMBZ5233BW | 6.0 | 5.7 | 6.3 | 7.0 | 20 | 1600 | 0.25 | 5.0 | 3.5 | E3 |
| MMBZ5234BW | 6.2 | 5.89 | 6.51 | 7 | 20.0 | 1000 | 0.25 | 5.0 | 4.0 | E4 |
| MMBZ5235BW | 6.8 | 6.46 | 7.14 | 5 | 20.0 | 750 | 0.25 | 3.0 | 5.0 | E5 |
| MMBZ5236BW | 7.5 | 7.13 | 7.88 | 6 | 20.0 | 500 | 0.25 | 3.0 | 6.0 | F1 |
| MMBZ5237BW | 8.2 | 7.79 | 8.61 | 8 | 20.0 | 500 | 0.25 | 3.0 | 6.0 | F2 |
| MMBZ5238BW | 8.7 | 8.27 | 9.14 | 8 | 20.0 | 600 | 0.25 | 3.0 | 6.5 | F3 |
| MMBZ5239BW | 9.1 | 8.65 | 9.56 | 10 | 20.0 | 600 | 0.25 | 3.0 | 6.5 | F4 |
| MMBZ5240BW | 10 | 9.50 | 10.50 | 17 | 20.0 | 600 | 0.25 | 3.0 | 8.0 | F5 |
| MMBZ5241BW | 11 | 10.45 | 11.55 | 22 | 20.0 | 600 | 0.25 | 2.0 | 8.4 | H1 |
| MMBZ5242BW | 12 | 11.40 | 12.60 | 30 | 20.0 | 600 | 0.25 | 1.0 | 9.1 | H2 |
| MMBZ5243BW | 13 | 12.35 | 13.65 | 13 | 9.5 | 600 | 0.25 | 0.5 | 9.9 | H3 |
| MMBZ5244BW | 14 | 13.30 | 14.70 | 15 | 9.0 | 600 | 0.25 | 0.1 | 10.5 | H4 |
| MMBZ5245BW | 15 | 14.25 | 15.75 | 16 | 8.5 | 600 | 0.25 | 0.1 | 11 | H5 |
| MMBZ5246BW | 16 | 15.20 | 16.80 | 17 | 7.8 | 600 | 0.25 | 0.1 | 12 | J1 |
| MMBZ5247BW | 17 | 16.15 | 17.85 | 19 | 7.5 | 600 | 0.25 | 0.1 | 13 | J2 |
| MMBZ5248BW | 18 | 17.10 | 18.90 | 21 | 7.0 | 600 | 0.25 | 0.1 | 14 | J3 |
| MMBZ5249BW | 19 | 18.05 | 19.95 | 23 | 6.6 | 600 | 0.25 | 0.1 | 14 | J4 |
| MMBZ5250BW | 20 | 19.00 | 21.00 | 25 | 6.2 | 600 | 0.25 | 0.1 | 15 | J5 |
| MMBZ5251BW | 22 | 20.90 | 23.10 | 29 | 5.6 | 600 | 0.25 | 0.1 | 17 | K1 |
| MMBZ5252BW | 24 | 22.80 | 25.20 | 33 | 5.2 | 600 | 0.25 | 0.1 | 18 | K2 |
| MMBZ5253BW | 25 | 23.75 | 26.25 | 35 | 5.0 | 600 | 0.25 | 0.1 | 19 | K3 |
| MMBZ5254BW | 27 | 25.65 | 28.35 | 41 | 5.0 | 600 | 0.25 | 0.1 | 21 | K4 |
| MMBZ5255BW | 28 | 26.60 | 29.40 | 44 | 4.5 | 600 | 0.25 | 0.1 | 21 | K5 |
| MMBZ5256BW | 30 | 28.50 | 31.50 | 49 | 4.2 | 600 | 0.25 | 0.1 | 23 | M1 |
| MMBZ5257BW | 33 | 31.35 | 34.65 | 58 | 3.8 | 700 | 0.25 | 0.1 | 25 | M2 |
| MMBZ5258BW | 36 | 34.20 | 37.80 | 70 | 3.4 | 700 | 0.25 | 0.1 | 27 | M3 |
| MMBZ5259BW | 39 | 37.05 | 40.95 | 80 | 3.2 | 800 | 0.25 | 0.1 | 30 | M4 |
| MMBZ5260BW | 43 | 40.85 | 45.15 | 93 | 3.0 | 900 | 0.25 | 0.1 | 33 | M5 |
| MMBZ5261BW | 47 | 44.65 | 49.35 | 105 | 2.7 | 1000 | 0.25 | 0.1 | 36 | N1 |
| MMBZ5262BW | 51 | 48.45 | 53.55 | 125 | 2.5 | 1100 | 0.25 | 0.1 | 39 | N2 |



MMBZ5221BW~MMBZ5262BW

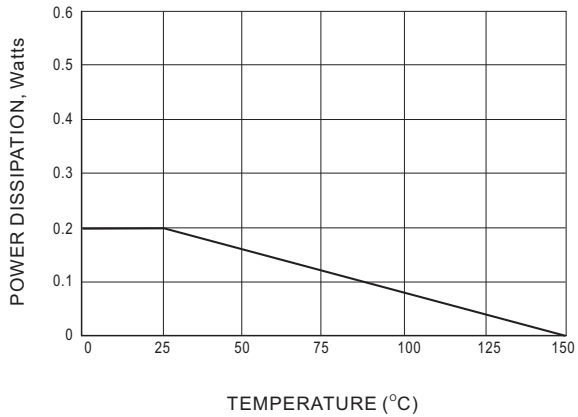


Fig.1 STEADY STATE POWER DERATING

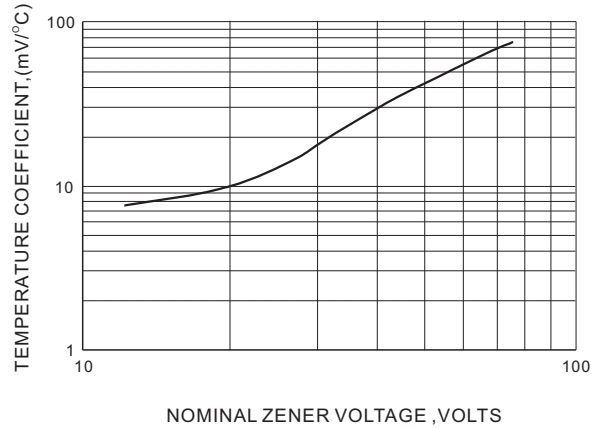


Fig.2 TEMPERATURE COEFFICIENTS

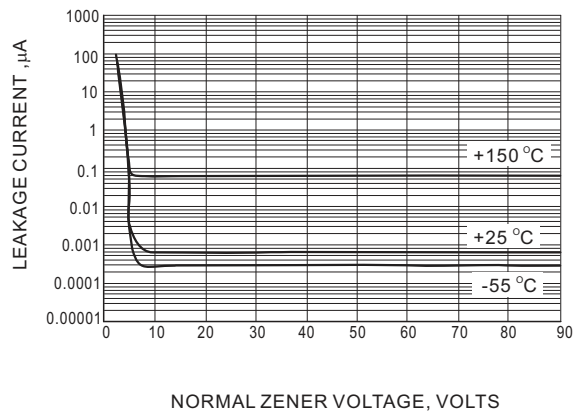


Fig.3 TYPICAL LEAKAGE CURRENT


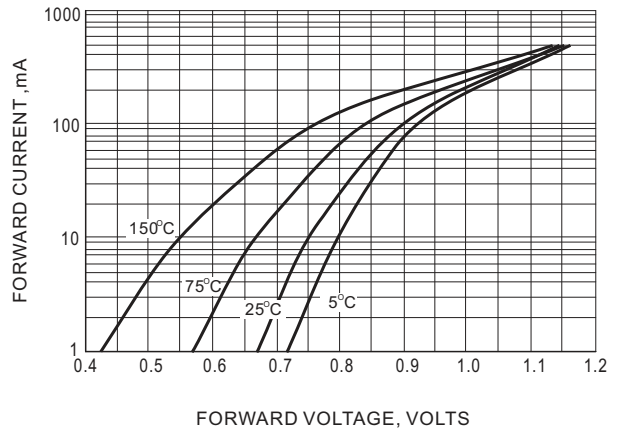


Fig.4 TYPICAL FORWARD VOLTAGE



MMBZ5221BW~MMBZ5262BW

MOUNTING PAD LAYOUT

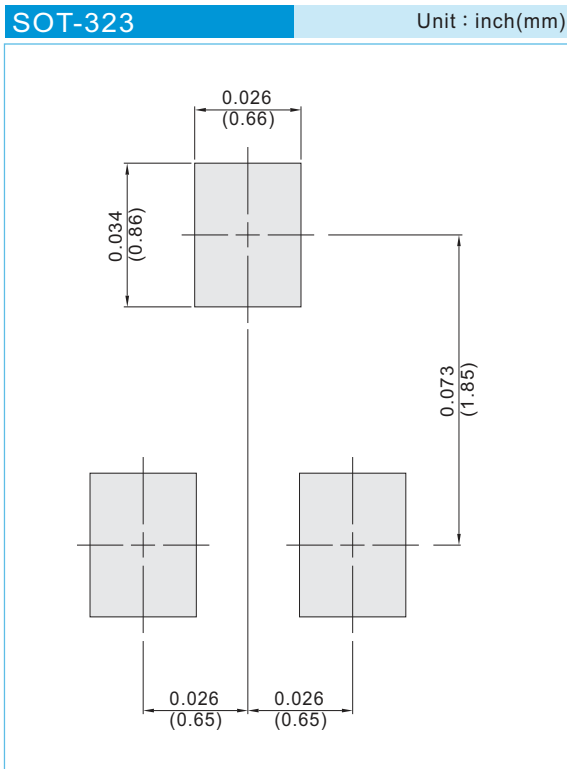

ORDER INFORMATION

- Packing information
 - T/R - 12K per 13" plastic Reel
 - T/R - 3K per 7" plastic Reel

LEGAL STATEMENT

Copyright PanJit International, Inc 2011

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.