


plating	part no.
GOLD FLASH over NICKEL	<b>131A13019X</b>
min. 20µin HARD GOLD over min. 50µin NICKEL	<b>131B13019X</b>
min. 30µin HARD GOLD over min. 50µin NICKEL	<b>131C13019X</b>

pos	qty	description	material	plating
3	1	RETAINING RING	COPPER ALLOY	NICKEL PLATED
2	1	MATING SIDE	COPPER ALLOY	see table
1	1	REAR SIDE	COPPER ALLOY	TIN PLATED

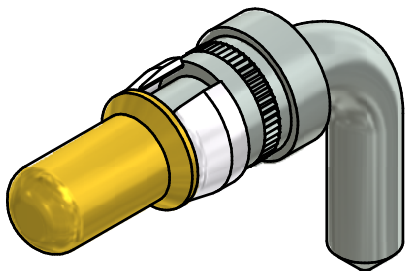

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND	partlist		tolerance		scale: 10:1	
			date	name	material: see partlist	
			drawn	23.03.98	Barcinski	<b>HIGH POWER CONTACT MALE</b> SOLDER PIN 90°, d=2,85mm, 20A D-SUB COMBINATION
			appd.	23.03.98	Mickenbecker	
			norm			
		d-old	SK21H04 / 13K21E0A		dwg no:	
1 x b	A4364	05.07.12	HS		13K11E0A	DIN-A3
a	Original					sh: 1
rev.	description	date	name		part no: see table	