


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	ECO #4085	04/20/01	J.H.

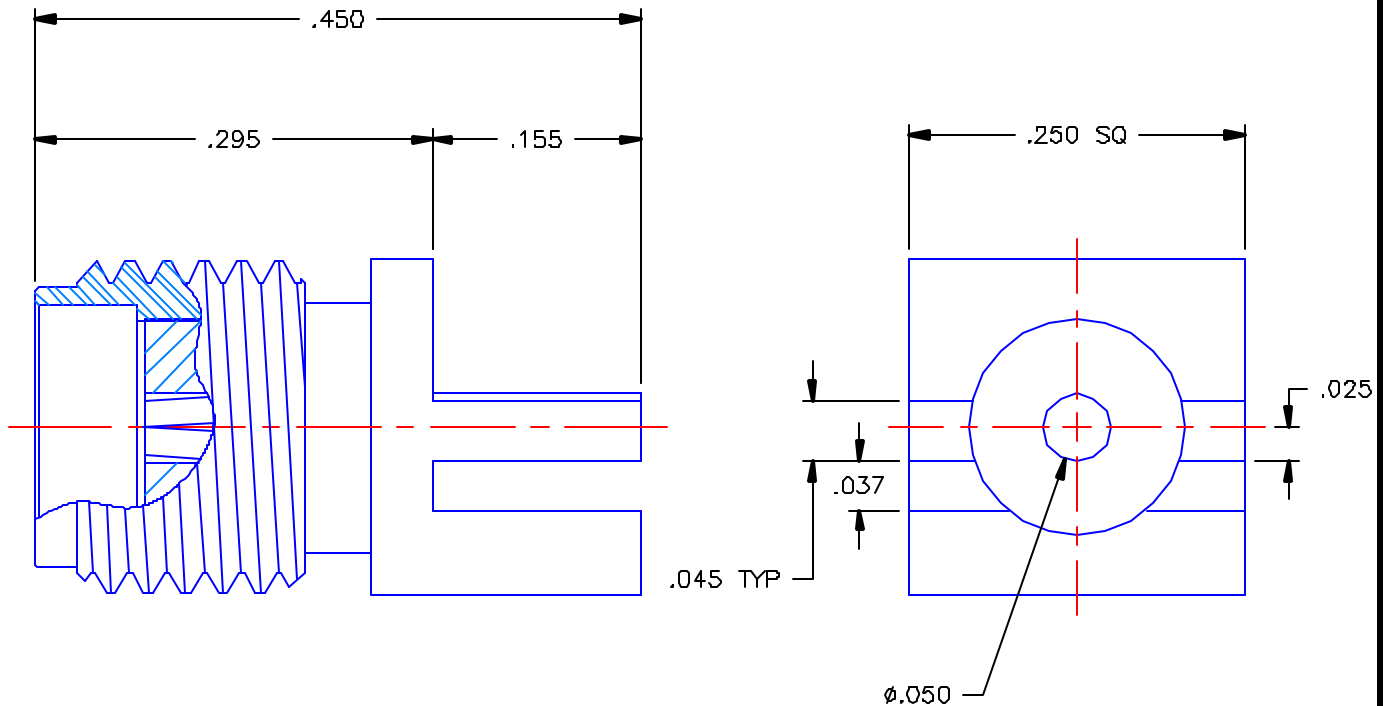

NOTES: CONFORMS TO MIL-PRF-39012 SMA SERIES

MATERIALS:

1. BODY = STAINLESS STEEL PER ASTM A582, ALLOY 303, CONDITION "A".
2. CONTACT = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.
3. INSULATOR = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "A"

FINISHES:

1. BODY = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 0, GRADE C, OVER .000050 TO .00010 STRESS FREE NICKEL PER QQ-N-290.
2. CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON		DWN: J.H.	DATE 04/19/01	 APPLIED ENGINEERING PRODUCTS 104 John W. Murphy Dr. New Haven, CT 06513
		CHKD: D.N.	DATE 04/20/01	
DECIMAL	ANGLE	APVD: D.J.C.	DATE 04/20/01	SMA STRAIGHT JACK EDGE MOUNT RECEPTACLE
REFERENCE:		MATERIAL & FINISHES:		
ORIGINATOR: D.N. DATE: 09/26/96		SEE NOTES		SIZE A
				FSCM NO. 19505
				DWG NO. 9650-1113-014
				REV A
		SCALE 7:1		CODE
				SHEET 1 OF 1

9650-1113-014