

MICRO SWITCH

a Honeywell Division

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

V3-507

CK-E8250

CATALOG LISTING

V3-507

M

ISSUE 2

REPLACES

RELEASE NO. PR-19058

CHECK

REVISIONS

A	CO	76441
	DCS	22 DEC 93

CHECK

8 MAR 91



WJC

CHECK

B A B 7 MAR 91

DRAWN


DDM/CAD

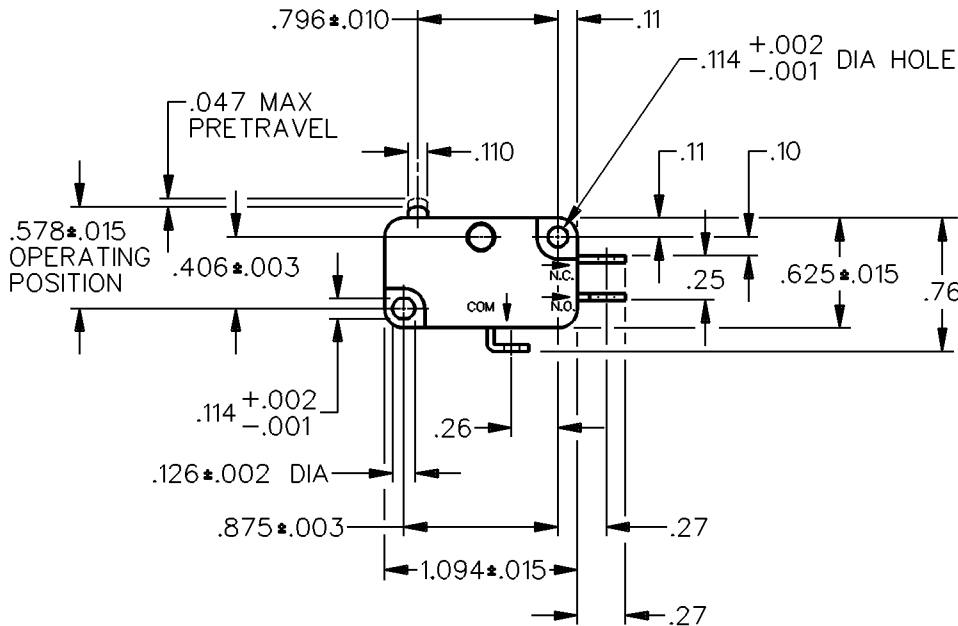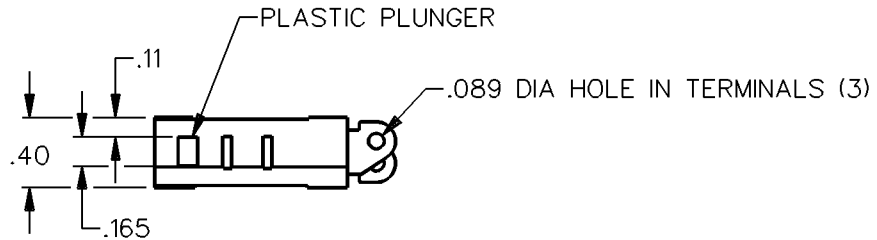

NOTE
1 - TERMINALS ARE PLATED FOR SOLDERING

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — — 8 OZ MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	ONE PLACE (.0) ± .030
RELEASE FORCE — — — — 2 OZ MIN	L156 11A 1/3HP 125, 250 OR 277 VAC 1/2A 125 VDC, 1/4A 250 VDC 4A 125 VAC "L"		TWO PLACE (.00) ± .015
DIFFERENTIAL TRAVEL — — — .006-.016			THREE PLACE (.000) ± .005
OVERTRAVEL — — — — .040 MIN		ANGLES	±
FREE POSITION — — — — .625 MAX		WEIGHT	.016 LB
RELEASE TRAVEL — — — — .010 MIN			

