



**Electrical specifications**

**Center Frequency:** 2385 MHz  
**Bandwidth:** 22 MHz  
**Input / Output Impedance:** 50 Ohms  
**Passband:** 2374-2396 MHz  
**Passband Insertion Loss:** 3 dB max (2dB typical)  
**Passband Ripple:** 1.2 dB max  
**Passband Return Loss:** 15 dB min (18dB typical)  
**Rejection:** 60 dB min @ Fo +/-25 MHz  
**Rejection 2:** 90 dBc min @ 2\*Fo +/-22 MHz  
**Power Handling:** 50 W


**Mechanical**

**Mounting Method:** Threaded Mounting Holes  
**Connector Type:** TNC Male / TNC Female  
**Dimensions:** 4.84" x 2.79" x 1.22" in

**Environmental**

**Operating Temperature:** -40 to +85 deg.C  
**Storage Temperature:** -55 to +95 deg.C  
**Shock:** 20 G. 11ms  
**Vibration:** 20 G. 5 to 200 MHz

**Outline Drawing:**

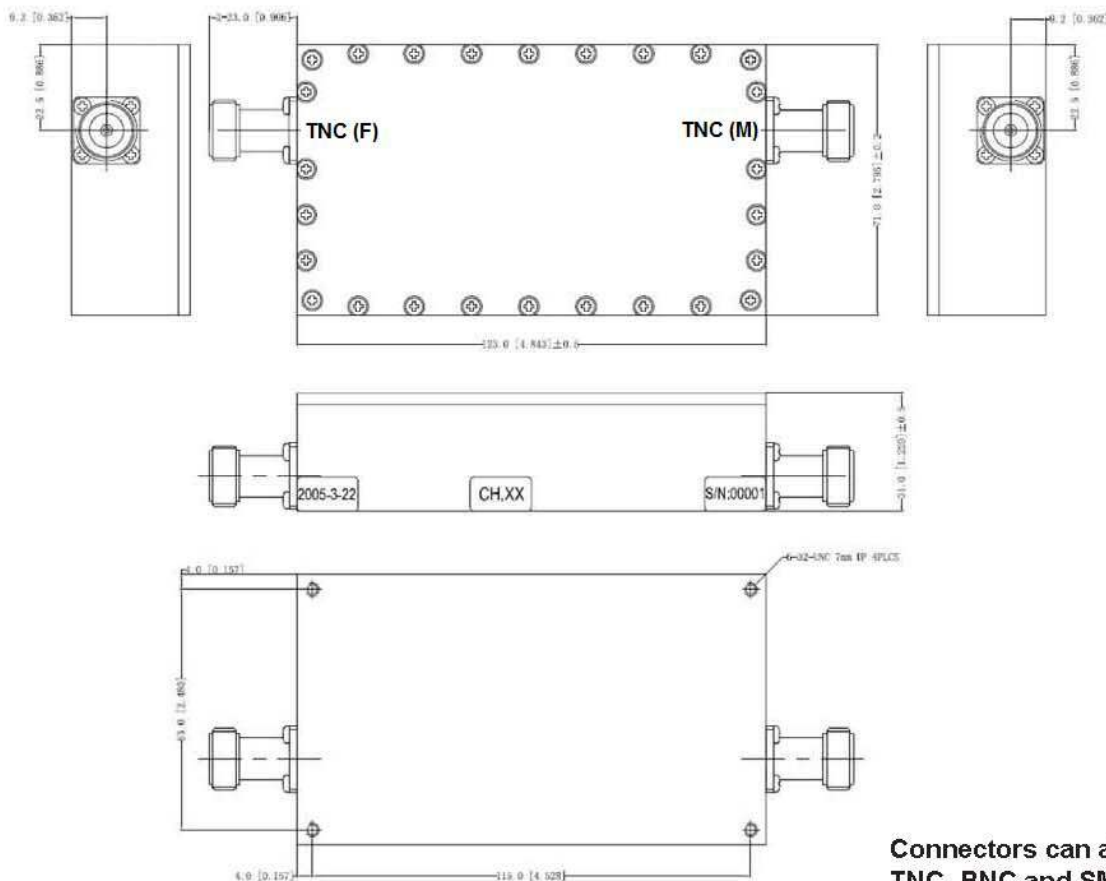

Connectors can also be  
TNC, BNC and SMA