

6

5





4

3

2

1

MATERIAL NUMBER	OLD PART NUMBER	FINISHED LENGTH
1300500122	ENP2115M010	3.28' +2.19' -0 [1.0M +55.6 -0]

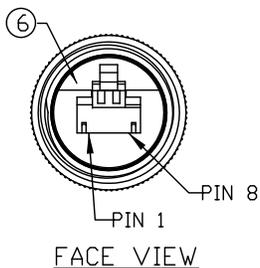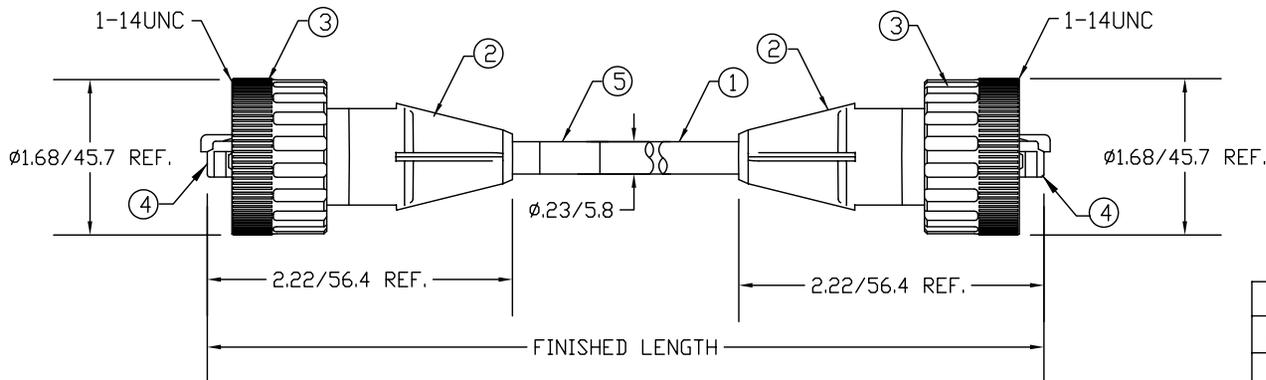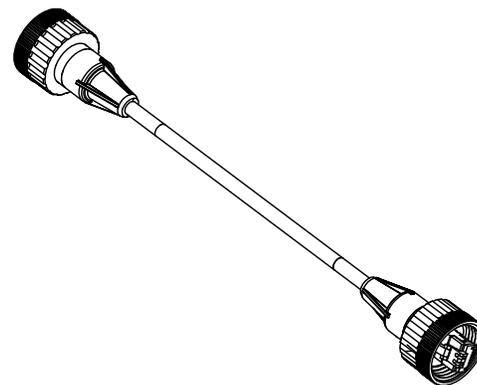

1	WHITE/GREEN	1
2	GREEN	2
3	WHITE/ORANGE	3
4	BLUE	4
5	WHITE/BLUE	5
6	ORANGE	6
7	WHITE/BROWN	7
8	BROWN	8
SHD	DRAIN WIRE	SHD

WIRING DIAGRAM

VOLTAGE RATING	125 VDC
AMPERAGE RATING	1.5 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 80°C

6	2	D-RING	VITON	BLACK
5	1	LABEL	PLASTIC FILM	BLACK/YELLOW
4	2	RJ45 PLUG	POLYCARBONATE	CLEAR
3	2	COUPLING NUT	ABS	BLACK
2	2	OVERMOLD	PUR	BLACK
1	1	ETHERNET CABLE-CATSE	PUR JACKET	BLACK
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

EC NO: WNA2010-0432
 DRWN: TVICKERS 2010/01/15
 CHKD: B.WOODMA
 APPR: DTTITUS 2010/01/15

QUALITY SYMBOLS
 ▽=0
 ▽/C=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±---	±---
3 PLACES	±---	±.005
2 PLACES	±0.13	±.010
1 PLACE	±0.25	±.020
ANGULAR ±1/2°		

DRAFT WHERE APPLICABLE
 MUST REMAIN
 WITHIN DIMENSIONS

DIMENSION STYLE
 IN/MM

DRAWN BY DATE

CHECKED BY DATE

B.WOODMA 2010/01/13

APPROVED BY DATE

DTITUS 2010/01/15

MATERIAL NO.

SEE CHART

SIZE A

SCALE
 1:1

DESIGN UNITS
 INCH

THIRD ANGLE PROJECTION

ETHERNET MMJ IND/IND
 568-A SHIELD ASSEMBLY
 PROPLEX STRANDED CABLE

MOLEX INCORPORATED

DOCUMENT NO. SD-130050-018

SHEET NO. 1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

6

5

4

3

2

1

E

E

D

D

C

C

B

B

A

A