


Max. Temperature : 260° during 10 seconds

								Dat.		Name			
									13Jul2007		ED		
09551663817.741	1	4-40 UNC	Black Insulator	Reel Packaging (160 connectors) see page 2/2	EC01215	14Jan2010	ED						
09551666817.741	2				34884	18Feb2008	LP						
09551667817.741	3				34379	13Jul2007	ED						
Part number	PL	Thread	Index designation		Mod.	Dat.	Name	HARTING EURL F-95972 Paris					



All Dim. in mm
Orig. Size DIN A 4




D-SUB SMT
Low Profile Male 9p
with die casted grounds
and 4-40 UNC screwlocks

TB 09 55 166 x817

Sub.

Maßstab/
Scale
1,5:1
Blatt/ Page
1 / 2

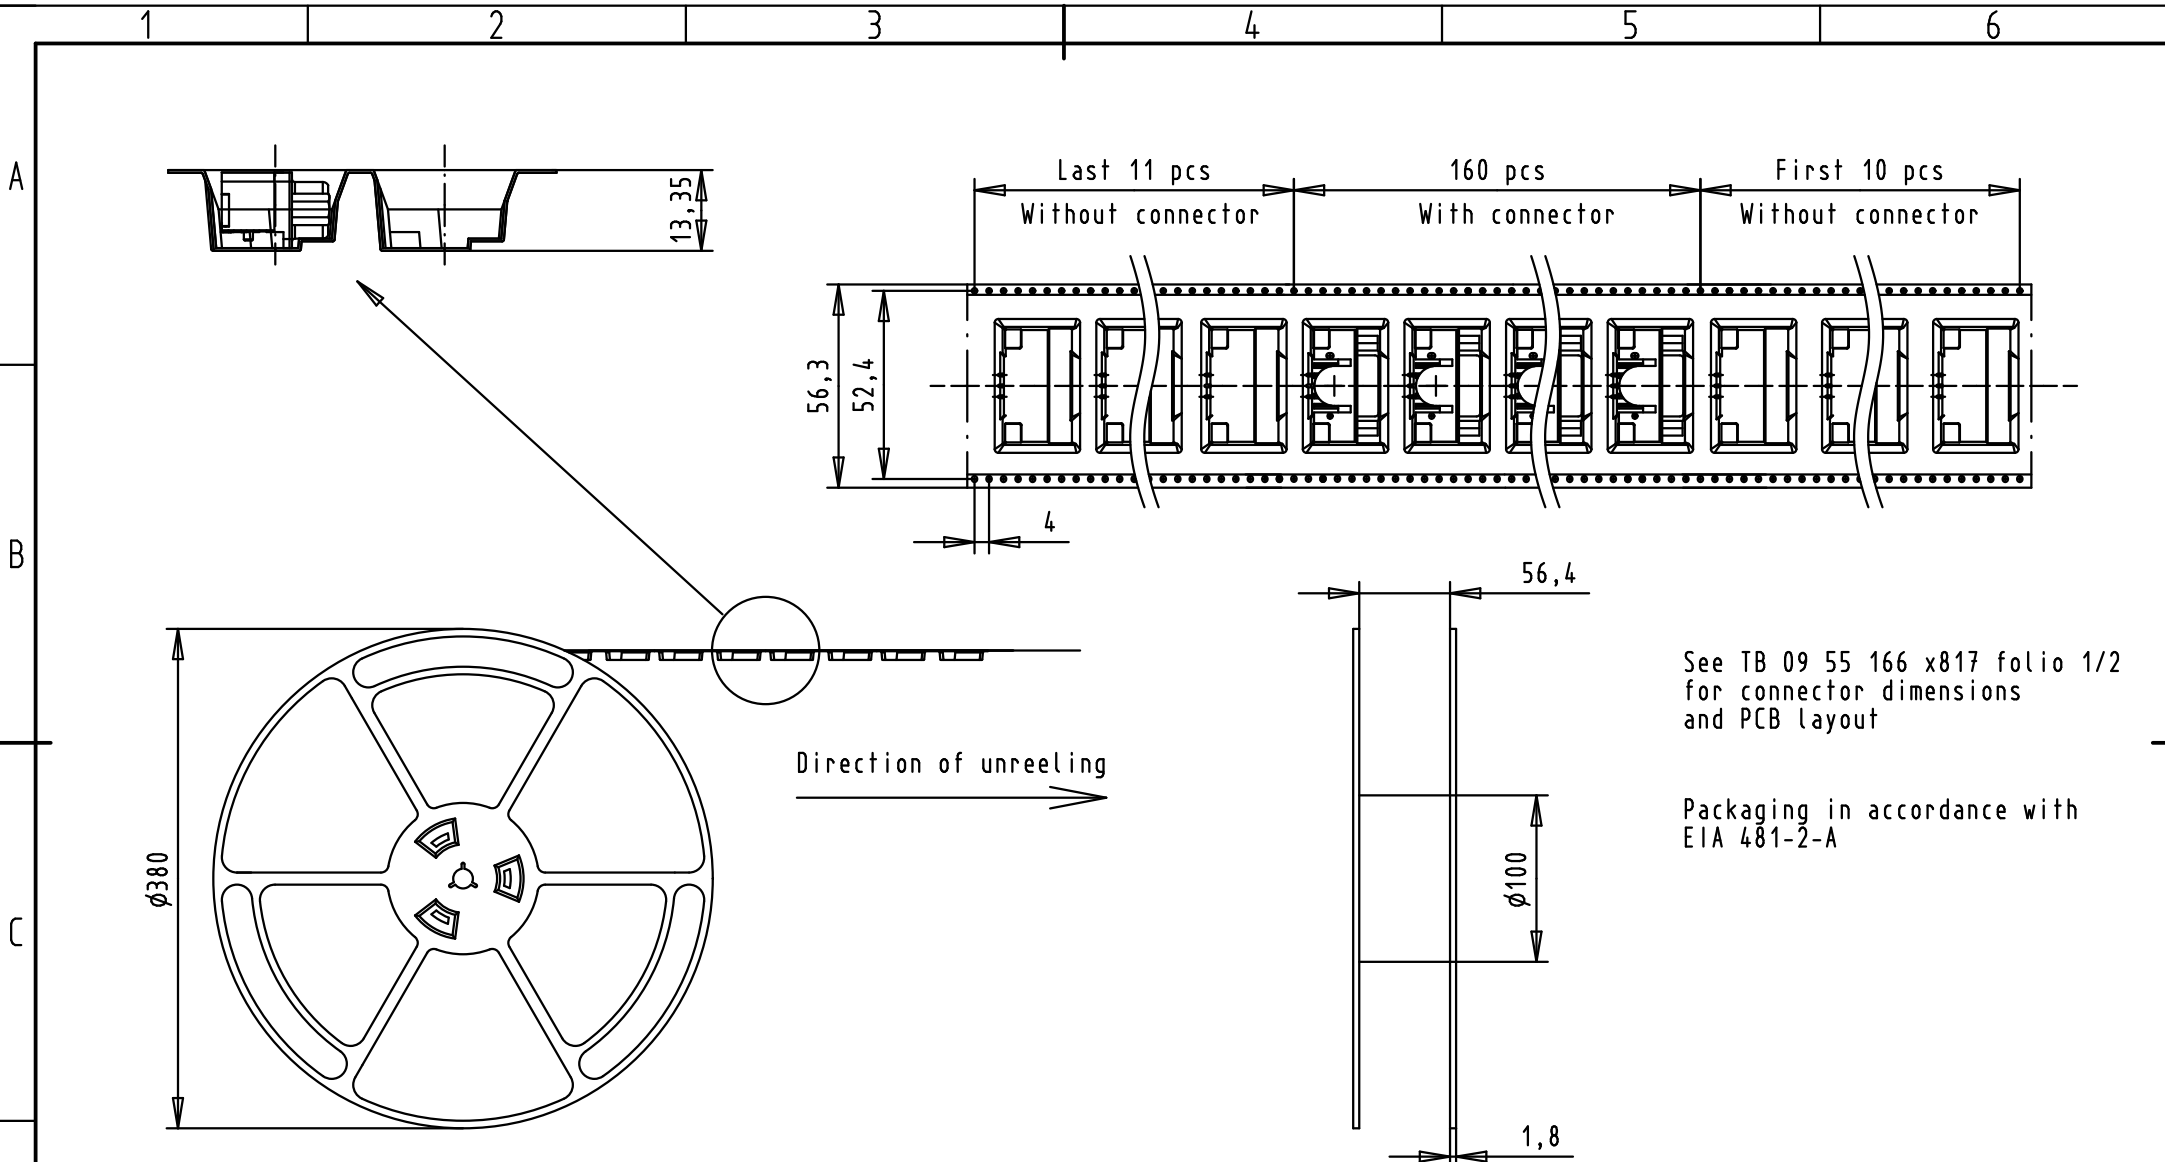


See TB 09 55 166 x817 folio 1/2 for connector dimensions and PCB layout

Packaging in accordance with EIA 481-2-A

09551663817.741	1	4-40 UNC	Black Insulator	Reel Packaging (160 connectors)
09551666817.741	2			
09551667817.741	3			
Part number	PL	Thread	Index designation	

				Dot.	Name
				Detail.	13Jul2007
				Insp.	
				Stand.	
EC01215	14Jan2010	ED			
EC01118	26Nov2009	LP			
34407	31Aug2007	ED			
34379	13Jul2007	ED			
Mod.	Dot.	Name			

HARTING EURL
F-95972 Paris



All Dim. in mm
Orig. Size DIN A 4

D-SUB SMT
Low Profile Male 9p
with die casted grounds
and 4-40 UNC screwlocks

TB 09 55 166 x817

Sub.