


POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
5	1200980084	B05S00PP4M010	3.28' +3.5" -0 [1.0M +89mm -0]

Face View

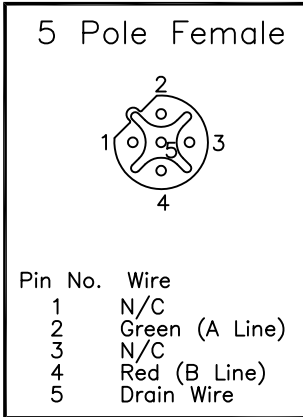

CONNECTOR SPECIFICATION:

VOLTAGE RATING	60V AC/DC
AMPERAGE RATING	4 AMPS
PROTECTION CLASS	IP67
OPERATING TEMPERATURE	STATIC: -40°C TO +80°C FLEXING: -20°C TO +80°C
UL CERTIFICATIONS	NOT APPLICABLE
CSA CERTIFICATIONS	NOT APPLICABLE

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	POLYURETHANE (PUR)	BLACK
2	CONTACT MATERIAL	COPPER ALLOY	GOLD OVER NICKEL
3	COUPLING NUT	BRASS	NICKEL PLATED
4	OVERMOLD	PUR	YELLOW
5	O-RING	VITON	RED
6	CABLE 2x0.2 ² /24 AWG	JACKET: PUR	JACKET: VIOLET

DESCRIPTION EC NO: WEU2010-0405 DRWN: LSTEMMLE 2010/03/03 CH'KD: NS APPR: FPACHER 2010/03/08	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	 	mm	IN/MM	2:1	METRIC	
		4 PLACES ±---	±---	DRAWN BY DATE LSTEMMLE 2010/03/03 CHECKED BY DATE FP 2010/03/03 APPROVED BY DATE FPACHER 2010/03/08		
		3 PLACES ±---	±---			
2 PLACES ±---	±.01	MATERIAL NO. SEE TABLE DOCUMENT NO. SD-120098-039 SHEET NO. 1 OF 1				
1 PLACE ±0.3	±---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MOLEX INCORPORATED		
ANGULAR ± --- °		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		