
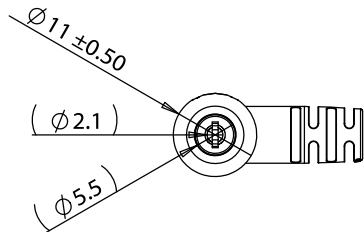


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00133	Connector, dc plug, 5.5x2.1x18.5 mm, molding style, spring contacts	1	
2	30-00395	Wire, 2C TS, 18 AWG, UL2468, 300V, 80C, 4.4 mm, VW-1, PVC, 87A	1	
3	24-00006	Overmold, PVC	1	

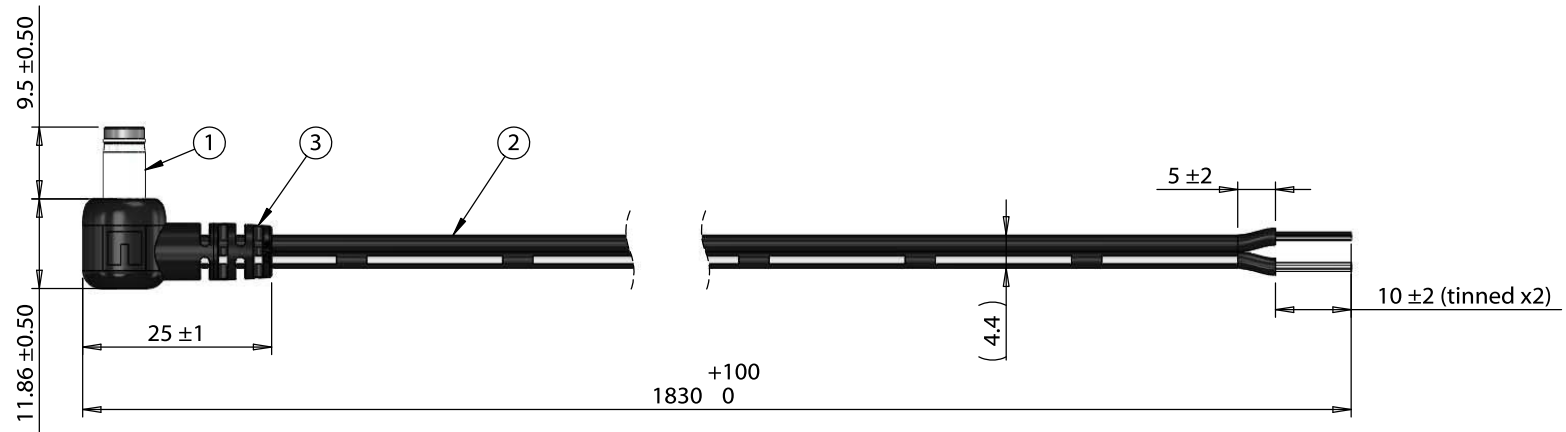

Wiring Diagram	
50-00133	wire color
center	black with stripe
sleeve	black

Notes:
Functionally equivalent components may be substituted

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>				
A	7/28/2017	Initial release	PS <small>Digitally signed by PS Date: 2017.07.28 16:00:24 -07'00'</small>	RoHS compliant					
			Verified:	Function test: no open, no short circuit, no intermittent	<table border="1"> <tr> <td>Size:</td> <td>Part number:</td> </tr> <tr> <td>A</td> <td>10-02510</td> </tr> </table>	Size:	Part number:	A	10-02510
Size:	Part number:								
A	10-02510								
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description:					
				Cable, 1830 mm, 5.5x2.1x9.5 mm 90° 50-00133 dc plug to 10 mm tinned, 18 AWG, UL2468, 30-00395 wire	Scale: 1:1				

