


Rev	AWO #	Description	Date	Appr
-		RELEASED	2/17/21	

APPROVED: _____
 DATE: _____ TITLE: _____

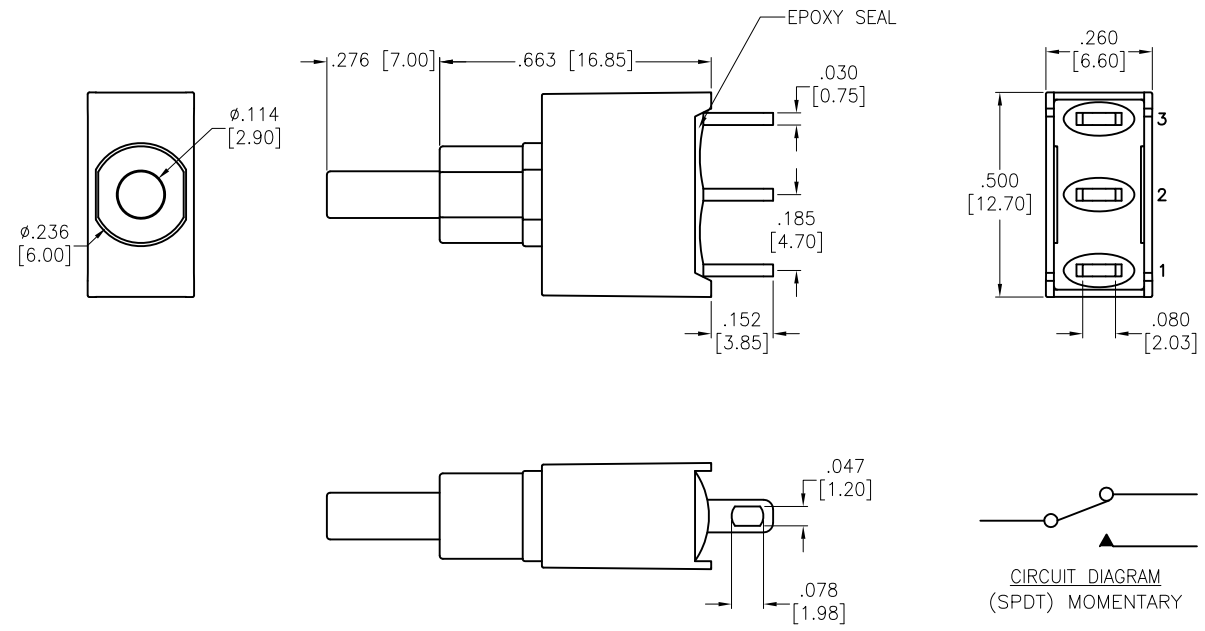

SPECIFICATIONS:

Material:
 Movable Contact: Copper Alloy, Silver Plated
 Terminal: Copper Alloy, Silver Plated With outer layer in Gold Plating

Electrical:
 Voltage rating: 120VAC or 38VDC
 Current rating: 1 Amps
 Contact resistance: 10 mΩ max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 1,500V RMS @Sea level

Mechanical:
 Waterproof: IP68
 Temperature Rating:
 Operating temperature: -30°C to +85°C
 Environmental:
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS		DATE
DRAWN	LH	2/17/21
CHECKED	AC	2/17/21
APPROVED		

ADAM TECH 909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE: SNAP-ACTING PUSHBUTTON SWITCH, IP68, SOLDER TYPE
 SPDT, ON-MOMENTARY, GOLD OVER SILVER PLATED

SIZE X	PART NO. SW-PB8-AA00B1GE-2	REV. -
REF: S00198T	SCALE: NTS	SHEET 1 OF 1