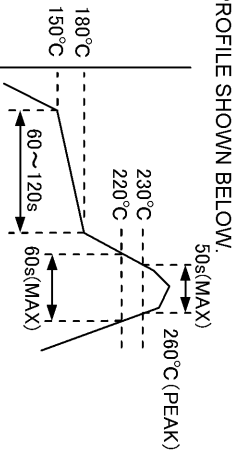


In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

APPLICABLE STANDARD		TEST METHOD		REQUIREMENTS		QT	AT
RATING	OPERATING TEMPERATURE RANGE	-55 °C TO 85 °C ⁽¹⁾	STORAGE TEMPERATURE RANGE	-10 °C TO 60 °C ⁽²⁾			
	VOLTAGE	100 V AC	OPERATING HUMIDITY RANGE	40 % TO 80 %			
	CURRENT	0.5 A	STORAGE HUMIDITY RANGE	40 % TO 70 % ⁽²⁾			
SPECIFICATIONS							
ITEM	TEST METHOD		REQUIREMENTS		QT	AT	
CONSTRUCTION		VISUALLY AND BY MEASURING INSTRUMENT.		ACCORDING TO DRAWING.		x	x
MARKING		CONFIRMED VISUALLY.				x	x
ELECTRIC CHARACTERISTICS							
CONTACT RESISTANCE	20 mV MAX, 1 mA(DC OR 1000Hz)	60 mΩ MAX. ⁽³⁾				x	
INSULATION RESISTANCE	100 V DC.	500 MΩ MIN.				x	
VOLTAGE PROOF	300 V AC FOR 1 min.	NO FLASHOVER OR BREAKDOWN.				x	
MECHANICAL CHARACTERISTICS							
INSERTION AND WITHDRAWAL FORCES	MEASURED BY APPLICABLE CONNECTOR.	INSERTION FORCE: 24.6 N MAX. WITHDRAWAL FORCE: 2.05 N MIN.				x	
MECHANICAL OPERATION	50 TIMES INSERTIONS AND EXTRactions.	① CONTACT RESISTANCE: 80 mΩ MAX. ⁽³⁾ ② NO DAMAGE, CRACK AND LOOSENESS OF PARTS.				x	
VIBRATION	FREQUENCY 10 TO 55 Hz, SINGL AMPLITUDE : 0.75 mm, FOR 2 h IN 3 DIRECTIONS.	① NO ELECTRICAL DISCONTINUITY OF 1 μs. ② NO DAMAGE, CRACK AND LOOSENESS OF PARTS.				x	
SHOCK	490 m/s ² , DURATION OF PULSE 11 ms FOR 3 TIMES IN 3 DIRECTIONS.					x	
ENVIRONMENTAL CHARACTERISTICS							
DAMP HEAT (STEADY STATE)	EXPOSED AT 40±2 °C, 90 ~ 95 %, 96 h.	① CONTACT RESISTANCE: 80 mΩ MAX. ⁽³⁾ ② INSULATION RESISTANCE: 500 MΩ MIN. ③ NO DAMAGE, CRACK AND LOOSENESS OF PARTS.				x	
DRY HEAT	EXPOSED AT 85±2 °C, 96 h						
RAPID CHANGE OF TEMPERATURE	TEMPERATURE -55→+5~+35→+85→+5~+35°C TIME 30→ 5 MAX→ 30→ 5 MAX min. UNDER 5 CYCLES.					x	
CORROSION SALT MIST	EXPOSED IN 5 % SALT WATER SPRAY FOR 48 h.	① CONTACT RESISTANCE: 80 mΩ MAX. ⁽³⁾ ② NO HEAVY CORROSION.				x	
SULFUR DIOXIDE	EXPOSED IN 25 PPM FOR 96 h. (TEST STANDARD: JIS C 60068)					x	
RESISTANCE TO SOLDERING HEAT	1)REFLOW SOLDERING : REFLOW 2 TIMES UNDER THE TEMPERATURE PROFILE SHOWN BELOW. 	NO DEFORMATION OF CASE OF EXCESSIVE LOOSENESS OF THE TERMINAL.				x	
SOLDERABILITY	2) SOLDERING IRONS : 360°C MAX. FOR 5 sec. SOLDERED AT SOLDER TEMPERATURE 240±3°C FOR IMMERSION DURATION, 3 sec.	A NEW UNIFORM COATING OF SOLDER SHALL COVER A MINIMUM OF 95 % OF THE SURFACE BEING IMMersed.				x	
△	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE		
REMARKS		APPROVED		HS. OKAWA	07.07.26		
⁽¹⁾ INCLUDE TEMPERATURE RISE CAUSED BY CURRENT-CARRYING.		CHECKED		EJ. WAKATSUKI	07.07.26		
⁽²⁾ "STORAGE" MEANS A LONG-TERM STORAGE STATE FOR THE UNUSED PRODUCT BEFORE ASSEMBLY TO PCB.		DESIGNED		TH. NODA	07.07.25		
⁽³⁾ INCLUDE CONDUCTOR RESISTANCE OF CABLE IN CASE THE MATED CONNECTOR IS CABLE TYPE (L=12mm)		DRAWN		TH. NODA	07.07.25		
Unless otherwise specified, refer to JIS-C-5402.							
Note QT:Qualification Test AT:Assurance Test X:Applicable Test		DRAWING NO.		ELC4-156703-00			
HRS		SPECIFICATION SHEET		PART NO.		FX15SC-41S-0.5SH	
		HIROSE ELECTRIC CO., LTD.		CODE NO.		QL575-2310-2-00	
						△	