
Ŧ	D	г п	m		0
				_	





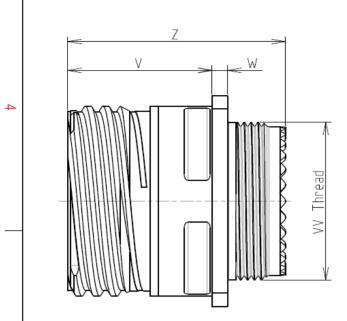

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Without Plating			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	65℃ to +175℃			

: 2000 hours

: 13.3 g ± 10%

8D 0

G

11

Х

01

В

F

E

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	20.62			
R2	18.26			
S	26.2±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M15x1-6g			


ORIENTATION : E

CONTACT LAYOUT : 11-01

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

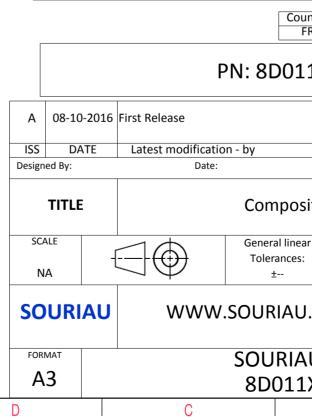

						1
	σ			A		
		1				4
S EXA	AMPLE					3
whic er of t idatio	non-conformit h does not co he Parties or b n, technical n	mply with by a third otice.)	party			
Intry R	y Jurisdiction & Control List Not Listed					2
1X01BE						
				N	/OD N°	
		CUSTO	MER DRAWIN	NG		
	e Receptacle 8D series					
ar	NPRDS / PROJECT 859					
	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					1
	DRG N°				SHEET	
.XU	1BE-C B			A	1/2	J

		۵	ار (m		0
		Contact Layout				Panel Cutout
4		01			Â	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
		1#12 11-01]		₹ 21	
ω	Ctc A	X Y 0 0				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of
22						(professional recommendati Country FR PN: 8D011X
					A 08-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
_					TITLE SCALE NA	Composite General linear Tolerances: ±
					FORMAT A3	J WWW.SOURIAU.CO SOURIAU 8D011X0
	H	G	F	E	D	C

