


DA03W3S93C8G40	UNC 4.40
DA03W3S93C7G40	UNC 4.40
DA03W3S93C6G40	UNC 4.40
DA03W3S93C5G40	UNC 4.40
DAL3W3S93C8G40	M3
DAL3W3S93C7G40	M3
DAL3W3S93C6G40	M3
DAL3W3S93C5G40	M3
TIN-LEAD P/N	Threaded A

LAYOUT DIMENSIONS (after plating)
CONNECTOR SIDE VIEW

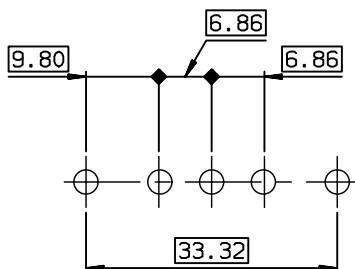

GENERAL CHARACTERISTICS : SEE DRAWING C01-8639-0002

European Views

www.fciconnect.com		surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection mm
TOLERANCES UNLESS OTHERWISE SPECIFIED				
ANGULAR	LINEAR	0.X	±0.1	size A3
0.XX' ±2'		0.XX	±0.1	Scale 1.5
		0.XXX	±0.1	ECN LS07-0070
Dr	JOUBERT	1998/03/16	Product family	D-SUB
Eng	PESSON	1998/03/16	Spec ref	-
Chr	LEGARE	1998/03/16		
Appr	LEGARE	1998/03/16		
FCj		title SOCKET CONNECTOR 3W3		dwg no C01-8639-1572
		STRA POWER P-F		Rev. E
		catalog no		CUSTOMER sheet 1 of 1

rev	ecn no	dr	date
B	-	SBA	2003/11/18
C	LS05-0056	MPE	2005/06/20
D	LS06-0097	LGO	2006/07/29
E	LS07-0070	MPE	2007/03/06
-	-	-	-
-	-	-	-
-	-	-	-