
THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

ı											
		STUD SIZE			CA9	CA-800(EZ)					
	PANDUIT PART #	ENGLISH	METRIC	L ± $\frac{.03}{[0,8]}$	$W\pm\frac{.01}{[0,3]}$	$C\pm\frac{.02}{[0,5]}$	$M\pm\frac{.03}{[0,8]}$	H± (0,3)	SERIES CRIMP DIE	SERIES CRIMP DIE	
	PMV1-3FB-3K		М3	.78 [19,8]	.23 [5,8]	.20 [5,1]	.64 [16,3]	.13 [3,3]		CD-800-1	
	PV18-6FB-3K	#6	M3,5	.78 [19,8]	.30 [7,6]	.20 [5,1]	.64 [16,3]	.15 [3,8]			
	PV18-6FNB-3K	#6	M3,5	.78 [19,8]	.25 [6,4]	.20 [5,1]	.64 [16,3]	.15 [3,8]			
	PV18-8FB-3K	#8	M4	.84 [21,3]	.32 [8,1]	.23 [5,8]	.68 [17,2]	.17 [4,3]	CD9-1A		
	PV18-10FB-3K	#10		.86 [21,8]	.35 [8,9]	.25 [6,4]	.70 [17,8]	.20 [5,1]	CD9-IA		
	PV18-10FNB-3K	#10		.86 [21,8]	.31 [7,9]	.25 [6,4]	.70 [17,8]	.20 [5,1]			
	PMV1-5FB-3K		M5	.86 [21,8]	.35 [8,9]	.25 [6,4]	.70 [17,8]	.20 [5,1]			
	PV18-14FB-3K	1/4"	M6	1.03 [26,2]	.44 [11,2]	.33 [8,4]	.78 [19,9]	.27 [6,9]			

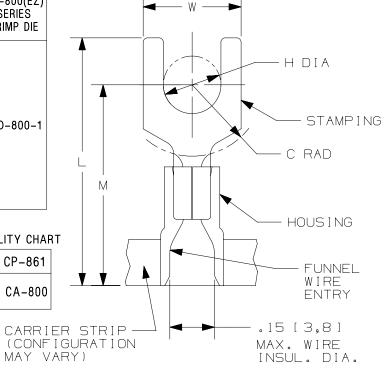

## PRESS/APPLICATOR COMPATIBILITY CHART

PRESS	CP-871	CP-861
APPLICATOR	CA9 CA-800EZ	CA-800

## NOTES:

1. UL LISTED AND CSA CERTIFIED FOR:

A. #22-18 AWG [0,5-1,0 mm2] SOLID OR STRANDED COPPER WIRE

B. 221°F [105°C] MAX. OPERATING TEMPERATURE C. 600 V. MAX. VOLTAGE RATING

2. SEE www.panduit.com FOR PACKAGE QUANTITIES

3. MATERIAL:

A. STAMPING: .03" [0,8] THK COPPER, TIN PLATED

B. HOUSING: VINYL, RED

4. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT


5. WIRE STRIP LENGTH:  $1/4^{**}$   $^{+1/32}_{-0}$  [6,4mm  $^{+0,8}_{-0}$ ]



E52164

TITLE





В

FORK TERMINALS, 2 PC. VINYL INSULATED, #22\_18 CONTINUOUS REFL

#								# 22-10, CONTINUOUS REEL					
								CUSTOMER DRAN			WING		
	08	1/17	TMR	TMR	RGB	ADMINISTRATIVE CHANGE SEE ECN	N41081BA-A41081		N41081BA/08  DATASET FILE NAME  N41081BA_DC/08A		PANDUIT		
	07	12/16	TMR	TMR	RGB	REVISED CERTIFICATION, C DIM TOL WAS .015	N41081BA-A41081						
	06	12/16	TMR	TMR	RGB	NONE, UPDATE TO REV 7	N41081BA-A41081	DIMENS	UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]			MATERIAL:	
	05	07/14	MBY	JHNU	RGB	REVISED NOTES, MOVED TOOLS TO TABLE, REVISED CERTIFICATION	N41081BA-A41081	.X ± .XXX ± .XX ± .XX ±		SEE NOTES			
07/10	04	09.17.12	JBN	LCA	VMB	ADDED METRIC EQUIVALENT. REVISED NOTES. UPDATED DRAWING TO CURRENT STANDARDS.	A 41081		<del>-</del>		HIRD ANGLE ROJECTION	DRAWING NUMBER:	
10100	REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY	DATE _	CHK FS	SCALE N.T.S.	SHT 1 0F 1	SIZE