

6

5


4

3

2


1

FEMALE INSERT FRONT VIEW




- 1 BROWN
- 2 WHITE
- 3 BLUE
- 4 BLACK
- 5 GRAY

MALE INSERT FRONT VIEW



- 1 BROWN
- 2 WHITE
- 3 BLUE
- 4 BLACK
- 5 GRAY

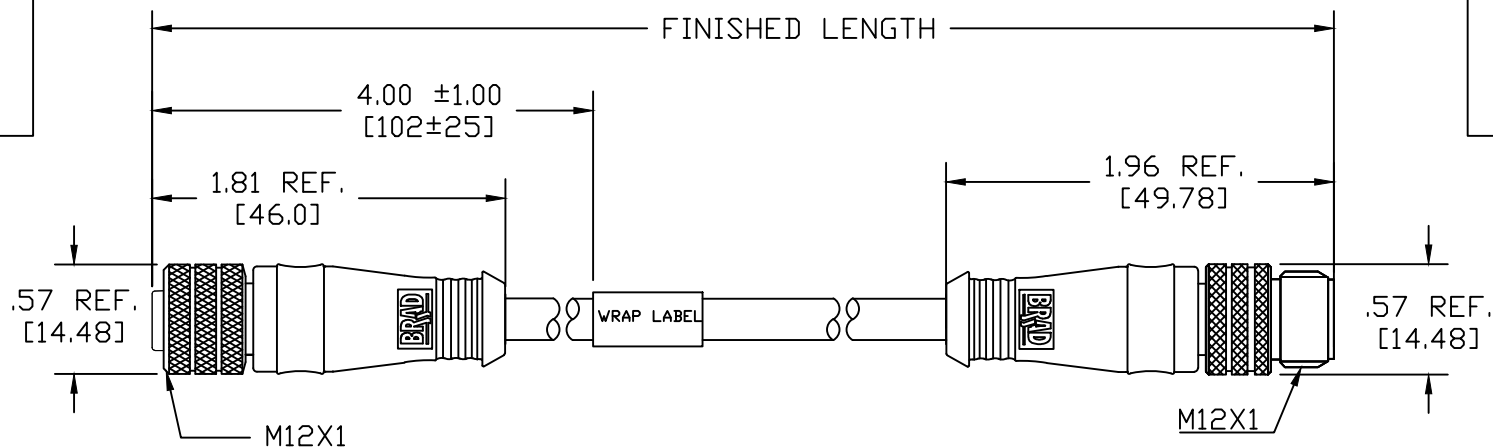

885030J06M020

Wire type  
20/5C AWG  
light gray

cable length  
M020----2 Meter  
M100----10 Meter

MECHANICAL  
 CONTACT : GOLD/NICKEL OVER COPPER ALLOY  
 INSERT : BLACK PUR  
 O-RING: RED VITON  
 COUPLING NUT: TEFLON COAT OVER NICKEL PLATED BRASS  
 MOLDED BODY: GRAY PVC  
 CABLE: 20 AWG 5 CONDUCTORS LIGHT GRAY PVC JACKET  
 CABLE MARKED: KIC-45 KURAMO E162205-K cnyus AWM  
 STYLE 2464 I A/B 80C300V VW-1 FT1\*\* LF  
 WRAP LABEL: MYLAR WHITE WITH BLACK LETTERS

ELECTRICAL  
 VOLTAGE RATING: 250V AC/DC  
 AMPERAGE: 4A

ENVIRONMENTAL  
 PROTECTION: IP67 PER IEC 60529  
 IP68 PER SPEC PS-120001-001  
 OPERATION TEMP: 0°C~80°C

RELEASE EC NO: WEU2012-0002 DRWN: TWOLDEGE 2011/07/22 CHKD: VOU APPR: JFMURPHY 2012/04/17	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE IN/MM	SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION																													
	$\nabla=0$ $\sphericalangle=0$	<table border="1"> <tr><th></th><th>mm</th><th>INCH</th></tr> <tr><td>4 PLACES</td><td>±---</td><td>±---</td></tr> <tr><td>3 PLACES</td><td>±---</td><td>±.005</td></tr> <tr><td>2 PLACES</td><td>±0.13</td><td>±.010</td></tr> <tr><td>1 PLACE</td><td>±.25</td><td>±.020</td></tr> </table>		mm	INCH	4 PLACES	±---	±---	3 PLACES	±---	±.005	2 PLACES	±0.13	±.010	1 PLACE	±.25	±.020	<table border="1"> <tr><td colspan="2">DRAWN BY DATE</td></tr> <tr><td>TWOLDEGE</td><td>2011/07/22</td></tr> <tr><td colspan="2">CHECKED BY DATE</td></tr> <tr><td>VOU</td><td>---</td></tr> <tr><td colspan="2">APPROVED BY DATE</td></tr> <tr><td>JFMURPHY</td><td>2012/04/17</td></tr> <tr><td colspan="2">MATERIAL NO.</td></tr> </table>	DRAWN BY DATE		TWOLDEGE	2011/07/22	CHECKED BY DATE		VOU	---	APPROVED BY DATE		JFMURPHY	2012/04/17	MATERIAL NO.		TITLE	MICRO CHANGE ASSEMBLY 5-POLE MALE/FEMALE ST/ST 20/5 AWG LIGHT GRAY PVC	
	mm	INCH																																	
4 PLACES	±---	±---																																	
3 PLACES	±---	±.005																																	
2 PLACES	±0.13	±.010																																	
1 PLACE	±.25	±.020																																	
DRAWN BY DATE																																			
TWOLDEGE	2011/07/22																																		
CHECKED BY DATE																																			
VOU	---																																		
APPROVED BY DATE																																			
JFMURPHY	2012/04/17																																		
MATERIAL NO.																																			
A	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DOCUMENT NO. SD-120002-017		SHEET NO. 1 OF 1																													

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

6

5

4

3

2

1

E

E

D

D

C

C

B

B

A

A