
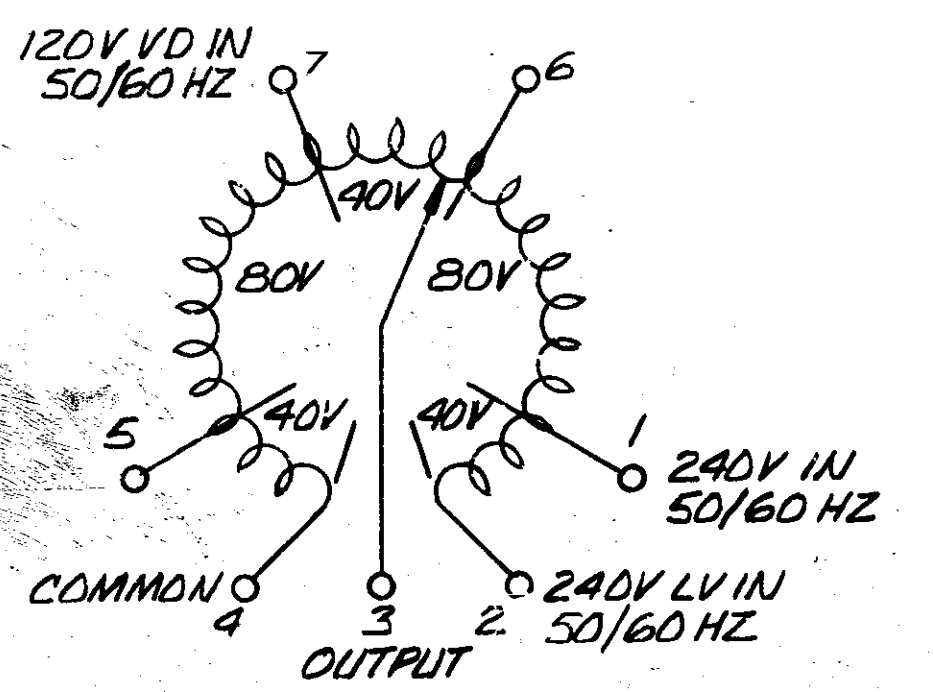


7.00 (177.8mm) DIA. DIAL PLATE GRADUATED 0-100
5.00 (127.0mm) DIA. KNOB

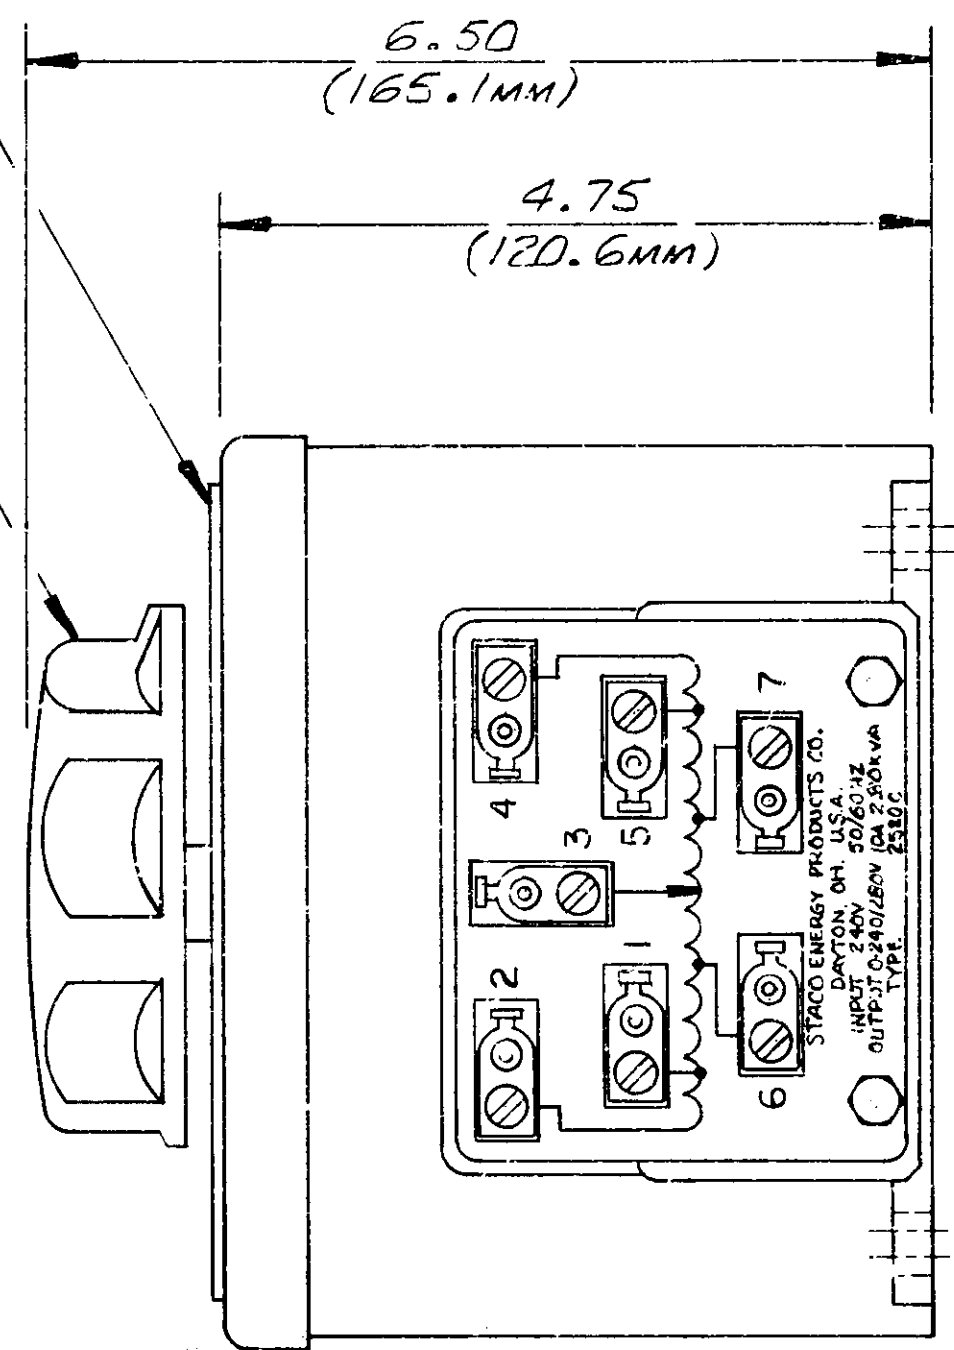

SCHMATIC
VIEW FROM BASE END
FUSE RECOMMENDED BUT NOT SUPPLIED

SPECIFICATIONS										
WIRING	INPUT		OUTPUT				SHAFT ROTATION FOR VOLTAGE INCREASE	TERMINAL CONNECTIONS FOR INCREASING VOLTAGE AS VIEWED FROM BASE END		
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD		CONSTANT IMPEDANCE LOAD		INPUT	OUTPUT	
				MAX. AMPS	MAX. KVA	MAX. AMPS				MAX. KVA
SINGLE PHASE	240	50/60	0-240	10	2.40	13	3.12	CW	2-4	4-3
			0-280	10	2.80	—	—	CCW	2-4	2-3
	120	50/60	0-280	10	1.20	—	—	CW	1-4	4-3
			0-280	10	1.20	—	—	CCW	2-5	2-3
—	—	—	—	—	—	—	CW	7-4	4-3	
—	—	—	—	—	—	—	CCW	6-2	2-3	

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ±				ALL DIMENSIONS APPLY AFTER PLATING		TITLE: SPECIFICATION CONTROL DRAWING					
FRACTIONS	DECIMALS	HOLES	ANGLES	DRAFT	VARIABLE TRANSFORMER		TYPE: 2520C				
MATERIAL:				FINISH:		DRAWN BY: R. TOLLIVER		DATE: 4-10-91	FIRST USED ON:	CUSTOMER APPROVAL:	DATE:
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein, except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.				DO NOT SCALE DWG.	CHECKER: S.A. SMITH	DATE: 10 APR 91	WEIGHT APPROX: 27 LBS	DWG. SIZE: C	DWG. NO.: 031-5502		
CODE IDENT NO. 83008				ENGINEER:		DATE:	SCALE: NONE				