
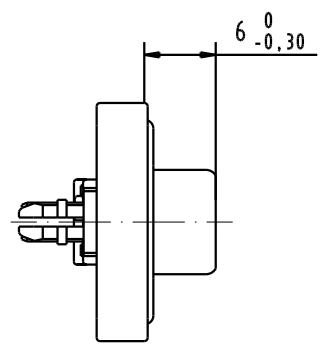



5 4 3 2 1

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75.01-802


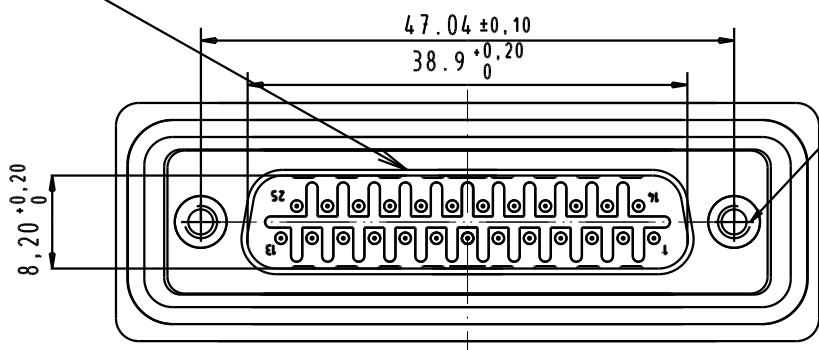


4-40 UNC -2B
length of engagement 3.5

1) Protection standard IP 67 according to IEC 529 / DIN 40050.

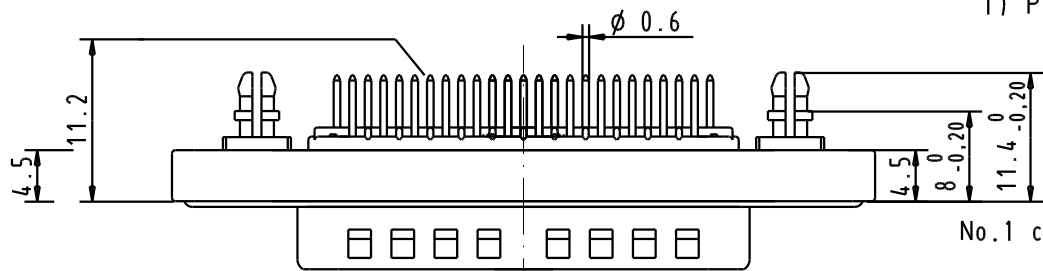

PCB layout hole component side
(PCB holes plating : Tin)

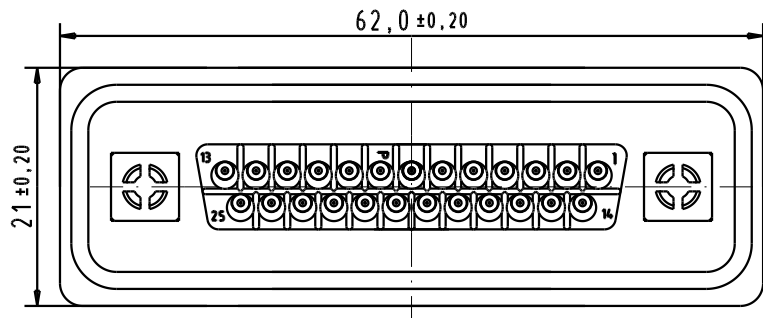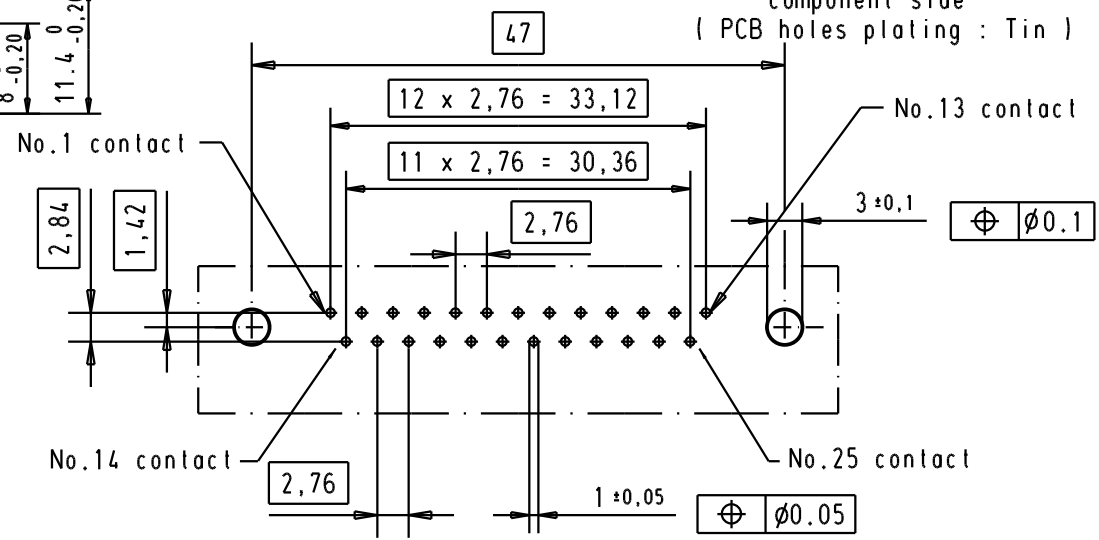

D

C

B

A

09 67 525 7675	Au plating 0,76 µm mini
Part Number	Performance Level

31587	07/01/04	S.H
Mod.	Dat.	Name

	Dat.	Name
Detail.	07/01/04	S.H.
Insp.		
Stand.		
HARTING ELEKTRONIK F-95972 Paris		

	D-SUB IP67 male 25 Poles straight solder pin with 4-40 UNC Spacer and clip	Maßstab/ Scale
TB 09 67 525 7675	Sub.	Blatt / Page