
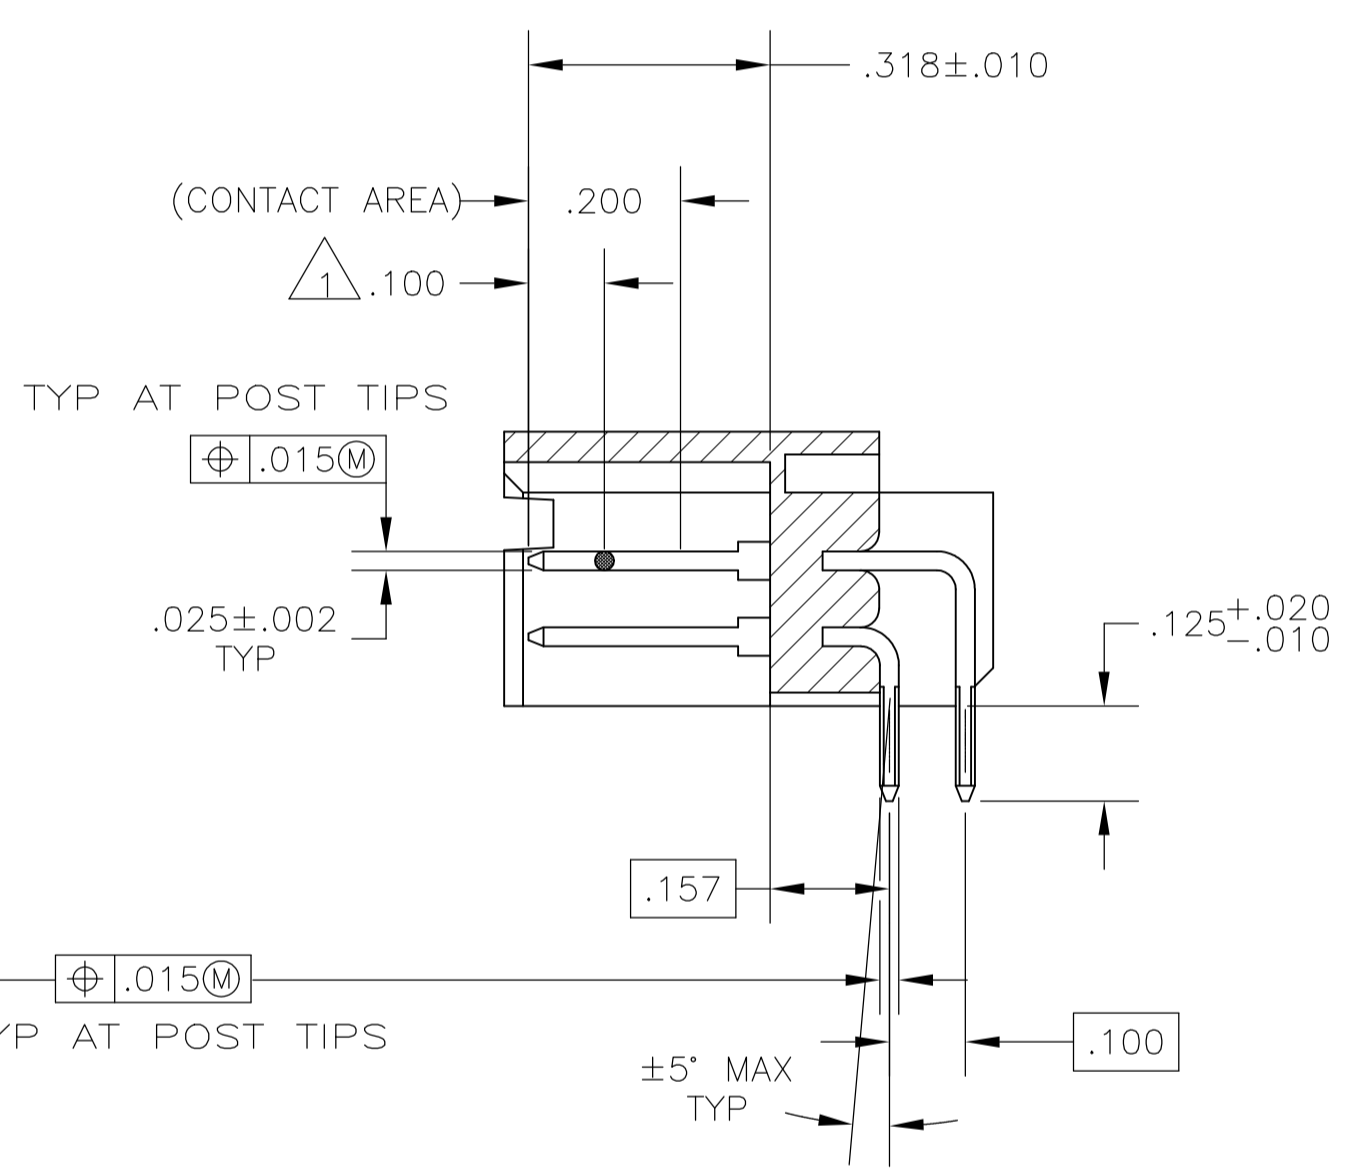
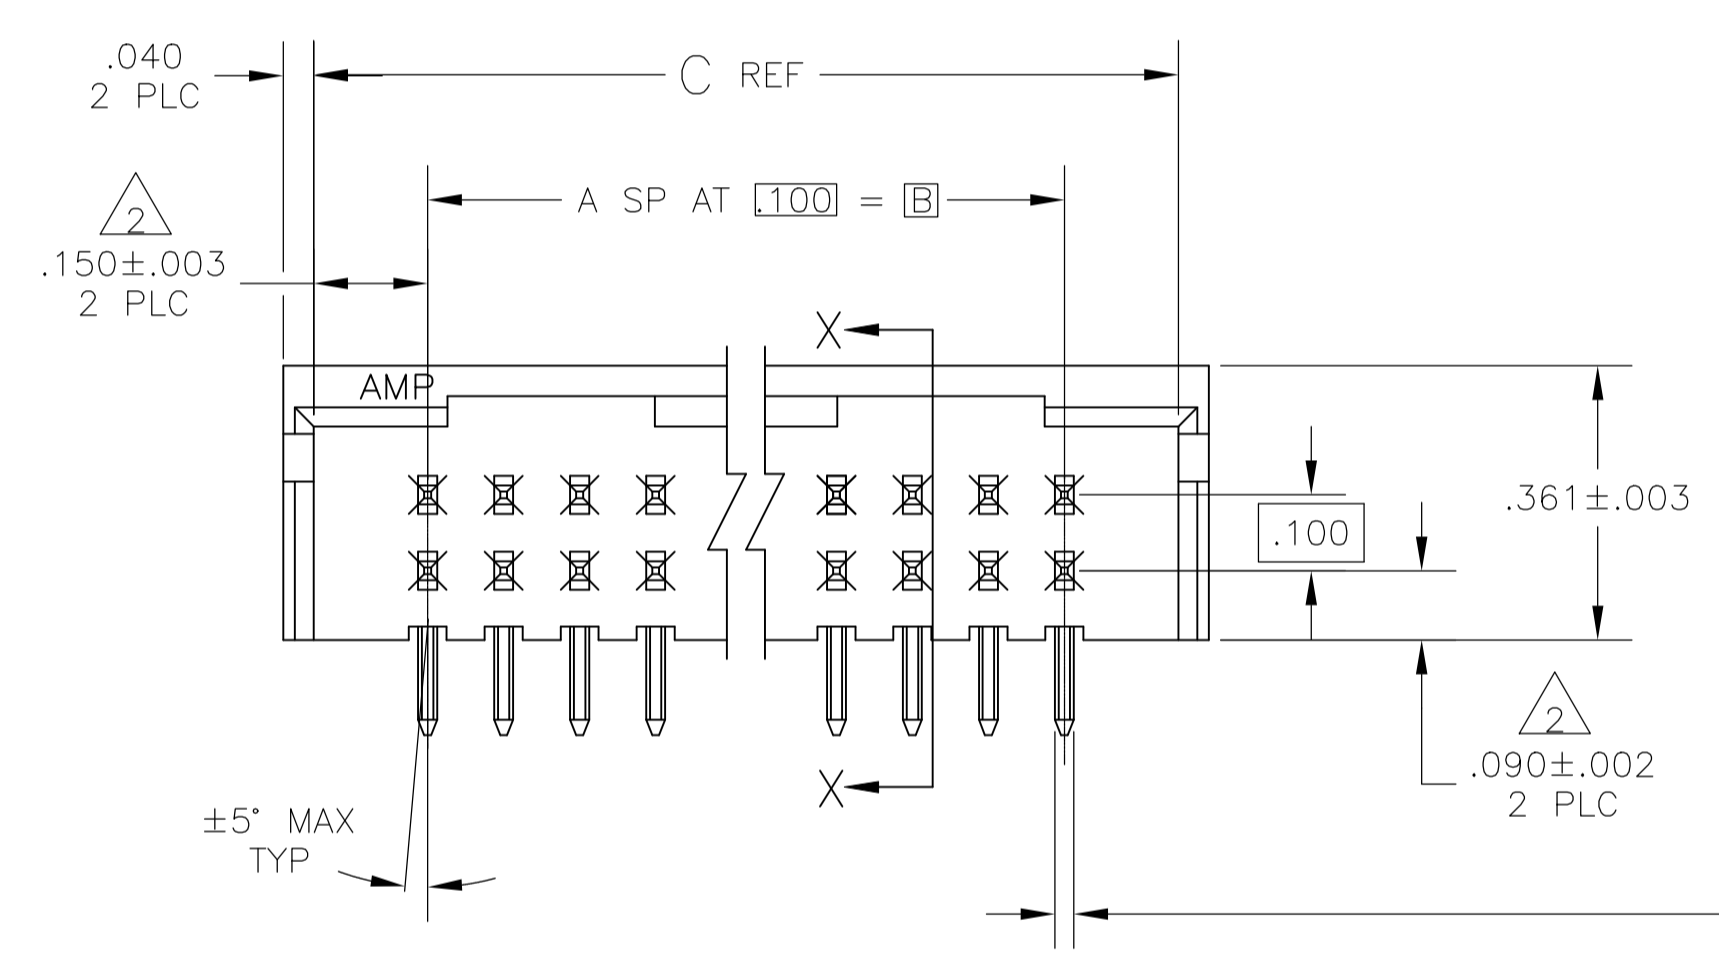
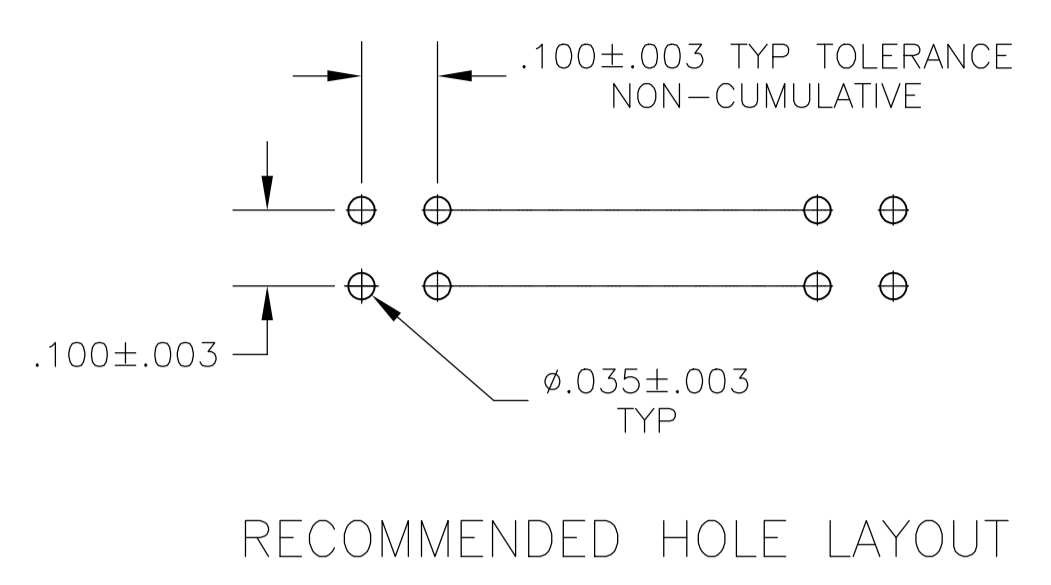


REVISIONS					
REV	LYR	DESCRIPTION	DATE	DMN	APVD
K2		PART STATUS UPDATED IN PART LIST TABLE	08FEB2018	SD	PS

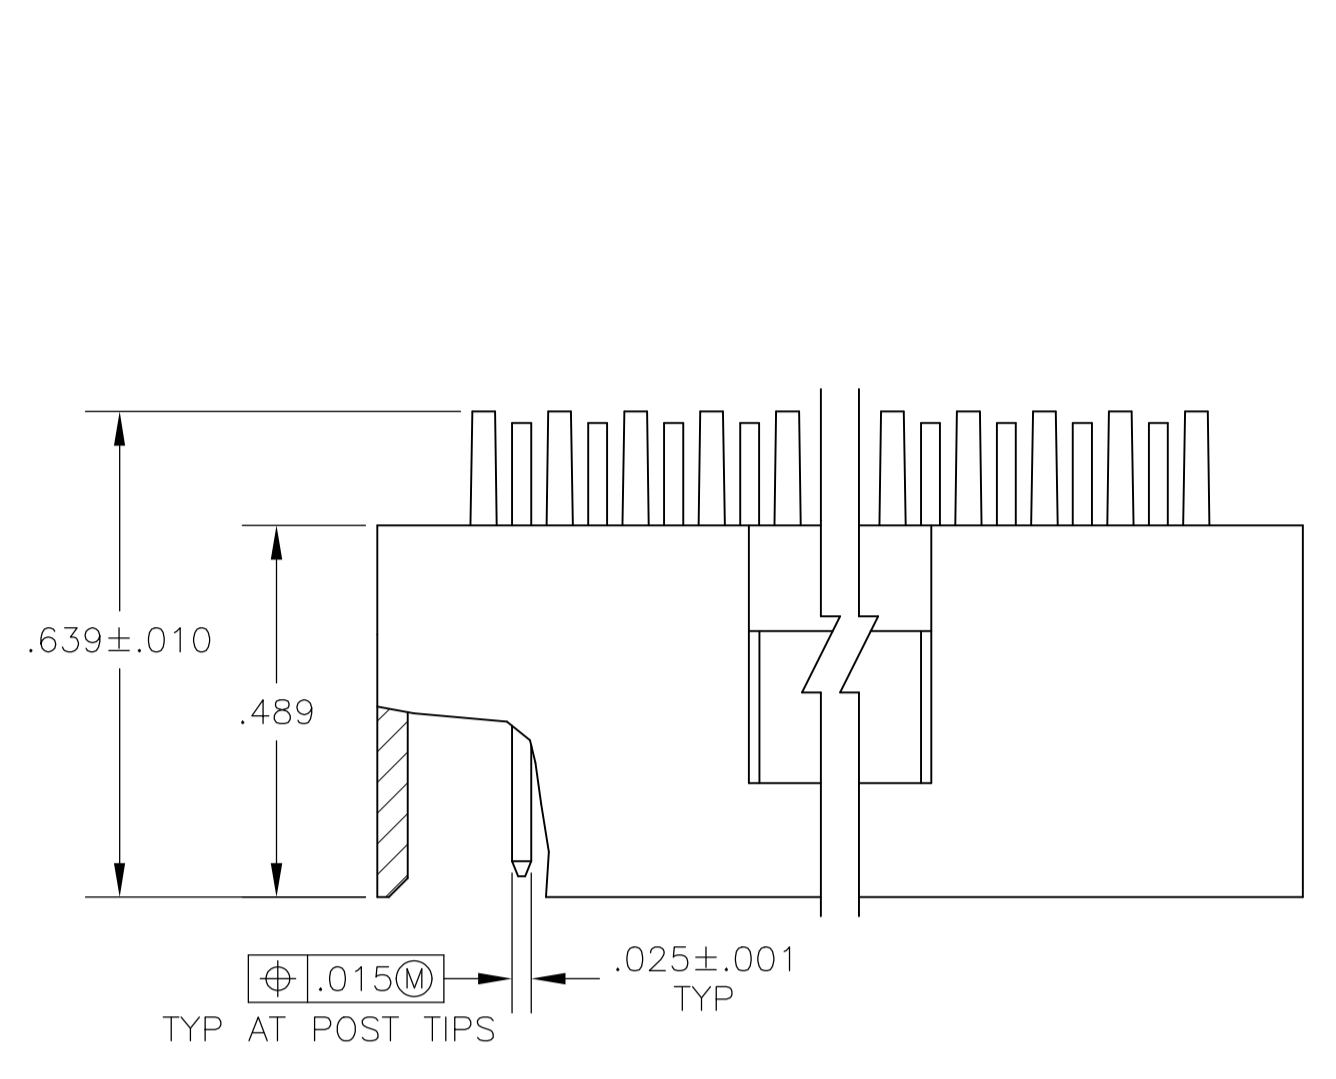

- 1 POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 2 THE NOTED DIMENSION APPLIES AT THE INTERSECTION OF THE POST AND HOUSING
- 3 OBSOLETE PART NUMBER
- 4 POSTS: .000015 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER .000050 NICKEL.
- 5 POSTS: .000015 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN ON SOLDER TAIL, ALL OVER .000050 NICKEL.
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

REV	LYR	DESCRIPTION	DATE	DMN	APVD
6		OBSOLETE			
5		2.700 2.400 24 50	7-102620-1		
5		2.200 1.900 19 40	6-102620-6		
5		1.900 1.600 16 34	6-102620-3		
5		1.700 1.400 14 30	6-102620-1		
5		1.500 1.200 12 26	5-102620-9		
5		1.400 1.100 11 24	5-102620-8		
5		1.200 .900 9 20	5-102620-6		
5		1.100 .800 8 18	5-102620-5		
5		1.000 .700 7 16	5-102620-4		
5		.900 .600 6 14	5-102620-3		
5		.800 .500 5 12	5-102620-2		
5		.700 .400 4 10	5-102620-1		
4		3.800 3.500 35 72	3-102620-2		
4		3.700 3.400 34 70	3-102620-1		
4		3.600 3.300 33 68	3-102620-0		
4		3.500 3.200 32 66	2-102620-9		
4		3.400 3.100 31 64	2-102620-8		
4		3.300 3.000 30 62	2-102620-7		
6		OBSOLETE			
4		3.200 2.900 29 60	2-102620-6		
4		3.100 2.800 28 58	2-102620-5		
4		3.000 2.700 27 56	2-102620-4		
4		2.900 2.600 26 54	2-102620-3		
4		2.800 2.500 25 52	2-102620-2		
6		OBSOLETE			
4		2.700 2.400 24 50	2-102620-1		
4		2.600 2.300 23 48	2-102620-0		
4		2.500 2.200 22 46	1-102620-9		
4		2.400 2.100 21 44	1-102620-8		
4		2.300 2.000 20 42	1-102620-7		
6		OBSOLETE			
4		2.200 1.900 19 40	1-102620-6		
4		2.100 1.800 18 38	1-102620-5		
4		2.000 1.700 17 36	1-102620-4		
6		OBSOLETE			
4		1.900 1.600 16 34	1-102620-3		
4		1.800 1.500 15 32	1-102620-2		
6		OBSOLETE			
4		1.700 1.400 14 30	1-102620-1		
6		OBSOLETE			
4		1.600 1.300 13 28	1-102620-0		
6		OBSOLETE			
4		1.500 1.200 12 26	102620-9		
4		1.400 1.100 11 24	102620-8		
4		1.300 1.000 10 22	102620-7		
4		1.200 .900 9 20	102620-6		
4		1.100 .800 8 18	102620-5		
4		1.000 .700 7 16	102620-4		
4		.900 .600 6 14	102620-3		
4		.800 .500 5 12	102620-2		
4		.700 .400 4 10	102620-1		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	0 PLC ± .005	1 PLC ± .004	2 PLC ± .003	3 PLC ± .002	4 PLC ± .001	ANGLES ± .005
--------------------	--	--------------	--------------	--------------	--------------	--------------	---------------

MATERIAL: HOUSING: PLASTE-RETARDANT THERMOPLASTIC; COLOR: BLACK; POSTS: PHOS BRONZE; FINISH: SEE TABLE

DMN: H MOLL 16NOV87	DMN: R FEJDT 16NOV87	DMN: R FLICKER 17NOV87	NAME:
STE TE Connectivity HEADER ASSY, MOD II, DBL ROW, .100X.100 C/L, RIGHT ANGLE, (3) SIDED SHROUD			
SIZE: A1	CAGE CODE: 00779	DRAWING NO: C-102620	RESTRICTED TO:
WEIGHT:	SCALE: 4:1	SHEET: 1 OF 1	REV: K2