
Ŧ	Q	П	m	D	C C





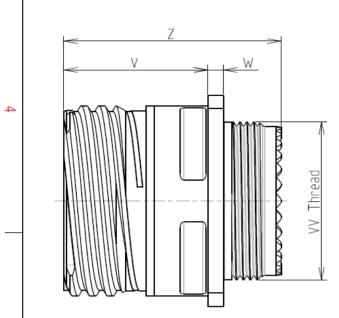

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel -Shell Plating : Passivated -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range

: 500 hours

: 39.36 g ± 10%

8D 0

G

11

Κ

02

А


F

Е

Dim	Nominal	
Р	3.25±0.2	
PP	4.93±0.2	
R1	20.62	
R2	18.26	
S	26.2±0.3	
V	20.83+0/-1.25	
W	2.1/2.5	
Z	31.5 Max	
VV THREAD	M15x1-6g	

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

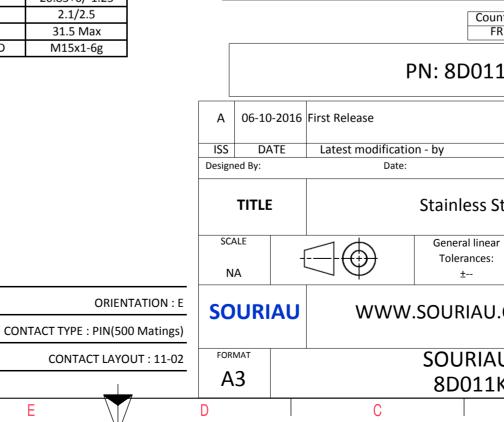

	Φ		A		_	
					4	
AS EXA	AMPLE				3	
s whic er of t ndatio untry FR	non-conformit ch does not co he Parties or b on, technical n Jurisd	mply with by a third par			2	
				MOD N°		
Stee	CUSTOMER DRAWING eel Receptacle 8D series NPRDS / PROJECT					
			59	perty of	1	
	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N°			SHEET		
κU	2AE-C	1		1/2	J	
	В	I	А			

ſ	<u>т</u>	G		П	m			0	
		Contact Layout							Panel Cutou
4	 	+Y 8 A +Y +X -Y .095 (2.4imm)					SQUARE	FLANGE RECEPTACLE (T REAR MOUNTING R1	
	Shell Arrangement size no. 11 -2	tion X-axis Y-axis (mm) (mm) (mm) A +.095 (2.41) +.000 (.00) B 095 (2.41) +.000 (.00)	Contact location All						Dim
ى ع									ØA ØAA R1 ØT
	-						t	due to a use o he Specifications	oot be liable for an of the Products wh issued by either of onal recommendat
0								Р	Countr FR N: 8D011
						ISS Designed	Зу:	atest modification Date:	
<u> </u>						SCALE NA]	General linear Tolerances: ±
							RIAU	WWW.	SOURIAU.C
		<u> </u>				FORMAT A3			SOURIAU 8D011K
	Н	G	I	F	E	D	I	С	

