

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION



© COPYRIGHT 19 BY -

ALL RIGHTS RESERVED.

**creo**  
 Creo Parametric 2.0  
**DO NOT REVISE**  
**EXCEPT BY CAD**

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
B		REDRAW BY CAD W/O CHANGE EC 435/99	29SEP99	MLO	PLF
B1		REVISED BY ECO-18-001641	25FEB2021	PSB	DAO

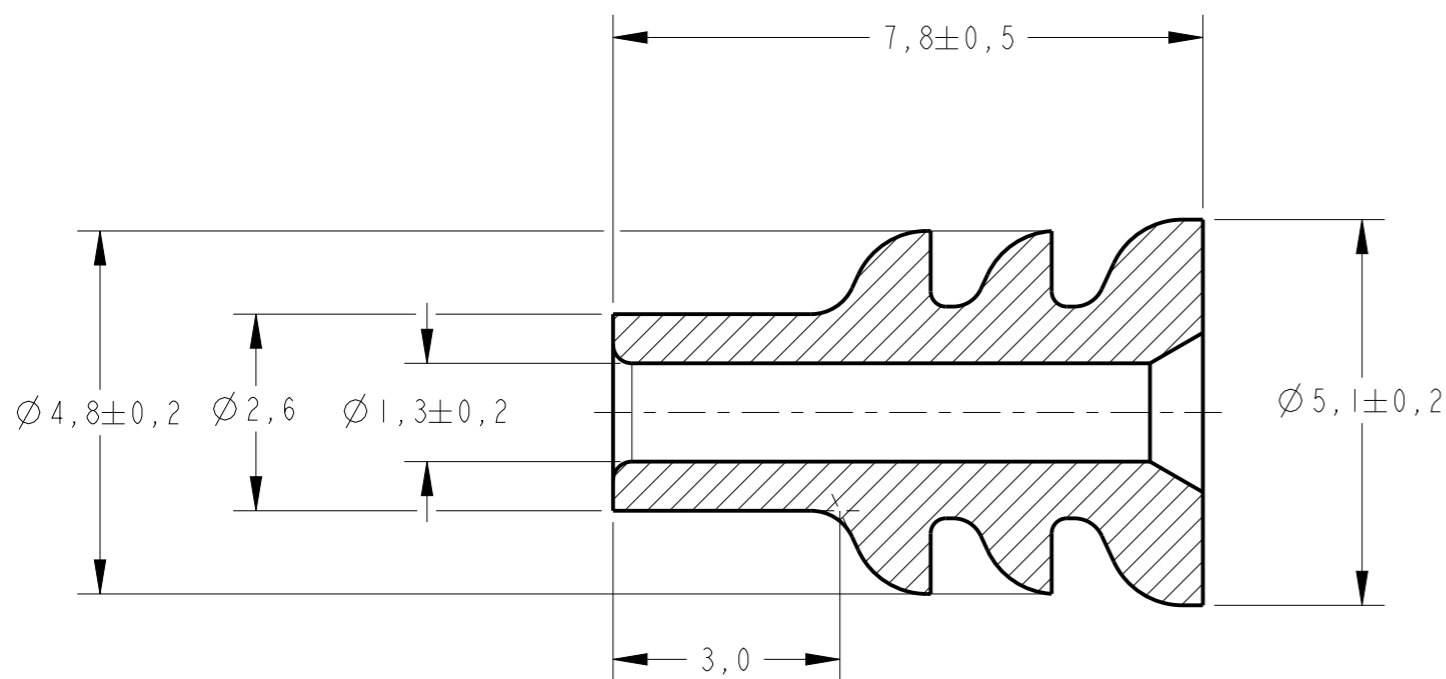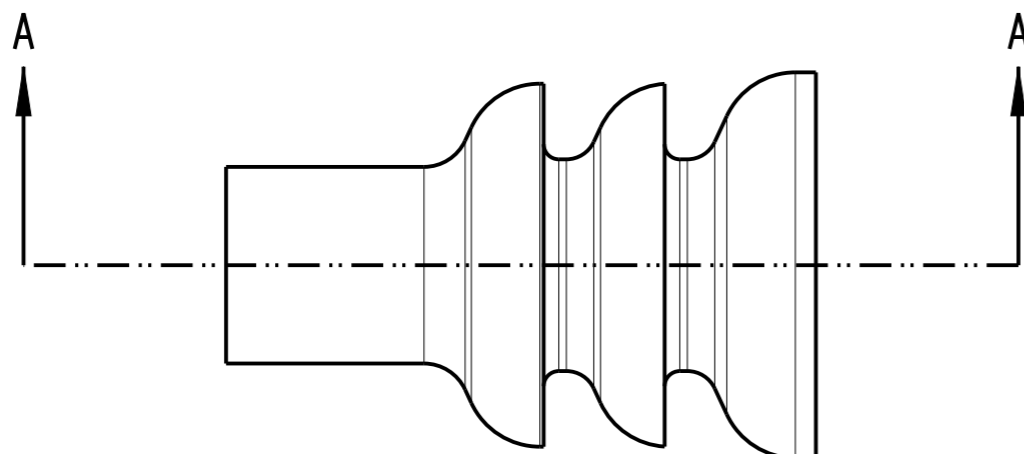

NOTAS:

1- FAIXA CONDUTOR: 0,5-1,5mm<sup>2</sup>  
 FAIXA DO DIAMETRO ISOLANTE: 1,4-2,4mm.

1 - WIRE RANGE: 0,5-1,5mm<sup>2</sup>  
 INSULATION DIAMETER RANGE: 1,4-2,4mm.

—	MARROM AVERMELHADO REDDISH BROWN	SILICONE	444430-1
RAW MAT'L NO	FINISH	MATERIAL	PART NUMBER

SECTION A-A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.L. OGAWA 02SEP99	<b>STE</b> TE Connectivity	
		CHK P.L. FARIA 29SEP99		
		APVD I.G. DALTO 31JAN00	NAME SINGLE WIRE SEAL	
DIMENSIONS: mm		PRODUCT SPEC -		SIZE A3
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±0,3 2 PLC ±0,2 3 PLC ± 4 PLC ± ANGLES ±1°		APPLICATION SPEC -		CAGE CODE -
MATERIAL SEE TABLE		WEIGHT -		DRAWING NO C-444430
FINISH SEE TABLE		Customer Drawing		RESTRICTED TO -
		SCALE 10:1		SHEET 1 OF 1
				REV B1