


Face View of D conn. x3

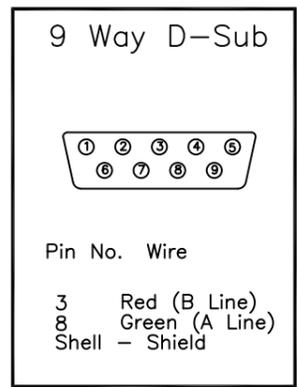

MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
1200988035	MM3G72PP4M010	3.28' +3.5" -0 [1.0M +89mm -0]

CONNECTOR SPECIFICATION:

VOLTAGE RATING	30V AC/DC
AMPERAGE RATING	4 AMPS
PROTECTION CLASS	IP67
OPERATING TEMPERATURE	STATIC: -40°C TO +80°C FLEXING: -20°C TO +80°C
UL CERTIFICATIONS	NOT APPLICABLE
CSA CERTIFICATIONS	NOT APPLICABLE

ITEM	COMPONENT	MATERIAL	FINISH
1	CABLE 2x0.2 ² /24 AWG	JACKET: PUR	JACKET: VIOLET

DESCRIPTION EC NO: WEU2010-0405 DRWN: LSTEMMLE 2010/03/03 CH'KD: NS APPR: FPACHER 2010/03/08	QUALITY SYMBOLS ▽ = 0 ▽/C = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
			mm	INCH	IN/MM		NTS		METRIC
		4 PLACES	±---	±---	DRAWN BY	DATE	D-SUB HORVERT/D-SUB VERT -PUR-1M PROFI BUS		
		3 PLACES	±---	±---	LSTEMMLE	2010/03/03			
	2 PLACES	±---	±.01	CHECKED BY	DATE	MOLEX INCORPORATED			
	1 PLACE	±0.3	±---	FP	2010/03/04				
	ANGULAR ± --- °		APPROVED BY		DATE	MOLEX INCORPORATED			
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		FPACHER		2010/03/08				
1	REV	SEE TABLE		MATERIAL NO.	DOCUMENT NO.	SD-120102-003		SHEET NO.	
		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					1 OF 1