


THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

NOTES:

- SPECIFICATION:  
 JACKET: SILICONE. MULTI-LAYER, 1ST LAYER WHITE; 2ND LAYER "COLOR" OD: .154±.008 (3.9 mm)  
 CONDUCTOR: BARE COPPER, STRANDING 651 x 0.07 mm = 2.50 mm<sup>2</sup>, 13 AWG.
- RATING:  
 VOLTAGE: 1,000 V CAT IV PER IEC 61010-031  
 CURRENT: 36 A MAX.  
 TEMPERATURE: -60° C TO +180° C.
- AVAILABLE IN 3 STANDARD LENGTHS AND 6 COLORS – SEE MODEL NUMBER BELOW.

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
-	CLASS A RELEASED	7/11/99	
A	UPDATED FORMAT w/ CAGE CODE	4/18/04	

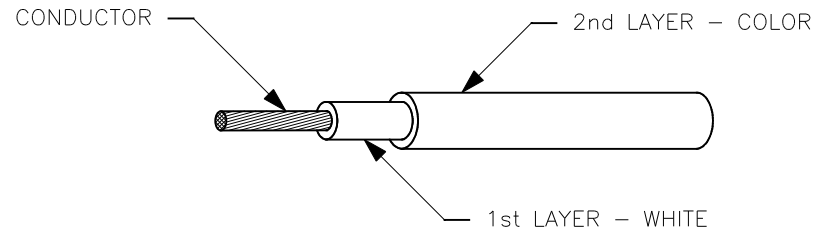

**MODEL NUMBER**

**CT2844-#-XXX**

COLOR: 0 – BLACK  
 2 – RED  
 4 – YELLOW  
 5 – GREEN  
 6 – BLUE  
 9 – WHITE

LENGTH: 10 – 10 m PACKAGE  
 50 – 50 m SPOOL  
 100 – 100 m SPOOL

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS    DECIMALS ± 1/32        .XX ± .02 .XXX ± .005 DO NOT SCALE DRAWING	CONTRACT NO.		<b>Cal Test Electronics</b> 22820 Savi Ranch Parkway Yorba Linda, CA 92887-4610			
			APPROVALS	DATE	TITLE			
MATERIAL		DRAWN	WDH	7/11/99	<b>WIRE, TEST LEAD, SILICONE JACKET,          2.50 mm<sup>2</sup>, 13 AWG, 36 A</b>			
FINISH		CHECKED			SIZE	CAGE CODE	DWG. NO.	REV.
NEXT ASSY	USED ON	ENGR.			<b>A</b>	<b>43F45</b>	<b>P284400</b>	<b>A</b>
APPLICATION		DESIGN ACTIVITY			SCALE	NONE		SHEET 1 OF 1