

MATERIALS AND FINISHES:

MCX PLUG R/A CONNECTOR:

BODY, CRIMP TUBE, CAP: BRASS  
PLATED NICKEL

CENTER CONTACT: BRASS  
PLATED GOLD

OUTER CONTACT: BERYLLIUM COPPER  
PLATED GOLD

INSULATOR: PTFE

MHF® I LK CONNECTOR



CABLE: 1.37MM CABLE

HEAT SHRINK TUBE: PE

PERFORMANCE REQUIREMENTS

FREQUENCY RANGE: 0~6GHz  
IMPEDANCE: 50 Ω  
WITHSTAND VOLTAGE(AC): 350V @0.5mA  
CONTINUITY: 100% TEST

PACKAGING BY PLASTIC BAG

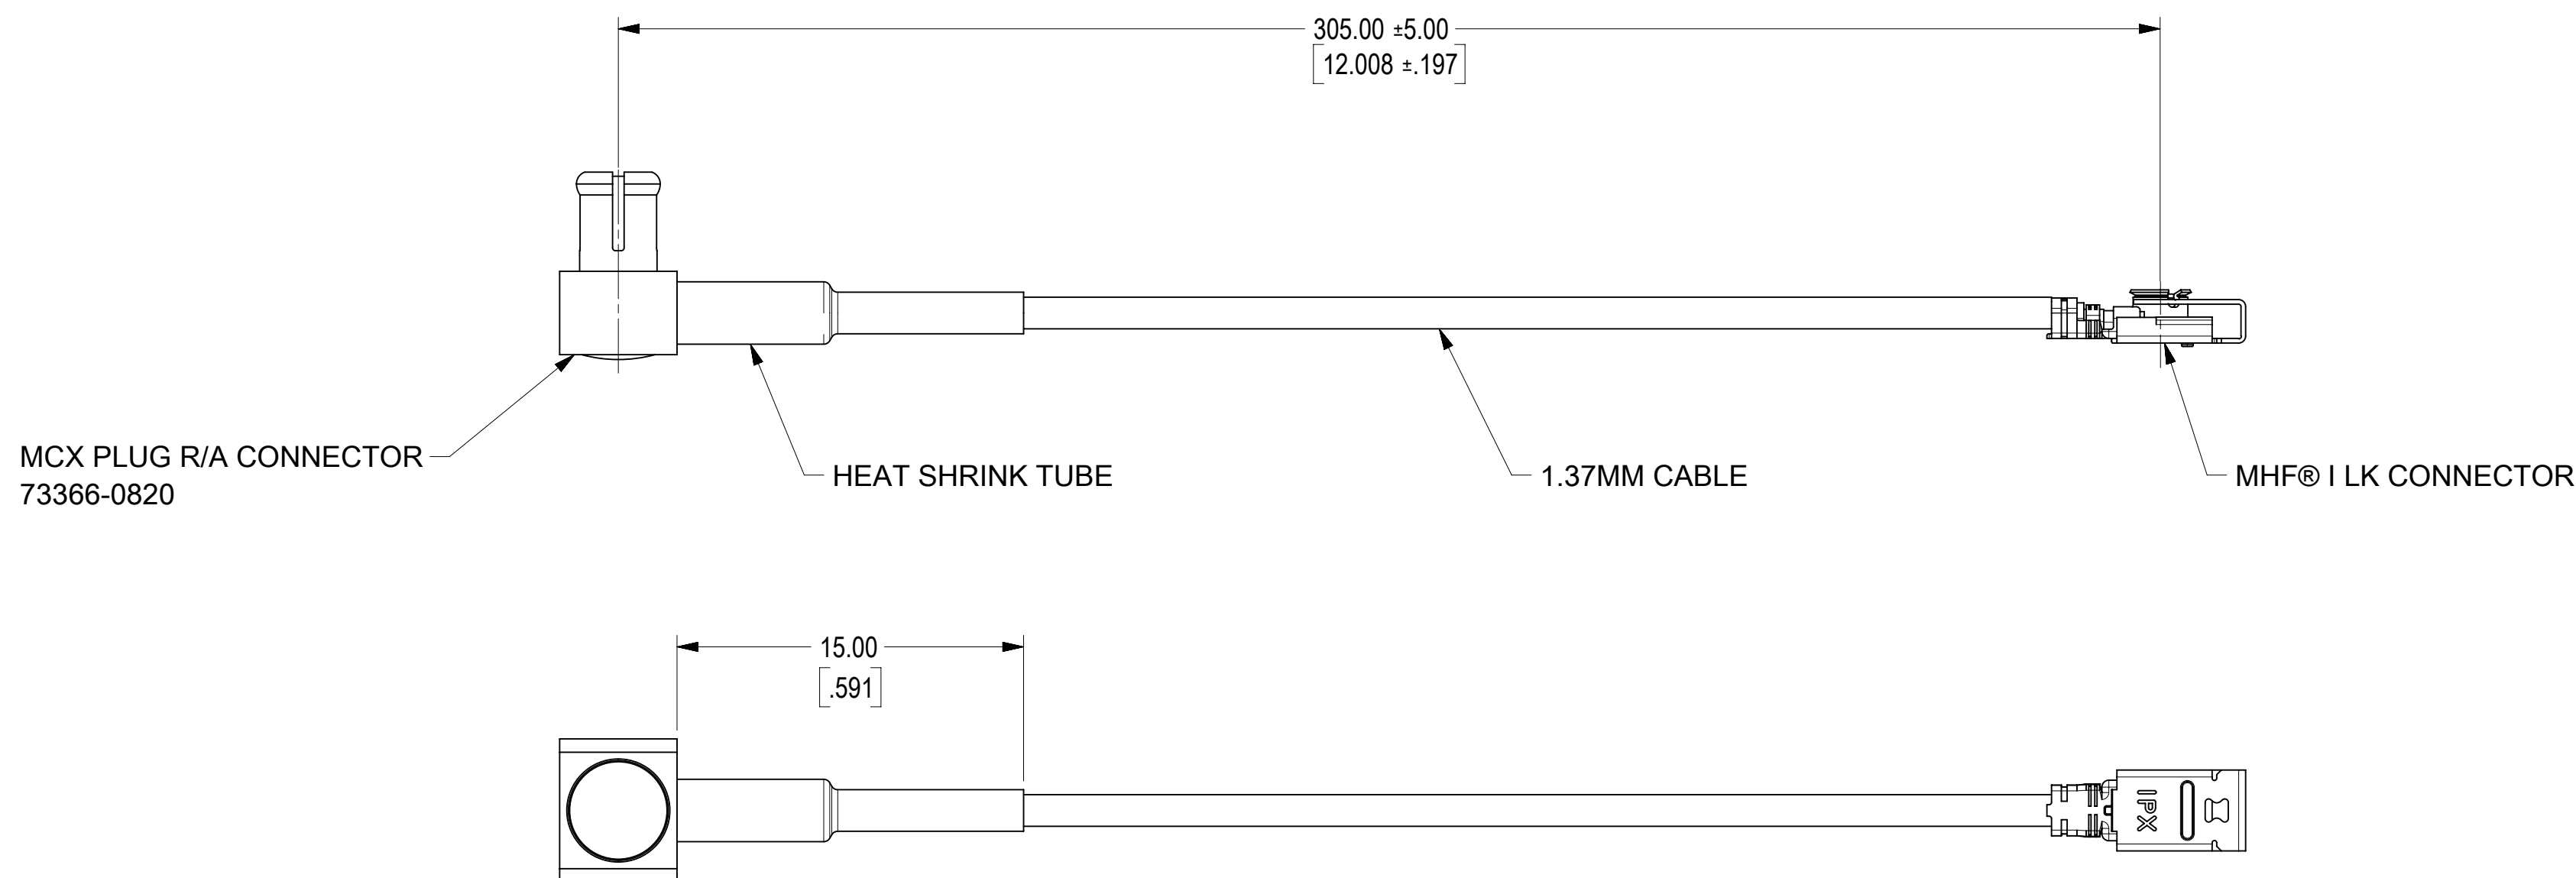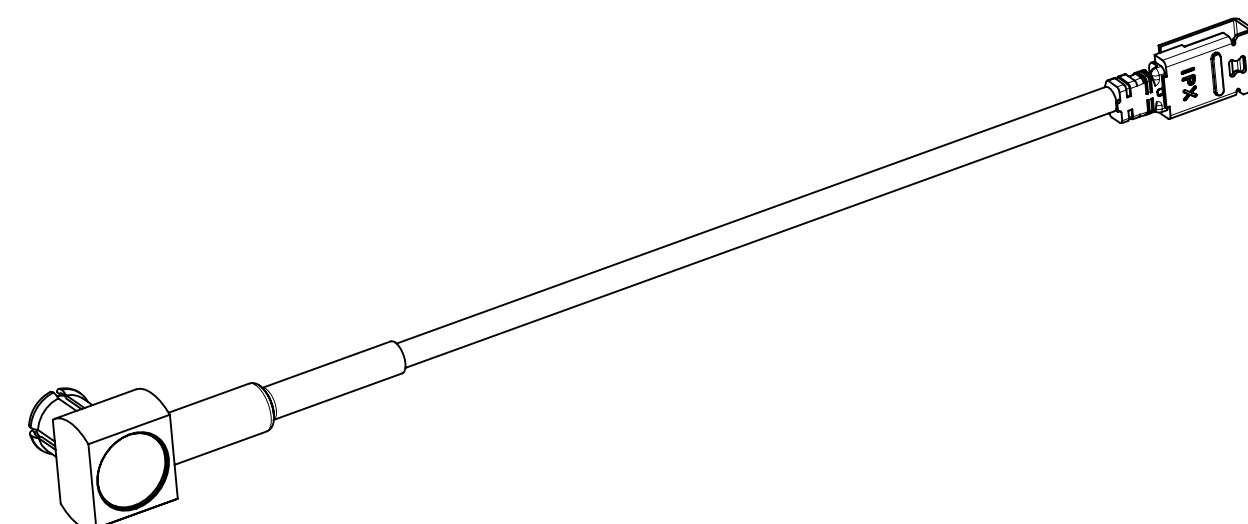

PART # 73230-6150

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	DIMENSION UNITS	SCALE	CURRENT REV DESC:
$\frac{F}{A} = 0$	MM/INCH	4:1	EC NO: 721426 DRWN: YHUANG11 2022/07/20 CHK'D: MYLU07 2022/09/19 APPR: LCHEN03 2022/09/22
$\frac{F}{C} = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)		
$\frac{F}{P} = 0$	ANGULAR TOL	± °	INITIAL REVISION: DRWN: YHUANG11 2022/07/20 APPR: LCHEN03 2022/09/22
DIVISIONAL SYMBOLS	4 PLACES	±	
	3 PLACES	±	DOCUMENT NUMBER <b>732306150</b>
	2 PLACES	±	
	1 PLACE	±	DOC PART 000
	0 PLACES	±	REVISION <b>A</b>
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION	DRAWING	MATERIAL NUMBER
		C-SIZE	73230-6150
		SERIES	CUSTOMER
		<b>73230</b>	GENERAL MARKET
			SHEET NUMBER
			1 OF 1

**molex**

CA, MCX PLUG R/A TO MHF® ? LK  
WITH DIA 1.37MM CABLE,50 OHMS,EWR#: 15303-A

PRODUCT CUSTOMER DRAWING

DOCUMENT STATUS	P1	RELEASE DATE	2022/09/22	07:56:03
-----------------	----	--------------	------------	----------