


REV. 1 7/9/92

COIL: @ 25°C	
RESISTANCE	600 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.0 VDC
MUST RELEASE	1.5 VDC

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	100 g's 6 ± 1 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: _____

CUSTOMER DATA SHEET

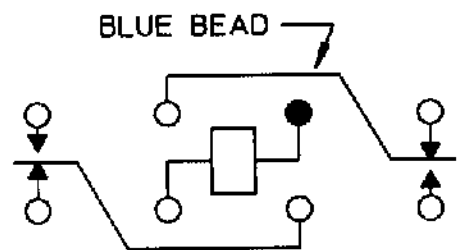

CONTACT RATING: 5 AMPS 30 VDC
 RESISTIVE 1 AMP 30 VDC INDUCTIVE
 100,000 OPERATIONS

DR. R.B. 7/9/92 CK: 7/9/92



CUST. HI-G
 CUST. NO. 28N-2A-126

TYPE FW5A RELAY

FW5A1201S04