

SUMMARY

Wires

Low voltage 114



Image is for illustrative purpose only

Series	5M
Termination type	Male crimp
IP rating	68 mated (mating interface)
AWG wire size	26.00 - 22.00
Cable Ø	14.25 - 28.50 mm
Status	active
Matching parts	EGR.5M.114.XLM

Download

[Request a quote](#)

[Eplan](#)

[Catalog](#)

TECHNICAL DETAILS

Mechanics

Shell Style/Model	FG*: Straight plug with arctic grip and mold stop
Keying	5 keys (alpha=105, beta=115, gamma=30, delta=20, plug: male contacts, receptacle: female contacts)
Housing Material	Aluminium (nickel plated [SAE AMS QQ N 290], anthracite color) shell and nut, other pieces bronze/brass
Weight	49.95 g

Performance

Configuration	5M.114 : 114 Low Voltage
Insulator	L: PEEK
Rated Current	2 Amps

Specifications

Test voltage (kV rms) Contact-contact: 1.37
Test voltage (kV rms) Contact-shell: 1.34


Others

Temp (min / max): -20°C / +200°C
Humidity (max): 21 days at 95%

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Gunfire vibration: 25 Hz - 2000 Hz, 3 axis (Apache helicopter)
Vibration-Sine: 30 g, 3 axes, 12 hr [10 Hz - 2000 Hz]
Vibration-Random: 37.8 g rms - 3 axes, 4 hr amb [50 Hz - 2000 Hz]
Shock Resistance: 300 g [3 ms]
Lighting strike EIA 364-75: 10K amps - 6 times
Thermal shock: 5 cycles: -65°C to +150°C
EMI Shielding EIA 364-66A: >= 80 dB (1 GHz), >=70 dB (3 GHz), >= 58 dB (6 GHz), >= 40 dB (10 GHz)
Salt Spray Corrosion: max. 48 hr

DRAWINGS

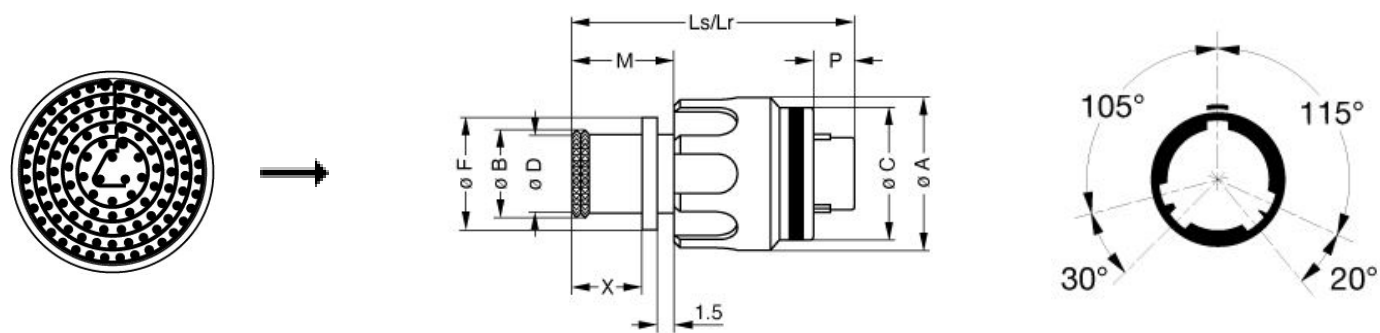

Dimensions

	A	B	C	D	F	Lr	Ls	M	P	X
mm.	34.9	29.7	33.5	28.5	31.4	31.6	31.6	10.6	3.4	7.6
in.	1,37	1,17	1,32	1,12	1,24	1,24	1,24	0,42	0,13	0,30

RECOMMENDED BY LEMO

Tools

- Crimp Tool:
[DPC.91.701.V](#)
- Crimp settings:
AWG/Selector = 22-24-26/6-5-5
- Positionner:
[DCE.91.070.5MVC](#)
- Extractor:
[DCF.93.070.4LT](#)

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Replacement contact: FGN.0M.555.ZZC

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.