

Timer

Timing

Function: On Delay

Selectable Timing Ranges:

Instantaneous

0.1 to 1 Sec.

1 to 10 Sec.

0.1 to 1 Min.

1 to 10 Min.

0.1 to 1 Hr.

1 to 10 Hrs.

Repeat Accuracy: 1%+20mSec.

Knob setting error: 10%

Reset Time: 100mSec. (Max.)

Electrical

Supply Voltages:

24, 120 & 240VAC, 50/60Hz

24, 48 & 110VDC

Power Consumption:

1.9VA @ 110VAC

2.1VA @ 220VAC

1.1W @ 24VDC

Contact Ratings

3 Amps @ 30VDC/240VAC


General Purpose

1 Amps @ 120 VAC

Inductive (Cos ϕ =.35)

1/4HP @ 240VAC Motor

Ordering Information

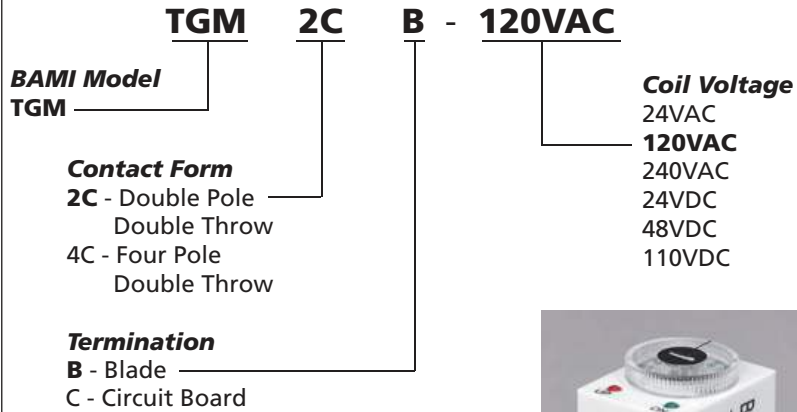

Environmental

Temperature Rating:

-10°C to 40°C

Life:

Mechanical:

50,000,000 Operations

Electrical:

600,000 Operations

Socket


Specifications

Current Rating: 5 Amps



Voltage Rating: 250VAC

Mounting: DIN or Surface

Connections

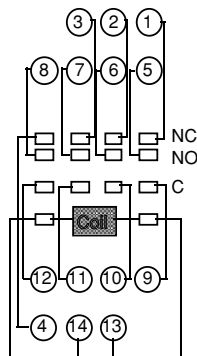

Dimensions

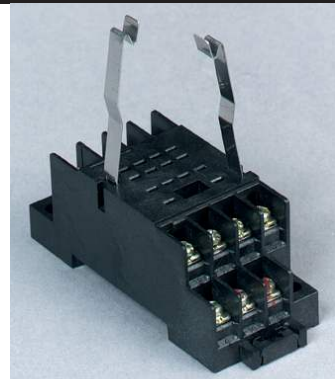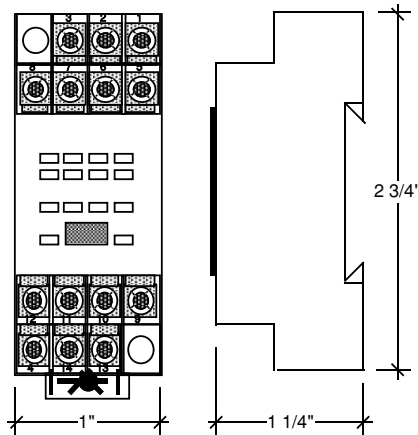

Ordering Information

