



## FLAT PANEL WIDE-BAND ANTENNA PA58

### 5150 TO 5825 MHZ OPERATION FLAT PANEL WIDE-BAND ANTENNA

The 5 GHz wide-band flat panel directional antennas by Laird offer high gain in a thin low profile package. The antennas are constructed of a gray color UV resistant ABS plastic radome with an aluminum backplate. The antenna can be used in horizontal or vertical polarization. The die cast aluminum bracket affords  $\pm 45^\circ$  up or down tilt adjustment and the stainless steel hardware assures a long service life. The antenna can be surface mounted or pole mounted. The antenna comes with an integral N female connector standard.


#### FEATURES

- High gain/low profile/wide-band
- Pole mount or surface mount
- Rugged and weatherproof
- Vertical or horizontal polarization
- Type N female connector

#### MARKETS

- 5 GHz wireless LAN applications
- Client antennas
- 802.11a applications
- OEM wireless data
- WiMAX

#### ANTENNA PATTERNS

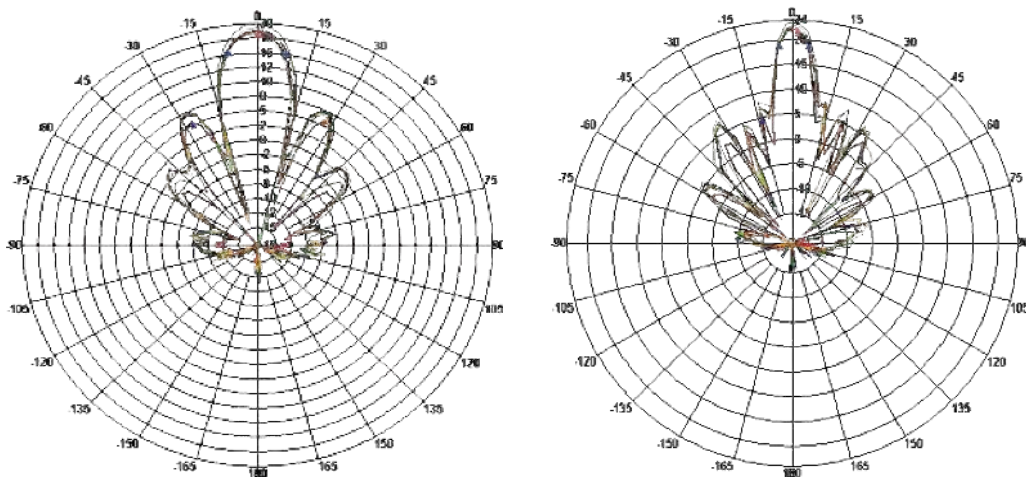

## SPECIFICATIONS

PARAMETER	MODEL	MIN	TYP	MAX	UNITS
Frequency Range		5150		5825	MHz
Gain	PA58-19 PA58-24		19 24		dBi
Horizontal Beamwidth	PA58-19 PA58-24		16 8		Deg
Vertical Beamwidth	PA58-19 PA58-24		16 8		Deg
Front to Back	PA58-19 PA58-24	30 40			dB
Cross Polarization		25			dB
VSWR	5150-5350 MHz 5470-5825 MHz		2.0:1 1.5:1		
Impedance			50		OHM
Input Power				100	W
Operating Temperature		-40		+70	°C
Pole Size		1 (25)		2.5 (64)	in (mm)
Weight	PA58-19 PA58-24		17.6 (0.5) 60 (1.7)		oz (kg)
Dimension (L x W x Thick)	PA58-19 PA58-24	7.5 x 7.5 x 0.8 (190 x 190 x 20) 15.4 x 14.6 x 0.8 (390 x 371 x 21)			in (mm)
Bracket Tilt			45		Deg

## WIND LOADING (LBS.)

MODEL	SQ.IN	100 MPH	125 MPH	100 MPH WITH ½ IN RADIAL ICE
PA58-19	56	14 lbs	22 lbs	14 lbs
PA58-24	163	41 lbs	64 lbs	41 lbs

## SYSTEM ORDERING INFORMATION

PA58-19 Wide-band 5.1 to 5.8 GHz 19 dBi flat panel directional antenna  
 PA58-24 Wide-band 5.1 to 5.8 GHz 24 dBi flat panel directional antenna

## NOTES

- All shipments F.O.B. Schaumburg, IL 60173



## TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

## te.com

TE, and TE connectivity (logo) are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

TE Connectivity warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations TE Connectivity will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the TE Connectivity product is installed. Useful lifetime of the original end product may vary but is not warranted to exceed one (1) year from the original date of the end product purchase.

©2022 TE Connectivity. All Rights Reserved.

08/22 Original