



© COPYRIGHT 2012 BY INDUSTRIAL FIBER OPTICS, INC.  
ALL RIGHTS RESERVED.

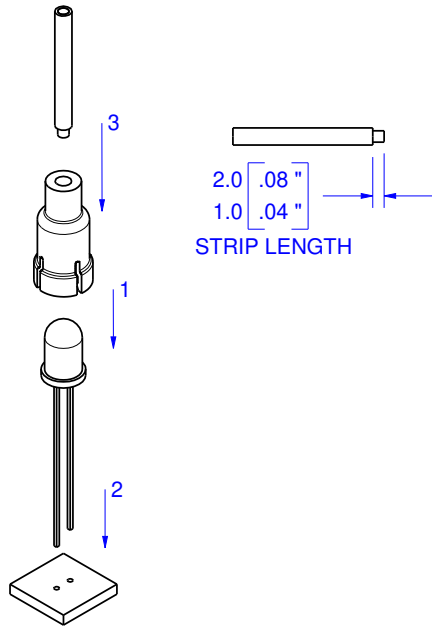


- NOTES:**
1. RoHS COMPLIANT
  2. UL94 HB FLAMMABILITY RATING
  3. -40° C TO 85° C OPERATING TEMPERATURE
  4. SUITABLE FOR 2.2mm OR 3mm JACKETED LIGHT PIPE WITH A FIBER DIAMETER UP TO 1.5mm
  5. DO NOT WAVE SOLDER WITH THIS DEVICE
  6. FOR BEST RESULTS USE ONLY NARROW VIEWING ANGLE NON-DIFFUSED LEDs WITH OUTPUT POWER GREATER THAN 100mcd
  7. NOT RECOMMENDED FOR DATA COMMUNICATIONS

REVISIONS					
REV	DESCRIPTION	ECO	DATE	DWN	APVD
A	Initial release		1/3/2012	BB	AR

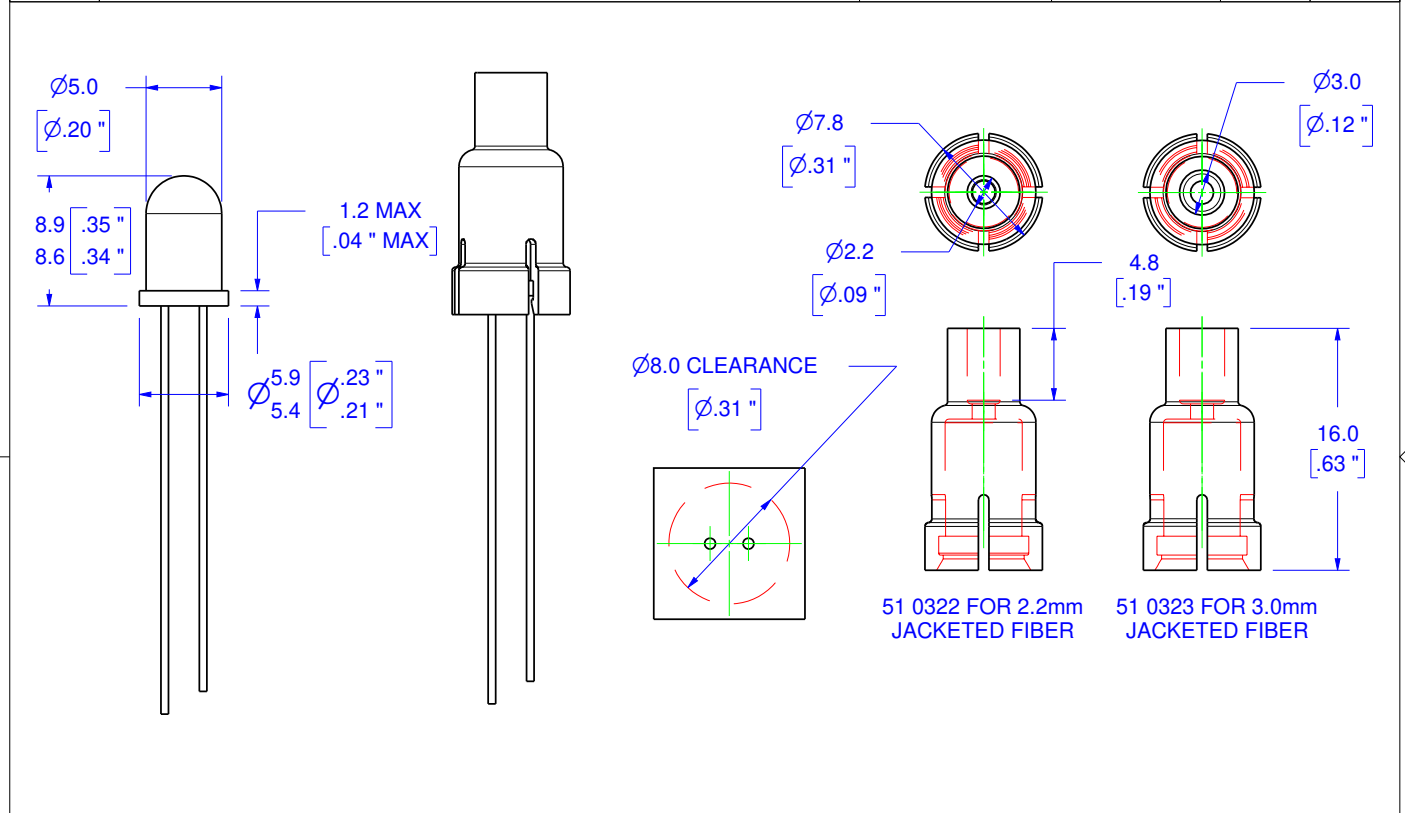

UNLESS OTHERWISE SPECIFIED DIMENSIONS MILLIMETERS [IN.]	PRODUCT	Industrial Fiber Optics TEMPE, AZ 85281				
	MATERIAL					Black Nylon 6/6
TOLERANCES 0 PLC: ± 1 SURFACE: 3.2 1 PLC: ± .25 TEXTURE: ✓ 2 PLC: ± .127 3 PLC: ± .025 4 PLC: ± .013 ANGLE: ± 1/2°	FINISH	NAME <b>T1-3/4 LED Cap</b>				
	DRAWN BY					B. Bidwell
	DATE					1/3/2012
	CHECKED BY					A. Reyes
REMOVE BURRS AND SHARP EDGES FLATNESS .005mm PER mm ALL DIMENSIONS AFTER FINISH	DATE	1/3/2012	SIZE	SCALE	PART NUMBER	REV
			A	2:1	51 0322	A
			DO NOT SCALE DRAWING		Sheet 1 of 1	



**METRIC**