
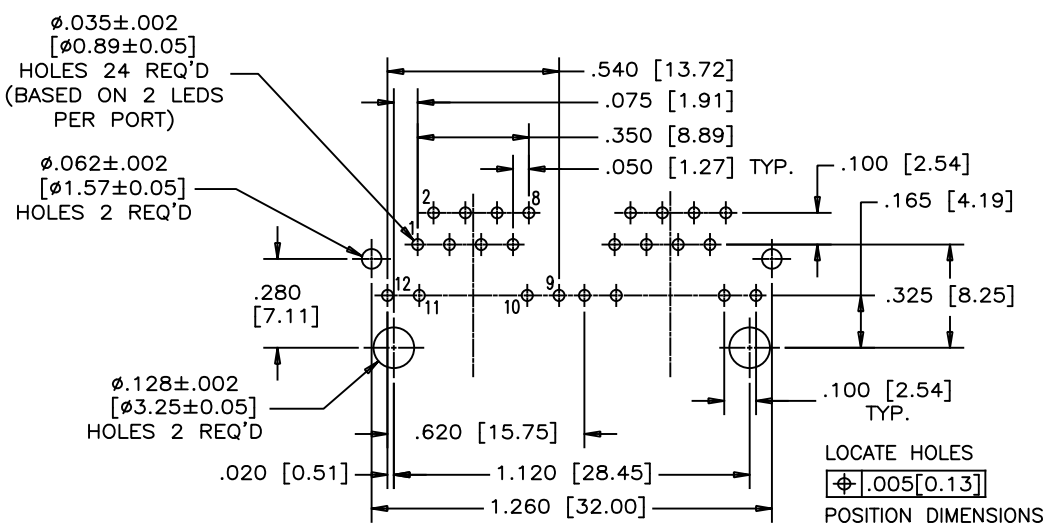
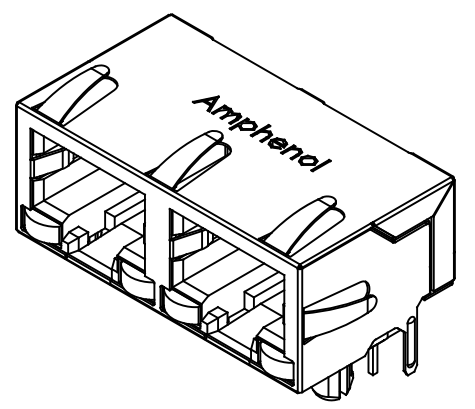
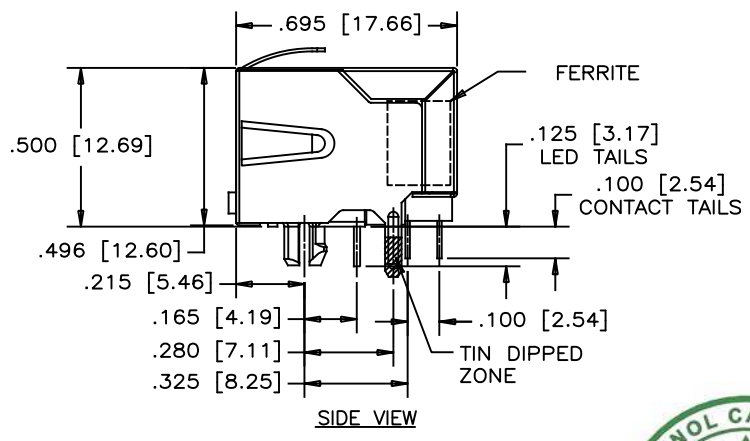


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	AUG17/20	L.CHAN

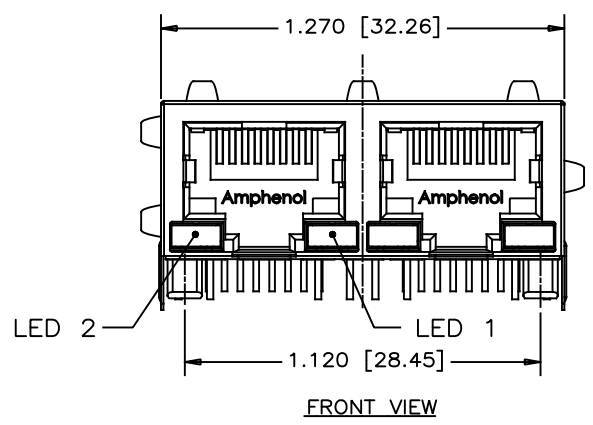

MATERIALS:
HOUSING: ENGINEERING THERMOPLASTIC. FLAMMABILITY RATING UL 94V-0, COLOR: BLACK

CONTACTS: PHOSPHOR BRONZE
PLATING: SELECTIVE GOLD PLATING ON MATING SURFACE, SEE PART NO. FOR THICKNESS.
 50µ" [1.27 MICRONS] MIN. NICKEL UNDERPLATE.
 100µ" [2.54 MICRONS] MIN. MATTE-TIN OR GOLD FLASH ON CONTACT TAILS.



SHIELD: COPPER ALLOY
PLATING: NICKEL WITH TIN FINISHED ON PCB TAILS.

RECOMMENDED SOLDERING TEMPERATURE:
 WAVE SOLDERING AT 260° MAXIMUM FOR 5~8 SECONDS.

AMPHENOL PART NUMBER: RJSBE-X28X-C2X

GOLD PLATING OPTIONS:
 D = 6µ" GOLD PLATING
 G = 15µ" GOLD PLATING
 J = 30µ" GOLD PLATING
 S = 50µ" GOLD PLATING


REFER TO LED OPTIONS DRAWING FOR ORDERING CODES, SEE PAGE 2

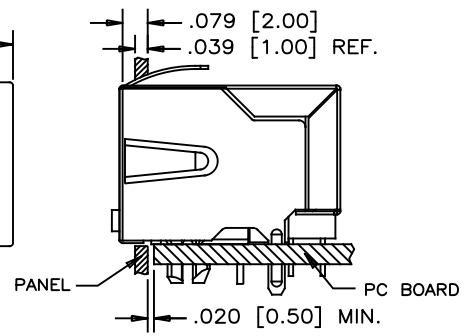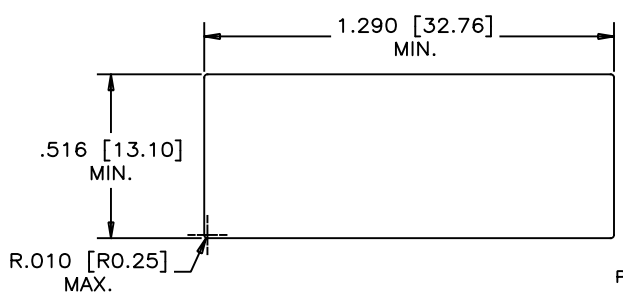


UNLESS SPECIFIED OTHERWISE	DRAWN RONNIE.C	AUG17/20	Amphenol Canada Corp. Commercial Products
PRIMARY UNITS INCHES	CHECKED KELVIN.T	AUG17/20	
SECONDARY MILLIMETERS	M.E. APP'D		TWO PORTS MODULAR JACK, WITH FERRITE, 8 POSITION, 8 CONTACTS, SHIELDED GOLD PLATING OPTION, WITH LED OPTIONS -RoHS COMPLIANT
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APP'D		
1 DECIMAL PLACE	ENG. REL. NO.		DWG NO.
2 DECIMAL PLACES	REF.		P-RJSBE-X28X-C2X
3 DECIMAL PLACES ±.015	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	REV A
ANGULAR DEGREES ±1.5°			CODE ID NO. 03554 DWG SIZE X SCALE N/A SHEET 1 OF 2

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	AUG17/20	L.CHAN

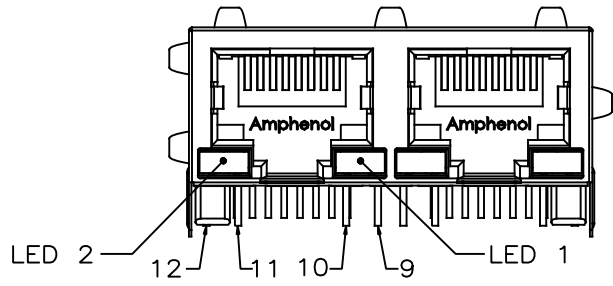

TYPICAL FOR SINGLE & MULTI-PORT

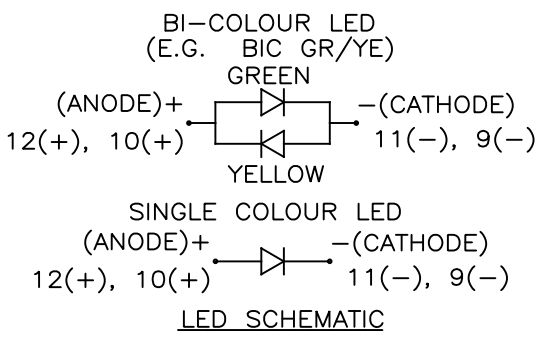

EXAMPLE:

PART NUMBER RJSBE-528X-C2

LED COLOR CODE

CODE	LED 2 (LEFT)	LED 1 (RIGHT)	CODE	LED 2 (LEFT)	LED 1 (RIGHT)	CODE	LED 2 (LEFT)	LED 1 (RIGHT)
0	BLOCKED	BLOCKED	9	GREEN	BLOCKED	J	BiC RD/GR	YELLOW
1	YELLOW	GREEN	A	BiC GR/YE	BiC GR/YE	K	YELLOW	BiC GR/OR
2	BLOCKED	GREEN	B	BiC RD/GR	BiC RD/GR	L	BiC GR/YE	RED
3	YELLOW	BLOCKED	C	BiC RD/GR	BiC GR/YE	M	RED	YELLOW
4	GREEN	YELLOW	D	GREEN	BiC GR/YE	N	BiC GR/RD	BiC GR/YE
5	GREEN	GREEN	E	YELLOW	BiC GR/YE	P	GREEN	BiC RD/GR
6	YELLOW	YELLOW	F	BiC GR/YE	YELLOW	R	BiC GR/OR	GREEN
7	RED	GREEN	G	BiC GR/OR	BiC GR/OR	T	RED	RED
8	GREEN	RED	H	BiC GR/YE	GREEN	V	BiC RD/GR	GREEN
			W	ADDITIONAL OPTIONS				

EXAMPLE OF ADDITIONAL LED OPTIONS:

PART NUMBER RJSBE-528W-C2X

ADDITIONAL LED COLOR CODE
DENOTES ADDITIONAL LED OPTIONS TO BE USED

CODE	LED 2 (LEFT)	LED 1 (RIGHT)	CODE	LED 2 (LEFT)	LED 1 (RIGHT)	CODE	LED 2 (LEFT)	LED 1 (RIGHT)
0	DO NOT USE		5	BLOCKED	YELLOW	A	LOWC YE	LOWC YE
1	RED	BLOCKED	6	RED	BiC RD/GR	B	LOWC YE	LOWC GR
2	BiC GR/OR	YELLOW	7			C	LOWC GR	LOWC YE
3	YELLOW	RED	8	BiC RD/GR	BLOCKED	D	LOWC GR	LOWC GR
4	BLOCKED	RED	9	BiC GR/YE	BLOCKED	M	LOWC RD	LOWC YE
						N	GREEN	BiC GR/OR
						E	GREEN	ORANGE
						F	ORANGE	GREEN
						P	BiC RD/YE	GREEN
						R	BiC RD/YE	BiC RD/YE



LED SPECIFICATIONS:

FORWARD VOLTAGE:
1.8~2.4 VOLTS.(FOR SINGLE COLORS)
2.6~3.4 VOLTS.(FOR BI-COLORS)
REVERSE VOLTAGE: 5.0 VOLTS MAX.
LUMINOUS INTENSITY:
6~60 mcd (FOR SINGLE COLORS) (AT If=20mA)
3~15 mcd (FOR BI-COLORS) (AT If=20mA)
OPERATING TEMPERATURE: -40°C TO 85° C
WAVE SOLDERING TEMPERATURE: 260° C
(5 SEC, 1/16" FROM CASE)
PLATING ON TAILS: TIN OR TIN/COPPER ALLOY
OVER SILVER

PRIMARY COLOR FOR BI-COLOR

LEDS IN STANDARD ANODE/
CATHODE CONFIGURATION IS:
RED-GREEN= RED
RED-YELLOW= RED
GREEN-YELLOW= GREEN
GREEN-ORANGE= GREEN

LEGEND

BiC=BI-COLOR LED
LOWC=LOW CURRENT LED
YE=YELLOW
GR=GREEN
RD=RED
OR=ORANGE

NOTE:

THE TWO DIGITS PRECEDING THE
ADDITIONAL LED CODE MUST BE
USED IN THE PART NUMBER, WHEN
ORDERING ANY OF THE ADDITIONAL
LED OPTIONS.

UNLESS SPECIFIED OTHERWISE	DRAWN RONNIE.C	AUG17/20	Amphenol Canada Corp. Commercial Products
PRIMARY UNITS INCHES	CHECKED KELVIN.T	AUG17/20	
SECONDARY MILLIMETERS	M.E. APP'D		TWO PORTS MODULAR JACK, WITH FERRITE, 8 POSITION, 8 CONTACTS, SHIELDED GOLD PLATING OPTION, WITH LED OPTIONS -RoHS COMPLIANT
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APP'D		DWG NO. P-RJSBE-X28X-C2X
1 DECIMAL PLACE	ENG. REL. NO.		
2 DECIMAL PLACES	REF.		REV A
3 DECIMAL PLACES ±.015	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	CODE ID NO. 03554 DWG SIZE X SCALE N/A SHEET 2 OF 2
ANGULAR DEGREES ±1.5°			