THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

REVISIONS									
REV.	DESCRIPTIONS	DATE	APPROVED						
_	CLASS A RELEASED	7/12/99							

1. ADAPTER, 4mm BANANA PLUG WITH 4mm BANANA JACK.

2. SPECIFICATIONS:

INSULATOR: POLYACETAL


PLUG BODY: BRASS, NICKEL PLATED

SPRING BODY: BERYLLIUM COPPER, NICKEL PLATED

3. RATING:

CURRENT: 10A MAX. RESISTANCE:  $< 0.8 \text{m}\Omega$ .

TEMPERATURE:  $-20^{\circ}$  C TO  $+80^{\circ}$  C.

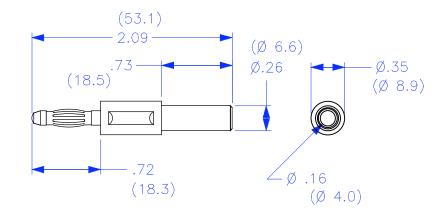

PART NUMBER
CT2473-#
T

COLOR: 0 - BLACK
2 - RED
4 - YELLOW
5 - GREEN
6 - BLUE

9 - WHITE

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED CONTRACT NO. DIMENSIONS ARE IN INCHES			al To	ot Elo	octroni	<u> </u>	22820 Savi Ranch Parkwa	ay	
		TOLERANCES ARE: FRACTIONS DECIMALS ± 1/32 .XX ± .02	APPROVALS DATE			Cal Test Electronics 22820 Sav Yorba Linda					4610
		.XXX ±.005 DO NOT SCALE DRAWING	DRAWN WDH	7/12/99	TITLE	4m	nm BANANA PLUG ADAPTER				
		MATERIAL	CHECKED		1	w/4mm JACK					
		FINISH	ENGR.		SIZE	CAGE CODE	<i>1</i> Γ	DWG. NO.	P2	247300	REV.
NEXT ASSY	USED ON		DESIGN ACTIVITY		Α	43F	45		1 2	277000	
APPLICATION			1		SCALE	1:1				SHEET 1 OF	1