



PC card drilling dimensions(after plating)  
(thickness 1.60 ±0.25 mm)

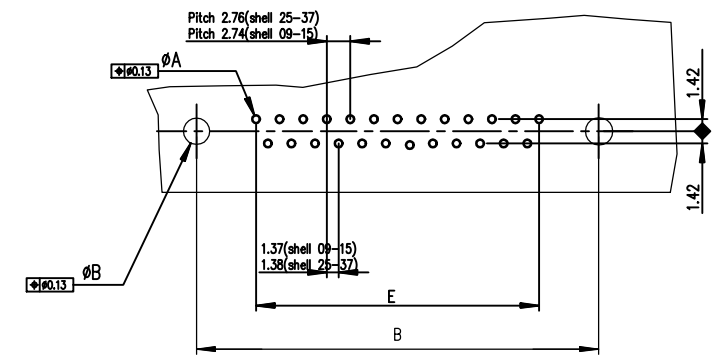

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER	PART NUMBER
09	30.81	24.99	18.00	16.21	10.96	D09S80C4PV00	D09S80C6PV00
15	39.14	33.32	26.32	24.54	19.18	D15S80C4PV00	D15S80C6PV00
25	53.03	47.04	40.04	38.25	33.12	D25S80C4PV00	D25S80C6PV00
37	69.32	63.50	56.50	54.71	49.68	D37S80C4PV00	D37S80C6PV00
						Gold flash	0,76 » gold

Detail of plastic pin

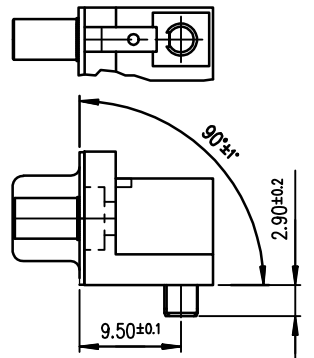

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:  
SEE DRAWING C01-8646-0001

mat'l. code		surface		tolerance		projection		product family		
-		ISO 1302 ✓		ISO 406 ISO 1101				D-SUB		
ltr	ecn no	dr	date	tolerances unless otherwise specified				title		
E	ELX-17859	MP	2014/06/06	angles	linear	MM		FEMALE CONNECTOR DELTA-D US RIGHT ANGLED PRESS FIT		
				0°±2'		scale 2:1		dwg no		
								sheet 1 of 1 size		
				dr	PESSON	1995/10/30			A3	
				engr	MITHUN PAUL	2014/06/06			C01-8646-0410	
				chr	ALIAS BABU	2014/06/06			type	
				appd	BIJU K PAUL	2014/06/06			Product Customer Drawing	
sheet	revision	E								
index	sheet	1								



Copyright FCI