

**Obsolete**

**M·C·C·**

Micro Commercial Components

Micro Commercial Components  
20736 Marilla Street Chatsworth  
CA 91311  
Phone: (818) 701-4933  
Fax: (818) 701-4939

## Features

- Oxide-Glass passivated Junction
- Bi-Directional protection in a single device
- Surge capabilities up to 80A@10/1000us or 250A@8/20us
- High Off-State impedance and Low On-State voltage
- Plastic material has UL flammability classification 94V -0

## Mechanical Data

- Case : Molded plastic
- Polarity : None cathode band denotes
- Approx Weight : 0.093grams

## Maximum Ratings

Characteristic	Symbol	Value	Unit
Non-repetitive peak impulse current	$I_{PP}$	80A	10/1000us
Non-repetitive peak On-state current	$I_{TSM}$	30A	8.3ms, one-half cycle
Operating temperature range	$T_{OP}$	-40~150°C	
Junction and storage temperature range	$T_J, T_{STG}$	-55~150°C	


## Thermal Resistance

Characteristic	Symbol	Value	Unit
Thermal Resistance junction to lead	$R_{\theta JL}$	20°C/W	
Thermal Resistance junction to ambient	$R_{\theta JA}$	100°C/W	On recommended pad layout
Typical positive temperature coefficient for breakdown voltage	$\Delta V_{BR}/\Delta T_J$	0.1%/°C	

**TSMBJ050 5C-064**


**Transient Voltage Protection Device 58 Volts**

**DO-214AA (SMB)**

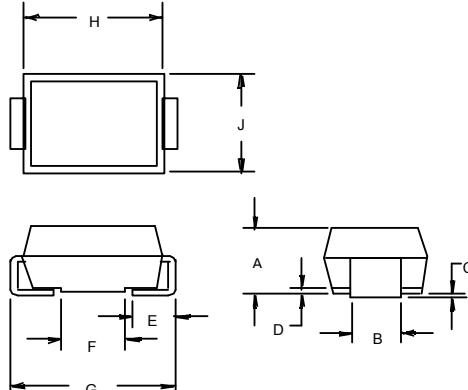

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.078	.096	2.00	2.44	
B	.077	.083	1.96	2.10	
C	.002	.008	.05	.20	
D	---	.02	---	.51	
E	.030	.060	.76	1.52	
F	.065	.091	1.65	2.32	
G	.205	.220	5.21	5.59	
H	.160	.180	4.06	4.57	
J	.130	.155	3.30	3.94	

SUGGESTED SOLDER PAD LAYOUT

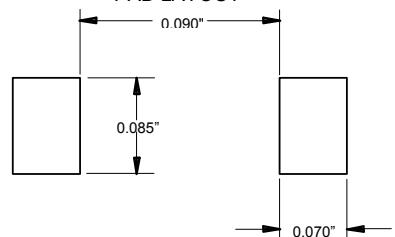


[www.mccsemi.com](http://www.mccsemi.com)

ELECTRICAL CHARACTERISTIC @ $25^{\circ}\text{C}$  Unless otherwise specified


Parameter	Rated Repetitive Off-state Voltage	Off-state Leakage Current@ $V_{\text{DRM}}$	Breakover Voltage	On-State Voltage @ $I_f=1.0\text{A}$	Breakover Current	Holding Current	Off-State Capacitance
Symbol	$V_{\text{DRM}}$	$I_{\text{DRM}}$	$V_{\text{BO}}$	$V_T$	$I_{\text{BO+}}$	$I_H$	$C_J$
Units	Volts	uA	Volts	Volts	mA	mA	pF
Limit	Max	Max	Max	Max	Max	Min	Typ.
TSMBJ0505C-064	58	5	77	5	800	150	140

## MAXIMUM RATED SURGE WAVEFORM

Waveform	Standard	I <sub>PP</sub> (A)
2/10 us	GR-1089-CORE	250
8/20 us	IEC 61000-4-5	250
10/160 us	FCC Part 68	150
10/700 us	ITU-T K20/21	100
10/560 us	FCC Part 68	100
10/1000 us	GR-1089-CORE	80

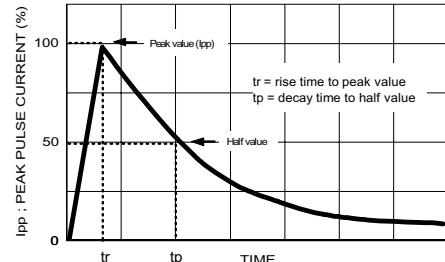

Symbol	Parameter
$V_{\text{DRM}}$	Stand-off voltage
$I_{\text{DRM}}$	Leakage current at stand-off voltage
$V_{\text{BR}}$	Breakdown voltage
$I_{\text{BR}}$	Breakdown current
$V_{\text{BO}}$	Breakover voltage
$I_{\text{BO}}$	Breakover current
$I_H$	Holding current
$V_T$	On state voltage
$I_{\text{PP}}$	Peak pulse current
$C_O$	Off-state capacitance

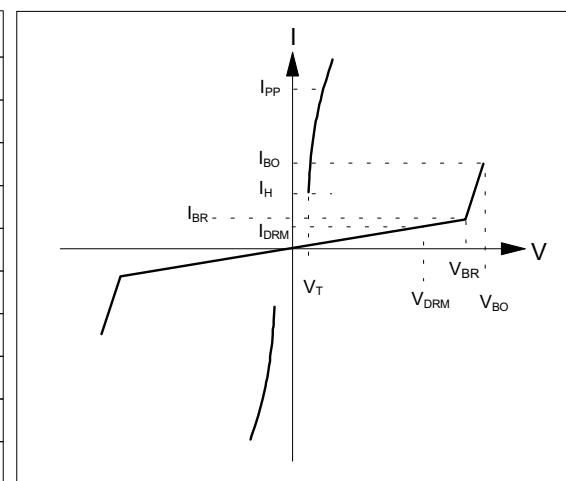







NOTE :

1.  $I_H > (V_L / R_L)$  If this criterion is not obeyed, the TSPD triggers but does not return correctly to high-resistance state.  
The surge recovery time. It does not exceed 30ms.
2. Off-state capacitance measured at f=1.0MHz , 1.0Vrms signal , VR=2Vdc bias.

# TSMBJ0505C-064

•M•C•C•

Micro Commercial Components

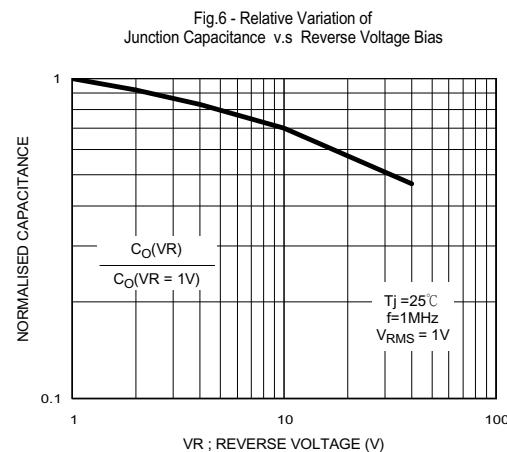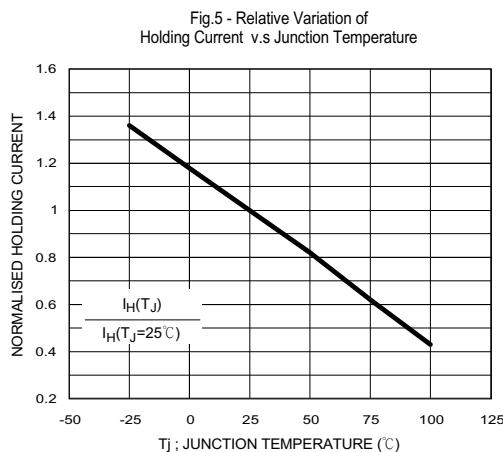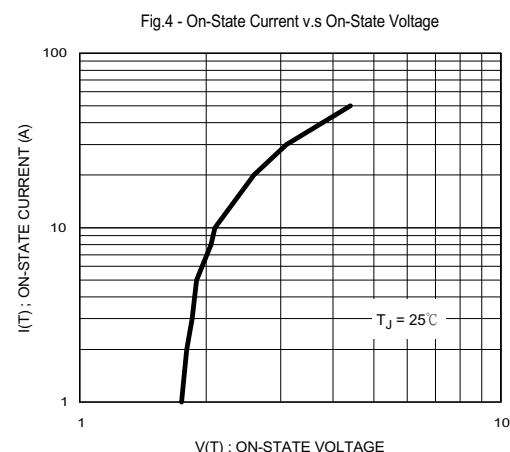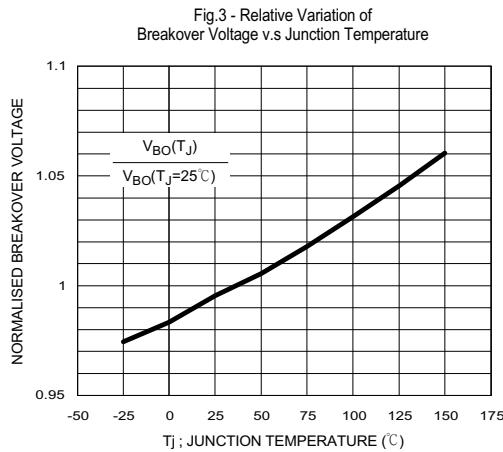
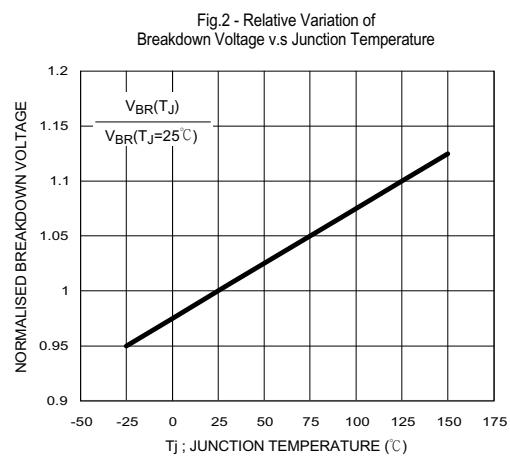
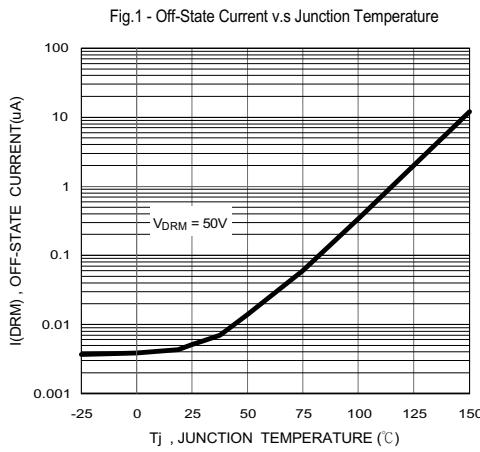


TSMBJ0505C-064

TYPICAL APPLICATION CIRCUITS

•M•C•C•

Micro Commercial Components™

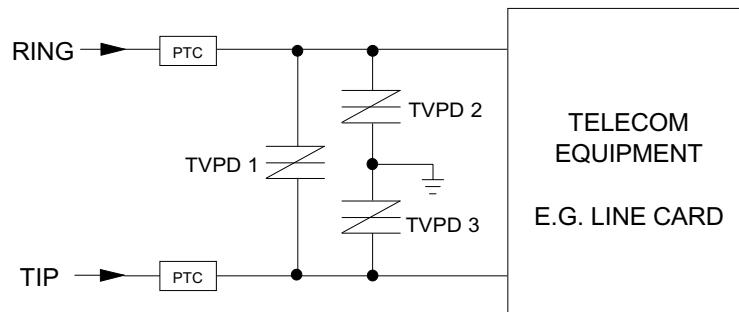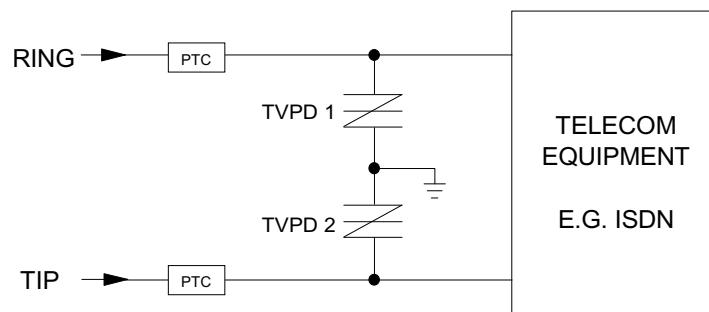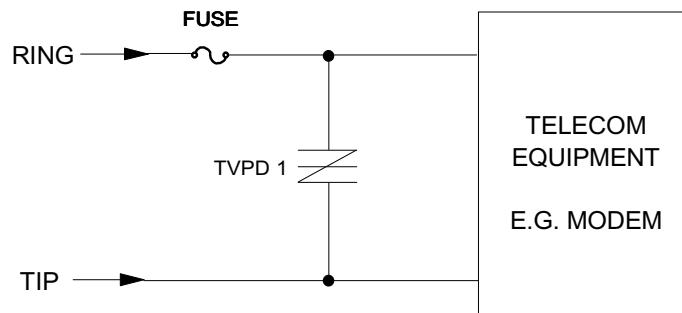

The PTC (Positive Temperature Coefficient) is an overcurrent protection device.