


LTR	DESCRIPTION	DATE	BY
-	Released	6/14/00	JCL

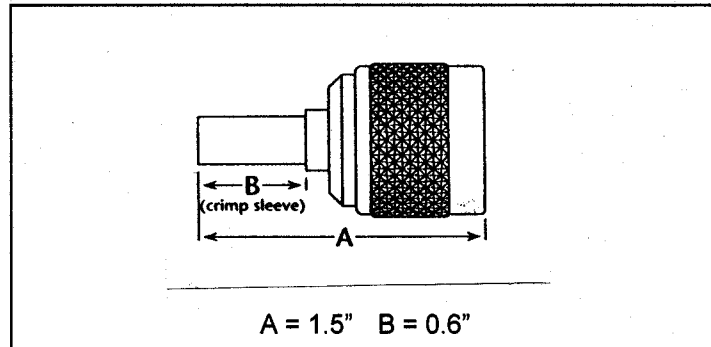

**I. MATERIALS & FINISHES**

- center contact: Gold Plated Beryllium Copper – female pin
- outer contact: Nickel Plated Brass
- body: Nickel Plated Brass
- coupling nut: Nickel Plated Brass
- crimp sleeve: Nickel Plated Copper
- dielectric: Teflon® PTFE
- gasket: Silicone Rubber
- shrink sleeve: Adhesive Lined Polyolefin
- crimp size: .429" hex

**II. ELECTRICAL PROPERTIES**

- impedance: 50 ohms
- working voltage: 1000 vrms (max)
- vswr: 1.25:1 (max) up to 3 GHz
- insertion loss: 0.1 x √Fghz

Unless otherwise specified, dimensions are in inches. Tolerances are applicable when specified.

These drawings and specifications contain proprietary information which is the property of Times Microwave Systems.

**Approvals**

Drawn	JCL	6/14/00



**TIMES MICROWAVE SYSTEMS**

Wallingford, CT 06492  
 (203) 949-8400; (203) 949-8423.Fax  
 www.timesmicrowave.com

**TC-400-NM-RP**

Reverse Polarity Type-N Male (female pin)  
 for LMR-400 Cable

Size A	CAGE CODE 68999	Drawing No.: 3190-960
--------	--------------------	--------------------------

Scale: NA	Rev. ( )	Sheet: 1 of 1
-----------	----------	---------------