

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91 929



SWITCH - BASIC

CATALOG LISTING

V3-1075

CK-L7500

CATALOG LISTING
V3-1075
PAGE 1 OF 1
RELEASE NO. PR-5913
REPLACES
CHECK
ISSUE
12

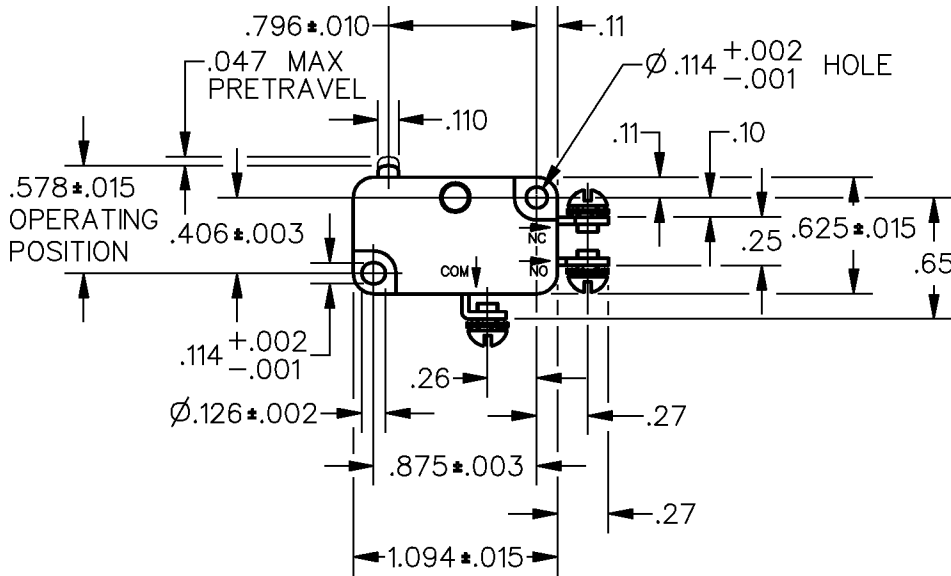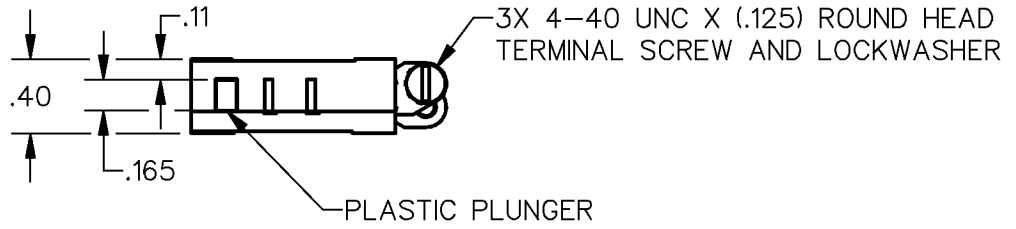

REVISIONS


| | | |
|---|----------|-----------|
| A | OBS | CO77905 |
| | DAW | 18 JUL 94 |
| B | RE-INS | CO82848 |
| | DCS | 18 JUL 96 |
| C | CO-93311 | |
| | TSM | 21 OCT 98 |
| D | 0005782 | |
| | R J | 04 JUN 04 |

NOTES

- 1 - IN INSPECTION, DO NOT BURN OUT - GOLD CONTACTS
- 2 - IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD
- 3 - INSPECT SWITCH RESISTANCE PER CONTROL PLAN

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



| CHARACTERISTICS | ELECTRICAL DATA | SCALE FULL | DO NOT SCALE PRINT |
|-------------------------------------|--------------------------------|--|--------------------|
| OPERATING FORCE — — — 6-14 OZ MAX | CONTACT ARRANGEMENT S P D T | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE | |
| RELEASE FORCE — — — — — 4 OZ MIN | L22 1A 125 VAC | ONE PLACE (.0) ± .030 | |
| DIFFERENTIAL TRAVEL — — — .006-.016 | | TWO PLACE (.00) ± .015 | |
| OVERTRAVEL — — — — — .040 MIN | | THREE PLACE (.000) ± .005 | |
| FREE POSITION — — — — — .625 MAX | | ANGLES ± | |
| RELEASE TRAVEL — — — — — .007 MIN | | WEIGHT | |

FORMTEK
DRAWN
DCS 18 JUL 96
CHECK
AK
04 JUN 04
CHECK

