
PROPRIETARY INFORMATION:

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION									
REV	DESCRIPTION	DATE	APPROVED						
A	INITIAL RELEASE, RFS. 18746, EM	05/24/10	BS						

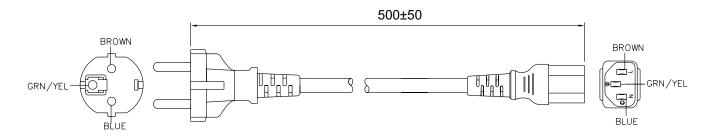

GENERAL SPECIFICATIONS:

RATING: 10A / 250V AC

H05VV-F, 3 x 1.0 mm² CABLE TYPE / SIZE:

TEMPERATURE RATING: 70° C

CONDUCTOR COLORS: BROWN / BLUE/ GREEN-YELLOW

CABLE JACKET COLOR: **BLACK** OVERALL LENGTH (L): 500 ± 50 mm CABLE OUTER DIAMETER: $7.1 \pm 0.2 \text{ mm}$ END 'A' PLUG: CEE 7/7 END 'B' IEC 320 / C13

VDE, N, S, D, FI, KEMA, UTE, CEBEC, OVE, IMQ APPROVALS PLUG:

VDE, N, S, D, FI, KEMA, SEV, CEBEC, OVE APPROVALS CABLE:

APPROVALS CONNECTOR: VDE, N, S, D, FI, KEMA, UTE, CEBEC, OVE, IMQ, ASEV

NOTES:

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).









2. PLUG AND CONNECTOR ARE BOTH ON THE SAME SIDE OF THE HANK.


	Foot Note:		
	Globtek Inc. will not be liable for the		
	safety and performance of these power		
Contents of this document	product if unauthorized access and repair		
are subject to change without	occurs. End user should consult the applica-		
prior notice	ble UL,CSA or EN Standards for proper		
	installation instruction.		

Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

DASH

PACKING:

HANKING





NO.		PART NO	REV.		DESCRIPTION			NOTES			
TABULATION BLOCK											
			TOLER DECIMALS .xx +/- 0.1 .xxx +/005	186 Veterals Dr. 186 Ve			186 Veterans Dr. No Tel. 201-784-1000				
INIT.BY:	EM	DATE: 05/24/10	MILLIMETERS .xx +/- 0.3 .xxx +/013	.xx +/- 0.3 +/- 1* DWG IIILE: EUROPEAN POWER CORD. 0.5 METER							
DRAWN	: NF	DATE: 05/24/10	FSCN No.: G, CC	SIZE A				REV. A			
APRVD:	НМ	DATE: 05/24/10	SCALE: NONE		PART NO:	23144270M5701-	T(R)	SHEET 1/1			