


CUSTOMER PRINT

CARA6A808PXXX90

PART NUMBER:

- FINISHED PRODUCT TO BE COILED
 OVERMOLD BOOT MATERIAL: PVC, BLACK
 ELECTRICAL TEST: 100% CONTINUITY
 ALL DIMENSIONS ARE REFERENCE EXCEPT THOSE WITH A TOLERANCE

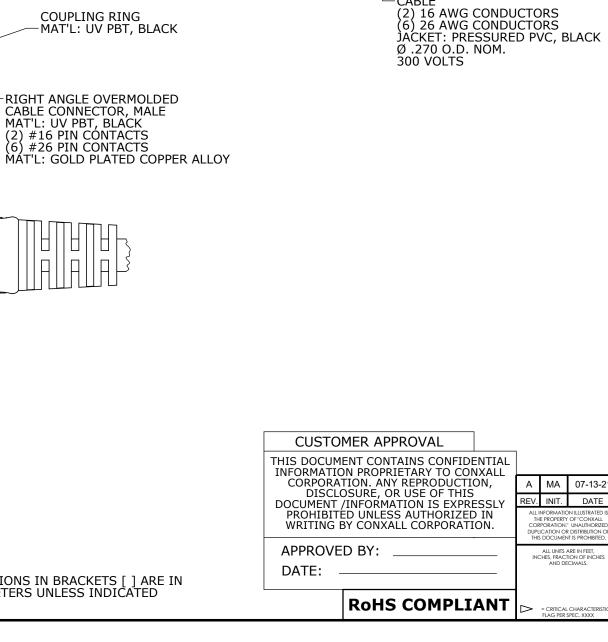

"X" DIM

	WIRE COLOR CODE							
POS. 1	POS. 2	POS. 3	POS. 4	POS. 5	POS. 6	POS. 7	POS .8	
BLK	WHT	BRN	RED	YEL	GRN	GRY	BLU	
16 AWG	16 AWG	26 AWG	26 AWG	26 AWG	26 AWG	26 AWG	26 AWG	

DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS UNLESS INDICATED

1.895 [48.1]

(conxall

-

15

[\]6 12

END "A" FACE VIEW

KEY

1.510 [38.4]

O-RING⁻ MAT'L: SILICONE, RED

Н


H

Π

A

ASS'Y P/N	"X" DIM			
CARA6A808P03990	3 FT. 3 1/2 IN. ±2 IN. [1M ±50.8mm]			
CARA6A808P07990	6 FT. 7 IN. ±2 IN. [2M ±50.8mm]			
CARA6A808P19790	16 FT. 5 IN. ±4 IN. [5M ±101.6mm]			
CARA6A808P39490	32 FT. 9 3/4 IN. ±8 IN. [10M ±203.2mm]			
CARA6A808P <u>XXX</u> 90				

CABLE CUT LENGTH IN "INCHES"





CABLE

A	MA	07-13-21	DRAWIN	DRAWING CREATED PER DOR 21-109361DS								
EV.	INIT.	DATE	DESCRIP	TION								
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION." UNAUTHORIZED			ORIG. DRAWN BY: DATE: MA 07-13-21									
DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			CHECKED BY:			SONZISII						
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.						601 E. WILDWOOD VILLA PARK, IL 60181						
			APPROVED BY:			TITLE: CABLE ASSEMBLY, RA 2#16/6#26 PIN CONTACTS						
			scale NTS	size B	sheet 1 OF 1	MIN-CON-X MIXED SIGNAL FLEX OM CUSTOMER: STANDARD PRODUCT						
= CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX			FILE: CARA6A808	PXXX9	DIRECTORY: 0 SLW	PART NUMBER: CARA6A808PXXX90	REV A					