


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00056	Connector, dc plug, 3.5x1.35xL20mm, molding style, spring contacts, black insulator	1	
2	50-00057	Connector, dc jack, 3.5x1.35xL16.5 mm, molding style	1	
3	30-00003	Wire, 2C BC, 24 AWG, UL2468, 300V, 80C, 3.6 mm, VW-1, PVC, 76A	1	
4	24-00002	Overmold, PVC, black	1	
5	24-00005	Overmold, PVC, black	1	

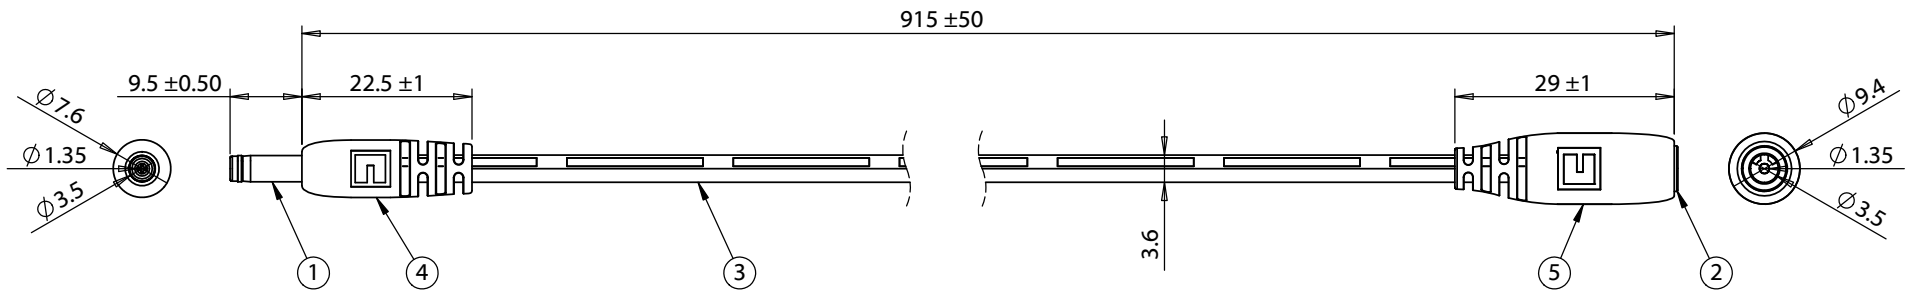

Wiring diagram		
50-00056	Wire Color	50-00057
Center	Black with stripe	Center
Sleeve	Black	Sleeve

REVISION	DATE	DESCRIPTION	PREPARED:	NOTES	<h1>TENSILITY</h1> <p>20802 Sockeye Place #130 Bend, OR 97701 USA tel 541.323.3228 fax 541.323.4202 800 877.670.7118 www.tensility.com</p>		
A	6/27/2012	Initial release	GL 2016.01.06 15:27:19 -08'00'	RoHS compliant Function test: no open, no reversed polarity, no short circuit, no INT 4 A, 12 Vdc Functionally equivalent components may be used			
			LA <small>Digitally signed by LA DN: cn=LA, ou=Tensility, ou=Engineering, email=la@tensility.com, c=US Date: 2016.01.19 13:52:59 -0800</small>	DESCRIPTION: Cable, 915 mm, 3.5x1.35x9.5 mm 50-00056 dc plug to 3.5x1.35 mm 50-00057 jack, 24 AWG, 30-00003 wire	SIZE A	PART NUMBER 10-01079	
			DIMENSIONS ARE IN MILLIMETERS TOLERANCES: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm		SCALE: 1:1	WEIGHT:	SHEET 1 OF 1