



Que-2-TXT™  
Questions?  
scan to text us fast



LED SATELLITE

ADJUSTABLE GARAGE / SHOP LIGHT



specifications

Consumption	Voltage	CRI	Lens	Heat Sink	L70 Hours	Ambient Temp (F)	Power Factor	UL Listing	THC	Beam Angle
100 W	100 - 277 V ⚡	> 80	clear polycarbonate	aluminum	20,000	-40° - 113°	> 0.9	damp location	< 20%	omni-directional

select your lamp

Part Number	Color Temp	Base	Lumen Output	Efficacy
GI-GSL-D400-UL4	4000K	E26	12,000	120 lm / W



other

Dimensions	Warranty	Case QTY
5.59" x 5.59" x 4.92"	6 years	27 pcs



Features

- 2 Year warranty
- 20,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations
- Panels adjust to illuminate up to 270°

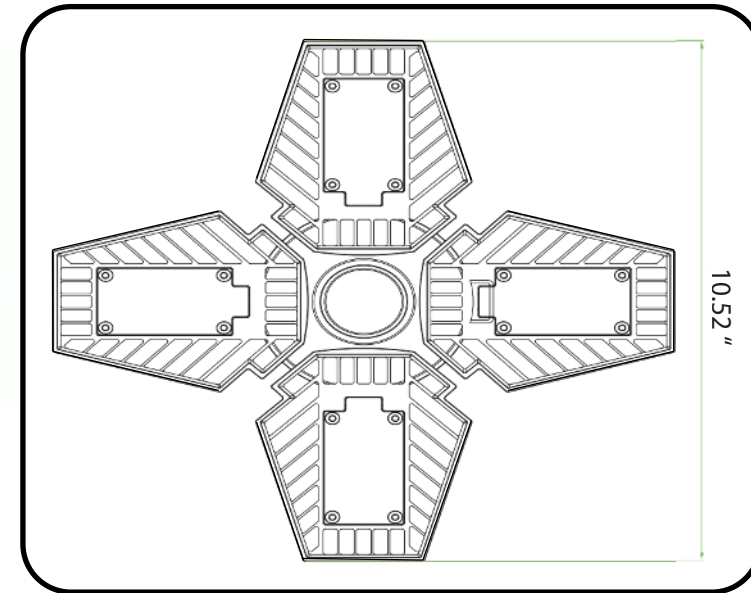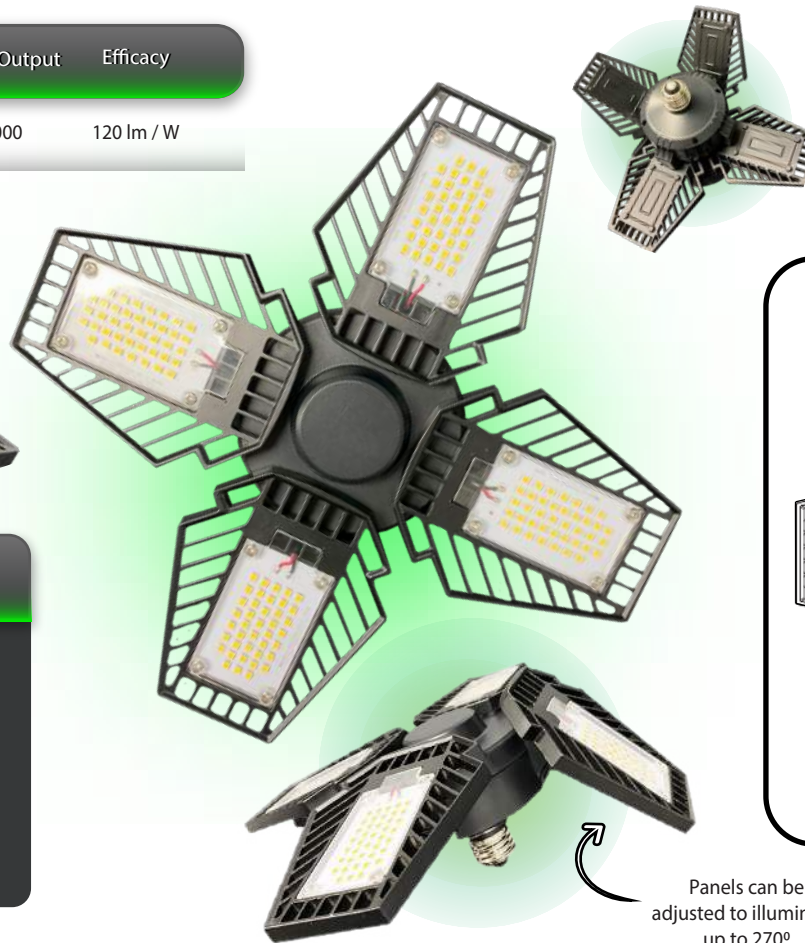

Panels can be adjusted to illuminate up to 270°

Not all product variations listed on this page may be DLC qualified. Visit [www.designlights.org/search](http://www.designlights.org/search) to confirm qualification.



/greenignite  
@greenignite



[www.greenignite.com](http://www.greenignite.com)



[info@greenignite.com](mailto:info@greenignite.com)



1-877-560-3779