

NOTES:

1.0 ELECTRICAL SPECIFICATIONS.

1.1 FREQUENCY RANGE: DC to 4.0 GHz

1.2 VSWR (MAX):

DC to 2.0 GHz: 1.15:1

2.0 to 4.0 GHz: 1.25:1

1.3 MAXIMUM INPUT POWER:

0.5 WATTS MAX AT +25°C

1.4 IMPEDANCE: 50 OHMS


1.5 TEMPERATURE RANGE:

-65°C to +125°C

2.0 MARKING: MARK UNIT AS SHOWN.

(REF.: INK-02638-27-23)

3.0 DIMENSIONS IN BRACKETS ARE IN MILLIMETERS.

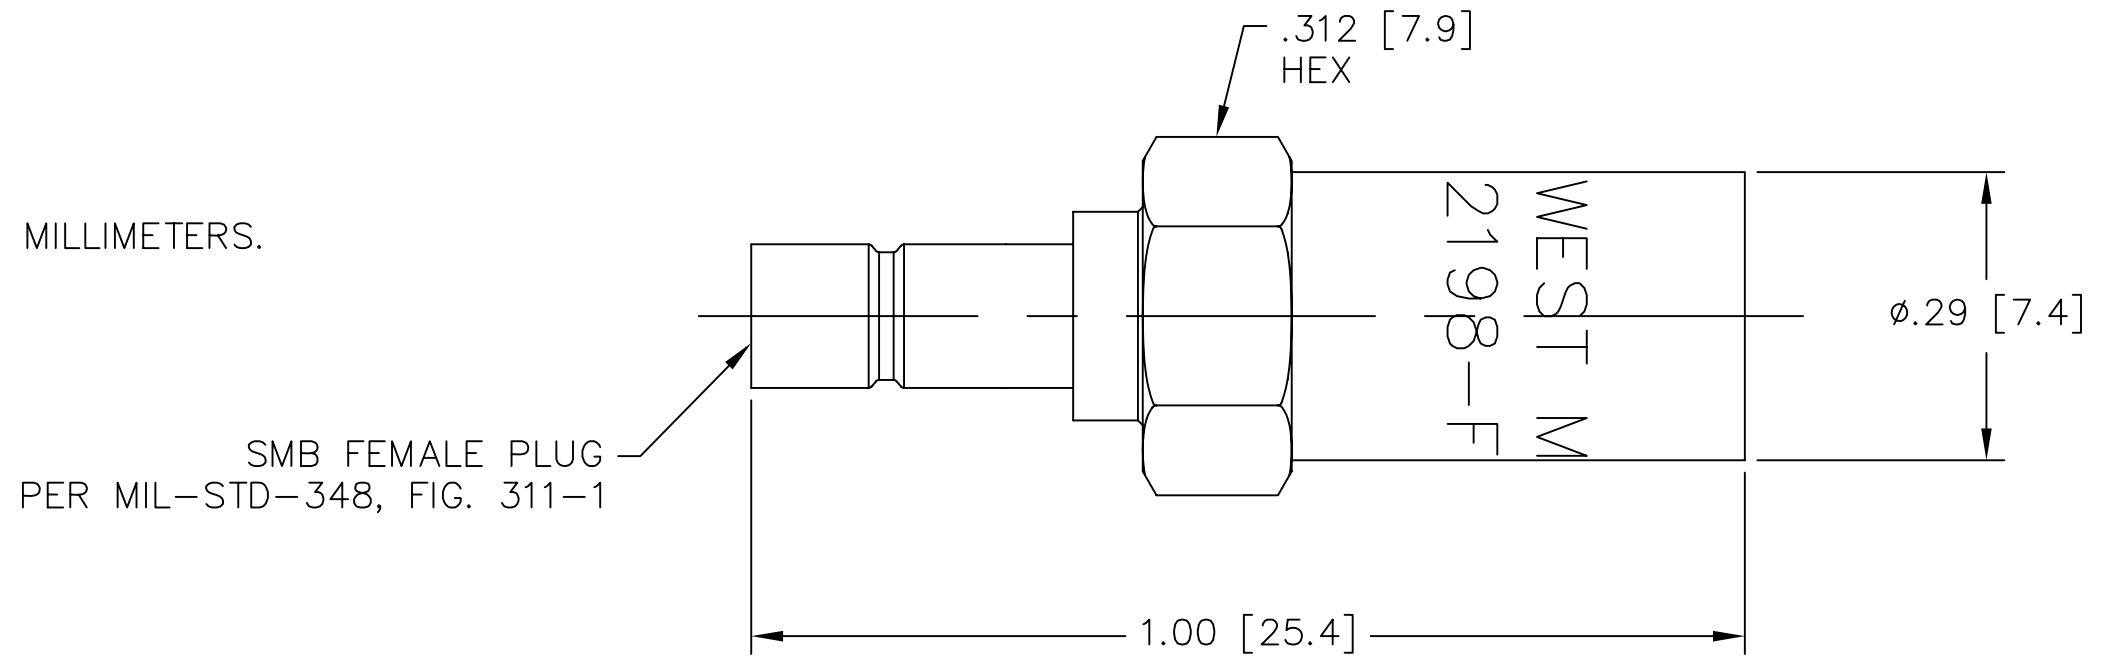

MODEL NUMBER	TRM-2198-FO-SMB-02
REV.	A

REV.	DESCRIPTION	DATE
-	RELEASED	3/20/01
A	ECN 19829	5/14/04

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:	FSCM NO.		34078		MIDWEST MICROWAVE	
	3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°				NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave	
DRAWN/DATE M. STAFFORD 2/26/01			ENG./DATE G.KOZAK 3/19/01			TITLE TERMINATION - SMB FEMALE PLUG
CHECKED/DATE			APPROVED/DATE			DRAWING NUMBER TRM-2198-FO-SMB-02
SCALE: 5=1			SHEET 1 of 1			