

## Electronic housing - ME MAX 22.5 3-3 KMGY - 2713939

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Electronic housing consisting of: Housing shells left and right, front plate, transparent cover, metal foot catch and spring, open housing, 24-pos. (6 x 4 pos.), width: 22,5 mm, color: Light gray

The illustration shows the housing versions

### Why buy this product

- DIN rail bus connector as an option
- Plug-in connection with screw, spring-cage or fast connection technology
- Labels for additional labeling as an option
- Large PCB surface despite compact housing dimensions
- Large front surface for high-pos. plugs or operating and setting elements
- Easy module replacement without interrupting the contact chain
- The fitted cover is easy to adapt and print
- Transparent front cover can be swiveled
- Fixed or plug-in connection technology can be combined on up to three connection levels, with different pitches
- Functional earth ground contact as an option



### Key commercial data

Packing unit	1
Minimum order quantity	10
Catalog page	Page 620 (CC-2011)
GTIN	 4 017918 936259
Custom tariff number	85472000
Country of origin	GERMANY

### Technical data

#### General

Housing type	Complete housing
Housing material	Polyamide
Color	light gray

#### Dimensions / positions

# Electronic housing - ME MAX 22.5 3-3 KMGY - 2713939

## Technical data

### Dimensions / positions

Length	99 mm
Constructional height	114.5 mm
Width	22.5 mm
Number of positions	24

### Technical data

Ambient temperature (operation)	-40 °C ... 105 °C
Inflammability class according to UL 94	V0
Power dissipation at 20°C in the horizontal mounting position	6.1 W 12.1 W

## Classifications

### ETIM

ETIM 2.0	EC001031
ETIM 3.0	EC001031
ETIM 4.0	EC001031
ETIM 5.0	EC001031

### UNSPSC

UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501
UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501

### eCl@ss

eCl@ss 4.0	27180401
eCl@ss 4.1	27180401
eCl@ss 5.0	27180506
eCl@ss 5.1	27180506
eCl@ss 6.0	27180802
eCl@ss 7.0	27182702

## Approvals

### Approvals

#### Approvals

UL Recognized / cUL Recognized / cULus Recognized

#### Ex Approvals


## Electronic housing - ME MAX 22.5 3-3 KMGY - 2713939


### Approvals


Approvals submitted

---

#### Approval details

UL Recognized 

cUL Recognized 

cULus Recognized 

### Accessories

Accessories

Plug/Adapter

Electronic housing - ME FE-CONTACT - 2908294




Functional earth ground contact, for intermediate elements.

---

### Drawings


# Electronic housing - ME MAX 22.5 3-3 KMGY - 2713939

Dimensioned drawing

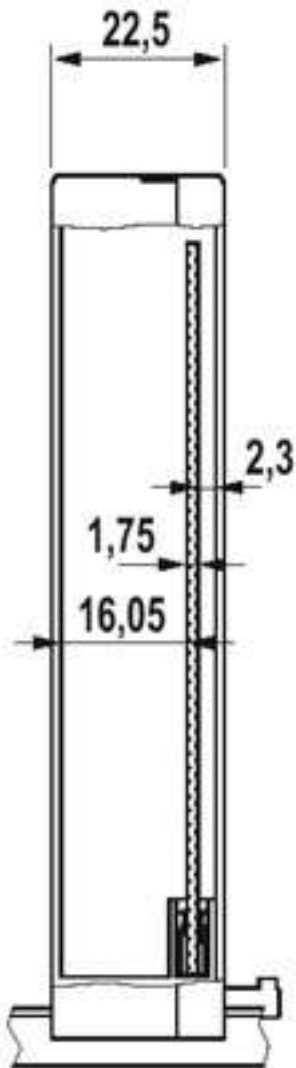

# Electronic housing - ME MAX 22.5 3-3 KMGY - 2713939


Dimensioned drawing

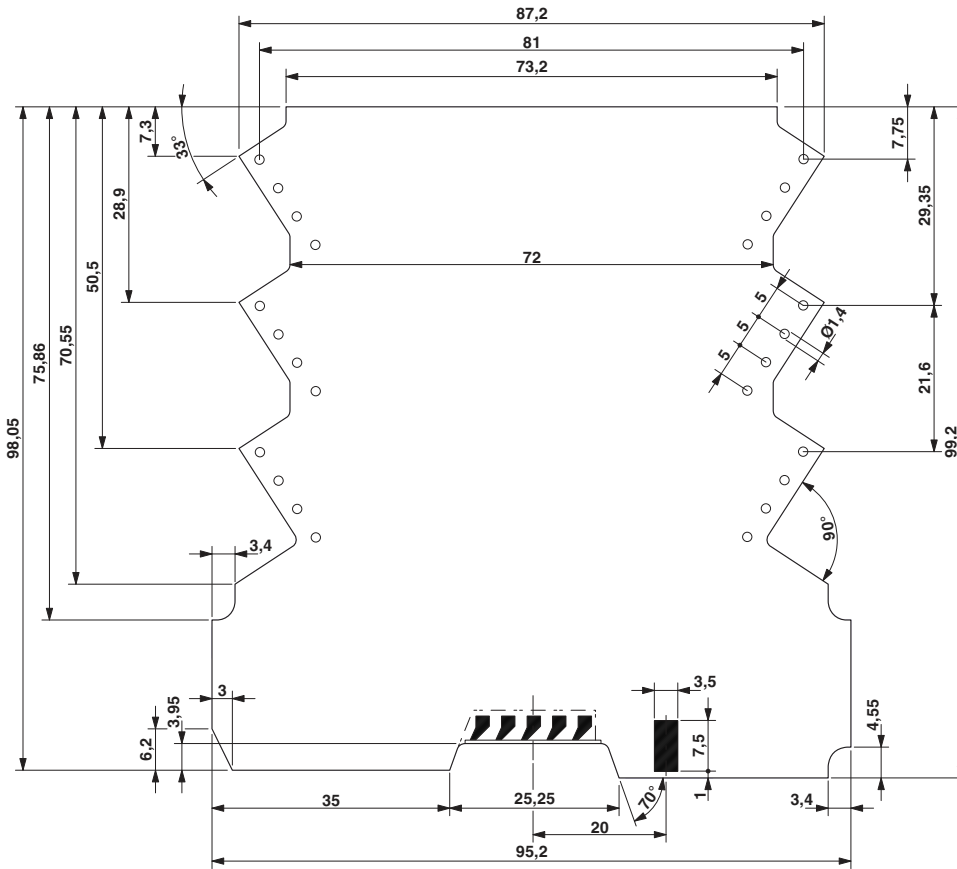

Dimensional drawing of the ME MAX 3-3 printed circuit board, for printed circuit terminal block connection (MKDSO), view: component side

# Electronic housing - ME MAX 22.5 3-3 KMGY - 2713939


Dimensioned drawing

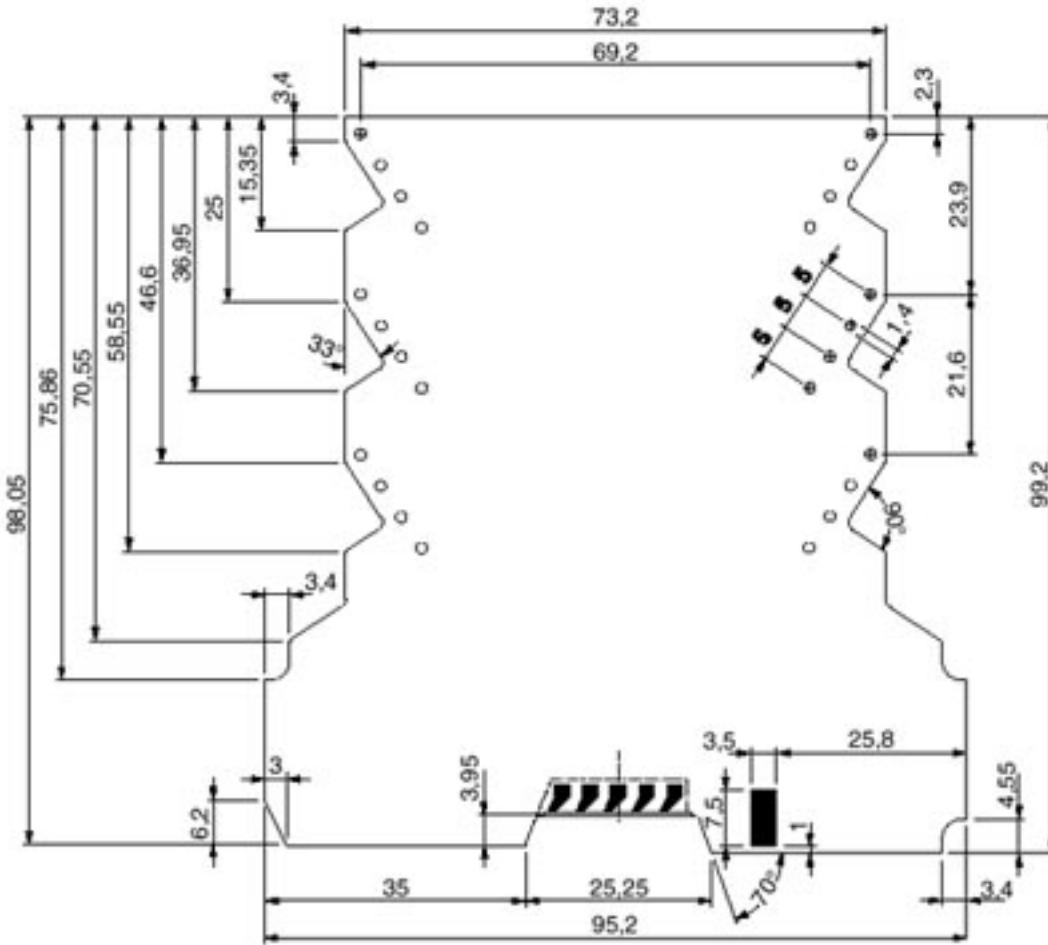

Dimensional drawing of the ME MAX 3-3 printed circuit board for plug connection (MSTBO), view: component side

# Electronic housing - ME MAX 22.5 3-3 KMGY - 2713939

Drilling diagram

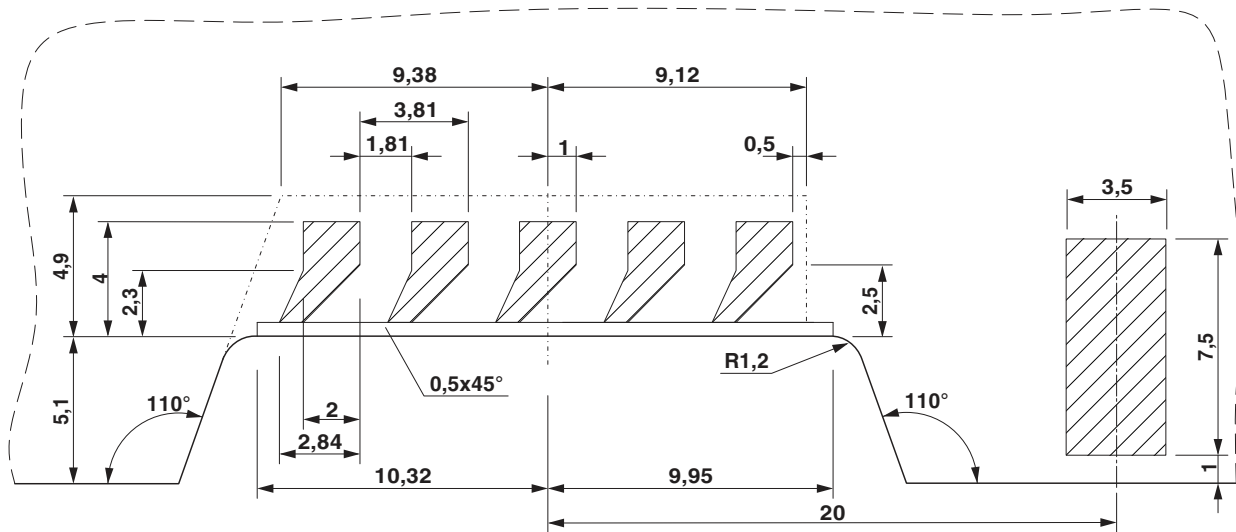



---

© Phoenix Contact 2012 - all rights reserved  
<http://www.phoenixcontact.com>