


- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK. POST: COPPER ALLOY
- FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA, OVER 0.00127 [.000050] NICKEL, ENTIRE POST.

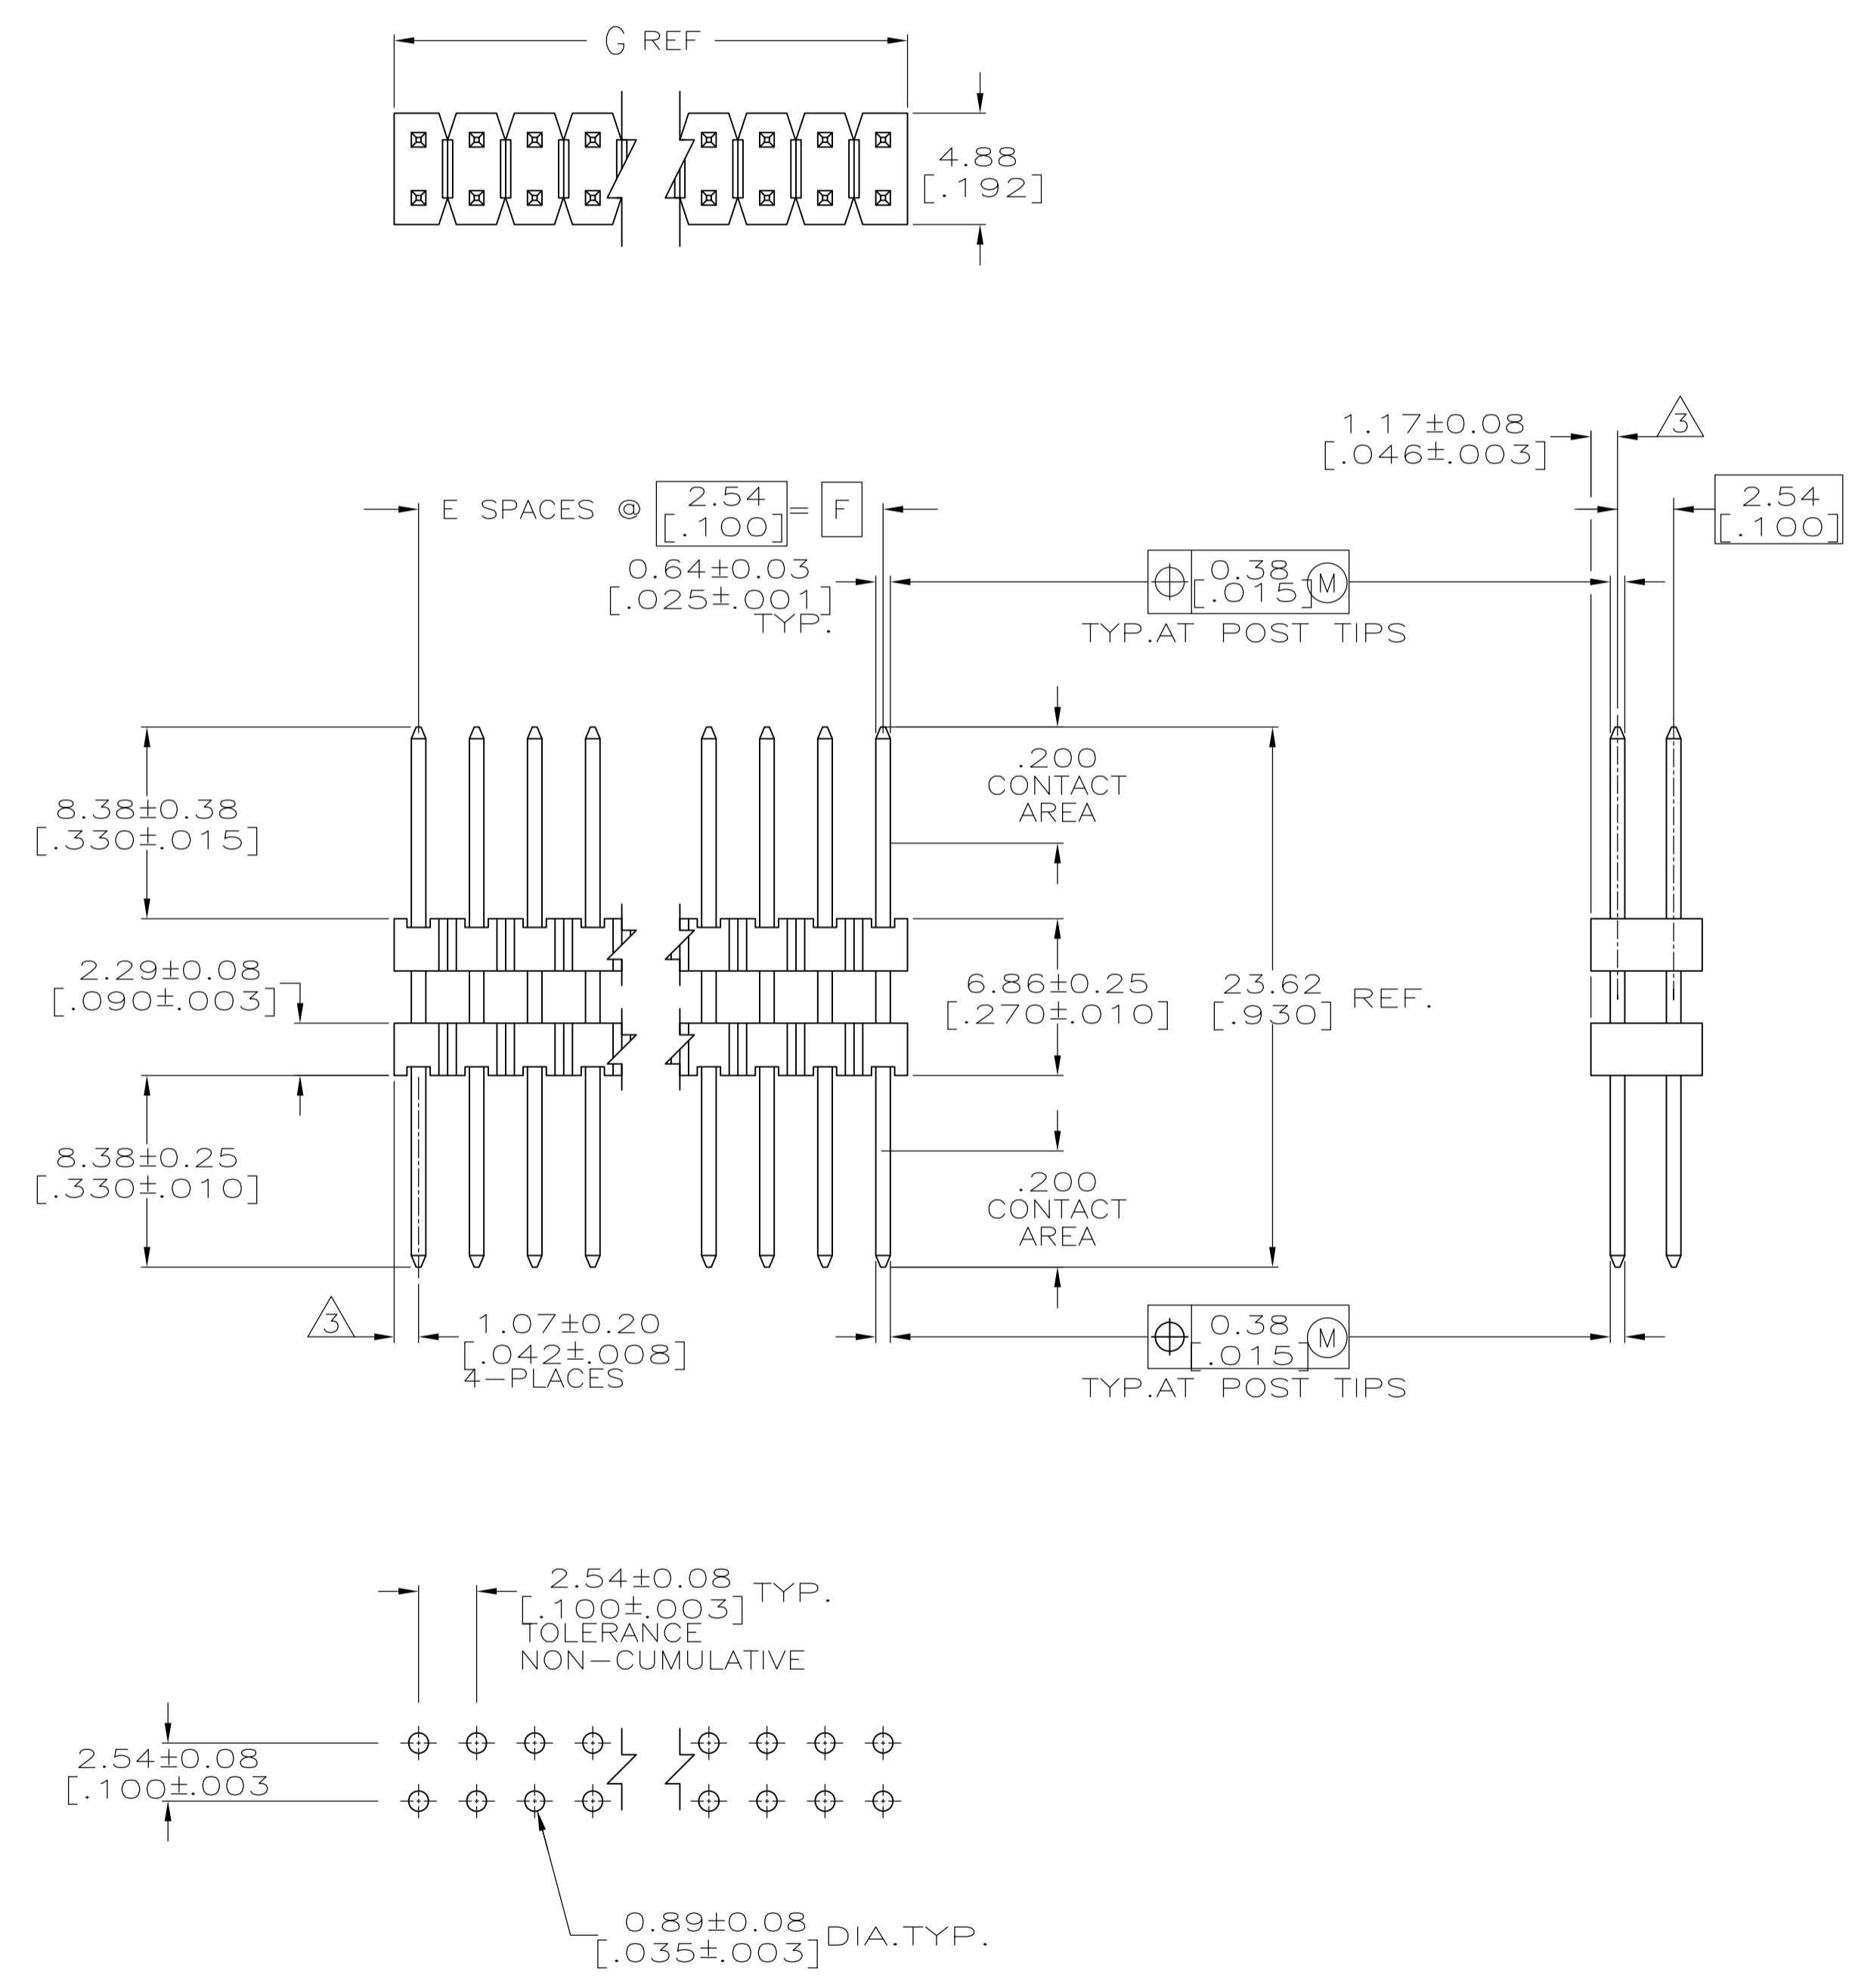

RECOMMENDED HOLE LAYOUT

LOC	DIST	REV	DATE	DWN	APVD
AD	39				
A	REVISED PER ECO-14-000264		15JUL2014	NK	MM

NO. OF POSITIONS	PART NUMBER
39	4-146495-0
38	3-146495-9
37	3-146495-8
36	3-146495-7
35	3-146495-6
34	3-146495-5
33	3-146495-4
32	3-146495-3
31	3-146495-2
30	3-146495-1
29	3-146495-0
28	2-146495-9
27	2-146495-8
26	2-146495-7
25	2-146495-6
24	2-146495-5
23	2-146495-4
22	2-146495-3
21	2-146495-2
20	2-146495-1
19	2-146495-0
18	1-146495-9
17	1-146495-8
16	1-146495-7
15	1-146495-6
14	1-146495-5
13	1-146495-4
12	1-146495-3
11	1-146495-2
10	1-146495-1
9	1-146495-0
8	146495-9
7	146495-8
6	146495-7
5	146495-6
4	146495-5
3	146495-4
2	146495-3
1	146495-2
-	146495-1
-	146495-0

THIS DRAWING IS A CONTROLLED DOCUMENT.

<p>0 PLC ± -</p> <p>1 PLC ± -</p> <p>2 PLC ± 0.51(.02)</p> <p>3 PLC ± 0.12(.005)</p> <p>4 PLC ± 0.012(.0005)</p> <p>ANGLES ± -</p>	<p>DIN T. HOFFMAN 12/5/95</p> <p>CHK G. DUBNICZKI 1/2/96</p> <p>APVD G. DUBNICZKI 1/2/96</p>	<p>NAME</p> <p>PRODUCT SPEC</p> <p>APPLICATION SPEC</p> <p>WEIGHT</p>	<p>SIZE</p> <p>CAGE CODE</p> <p>DRAWING NO</p> <p>RESTRICTED TO</p>
--	--	---	---

STE TE Connectivity

HEADER ASSEMBLY, MOD II, STACKING, DOUBLE ROW, .025 SQ.POST, UNSHROUDED

SCALE 4:1 SHEET 1 OF 1 REV A