


CUSTOMER DATA SHEET

TOLERANCE UNLESS OTHERWISE SPECIFIED
 DECIMALS $\pm .005$ FRACTIONAL $\pm 1/64$

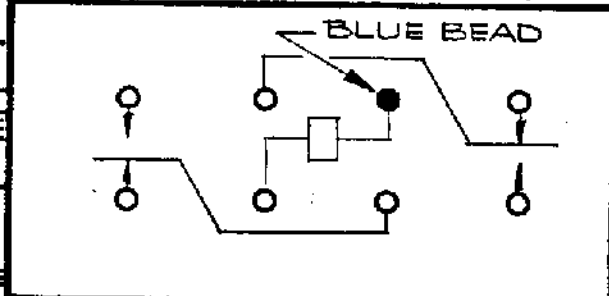

CONTACT RATING:
 2A @ 28VDC RES. 100,000 OPERATIONS
 10mA @ 30mV RES. 100,000 OPERATIONS

DR. 3-22-79 CK. JAL

Communications Instruments, Inc.

HFW 1106 K12

COIL: @ 25°C	
WINDING # 1	WINDING # 2
700 OHMS $\pm 10\%$	OHMS
13.5 VDC MUST OPERATE	MUST OPERATE
1.5 VDC MUST RELEASE	

ENVIRONMENT:
 VIBRATION 10 CPS TO 3000 CPS @ 30 g's
 SHOCK 100 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: NOMINAL VOLTAGE 26.5VDC

CUST. QPL
 CUST. NO. M39016/6-128L

TYPE "HFW" RELAY