




Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriete de c FCI. Droits de reproduction FCI.




All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

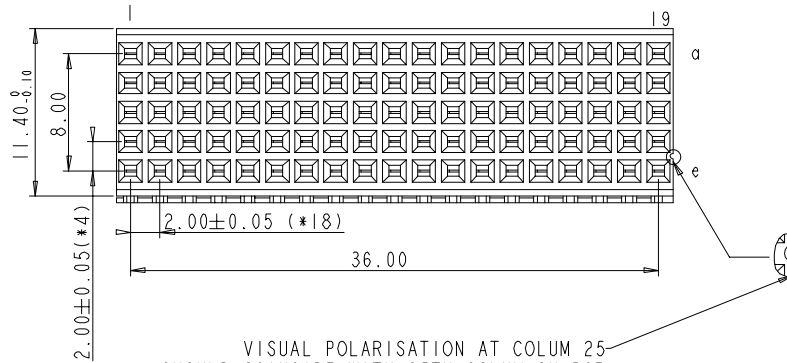

VISUAL POLARISATION AT COLUM 25 SHOULD COINCIDE WITH 25TH COLUM ON PCB

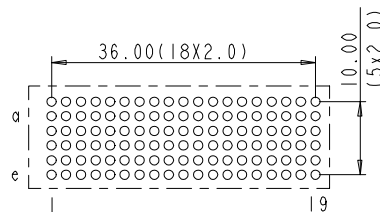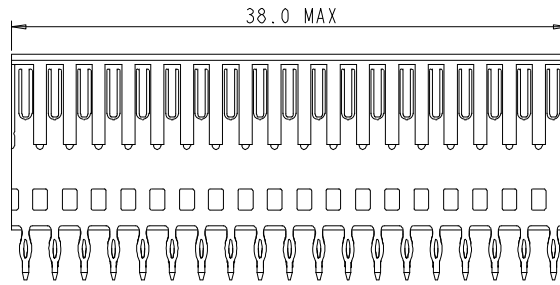

LAY-OUT P.C.B. - HOLE (FRONT SIDE)

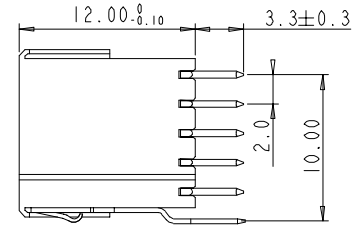

PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE : 500 V AC (CONT /CONT)
OPERATING TEMPERATURE : -55°C TO 125°C
CONTACT RESISTANCE 20 mΩ MAX
INSERTION FORCE : 0.75N MAX/CONT
EXTRACTION FORCE : 0.15N MIN/CONT
INSULATION RESISTANCE : 10⁴ MΩ MIN

NOTES

- LEAD FREE INDICATOR : LF=LEAD FREE
- THIS PRODUCT IS CSA APPROVED. THIS PRODUCT IS UL RECOGNIZED.
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

rev	ecn no	dr	date
A	CONVERSION REVISION 00	KN	14-09-01
B	104-0109	ALEX B	27-11-04
C	DG05-0278	Kason	02-08-05
D	DG10-0110	NZ	2010.9.3
-	-	-	-
-	-	-	-

Material		Spec ref	
Mat code		✓	
Heatreat		tolerance 1DEC±0.2 1DEC 2DEC±0.1 2DEC ANGLES±1° HOEKEN	
Plating/Finish		projection ⊕	
Dr	M.Fret	03-08-99	MM
Eng	Product family MILLIPICS		size A4
Chr	Model Name		Scale 2.000
Appr	Model Revision		REL Level
FCI		title MILLIPACS 2 / TYPE B / SHIELDED	
Pro/E file		catalog no HM2S7IPE510F----	Rev. D
		dwg no BSC201907022	
		CUSTOMER DRAWING	sheet 1 of 1